



**MANUAL**  
OPERATION



**RECESS**  
POSSIBLE




**EASY**  
TO BEND

## FOREST KS<sup>®</sup> *Klick System*

Highly efficient hand drawn system for all types of medium and light weight draperies.  
Quick installation with "Smart Klick" brackets for wall and ceiling applications.

THE WORLD  
BEHIND  
YOUR  
CURTAINS

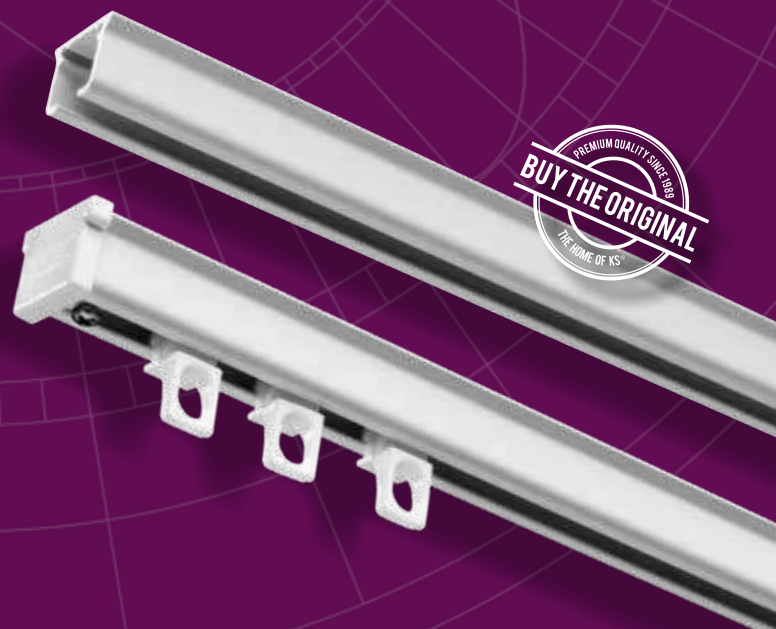

# FOREST KS®





## PRODUCT INFORMATION

- Highly efficient hand drawn system for all types of medium weight draperies.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications with cover caps that conceal the screws.
- Bendable; it can be bent and reversed bent using a 10 cm (4") radius or continuous curve.
- Suitable for special window decoration as circular, arch and triangle window models.
- Heavy duty clickable carriers, UV-protected, for smooth and easy traversing.  
Offset shape for straight hanging pleats.
- Can also be used for Forest Easyfold System and accordiafold drapery systems.
- Maximum fabric weight: 8 kg per meter (6 LBS per ft.).
- Colours available: white, gold, grey, brown, black, cream, & beige.
- Special colours: available on request.
- Available lengths: 3 meter (9'10"), 4 meter (13'1"), 5 meter (16'4"), 6 meter (19'8"), 7 meter (23').
- Track finish: High quality aluminium, powder coated with a factory applied patented dry lubricant.

## PROFILE

- Shown actual size 1:1.
- Aluminium Extrusion.
- Weight: 150 grams per meter (1.62 ounce per ft.).
- Dimensions: 14 mm x 20 mm (0,6" x 0,8").
- KS Recess: 12,5 mm x 21 mm (0,5" x 0,8")

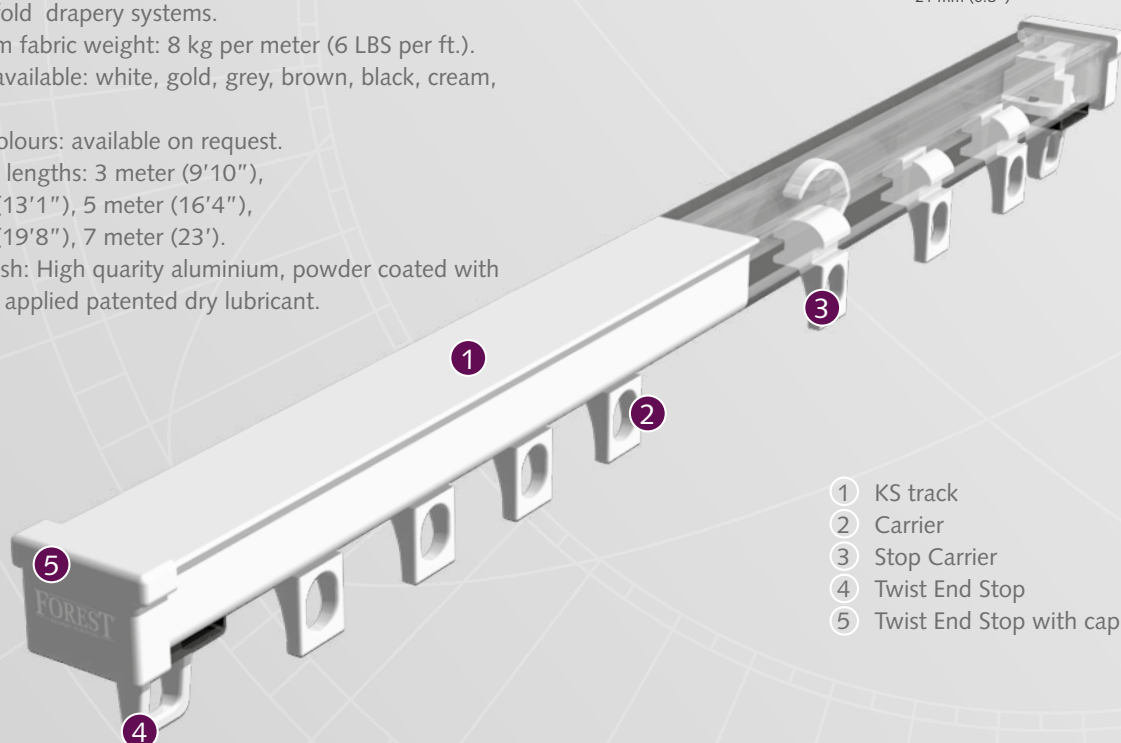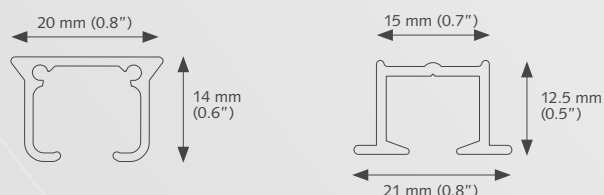


- ① KS track
- ② Carrier
- ③ Stop Carrier
- ④ Twist End Stop
- ⑤ Twist End Stop with cap




## FOR USE IN

Hotels - offices - schools - healthcare - residences - boats - campers - planes or at any location where an efficient hand drawn system is required.



Easy installation  
click - position - tighten



clickable carrier

25 mm (1")


## BENDING / CURVING

The track can be curved and reversed curved using a 10 cm (4") radius. Additionally there is a curving possibility for special windows like arches, bows and circles. Bending instructions available on request.




## SPECIAL WINDOW DECORATION

Special bends

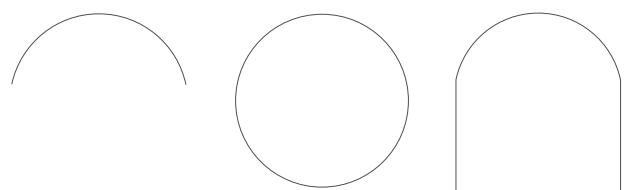

## APPLICATIONS

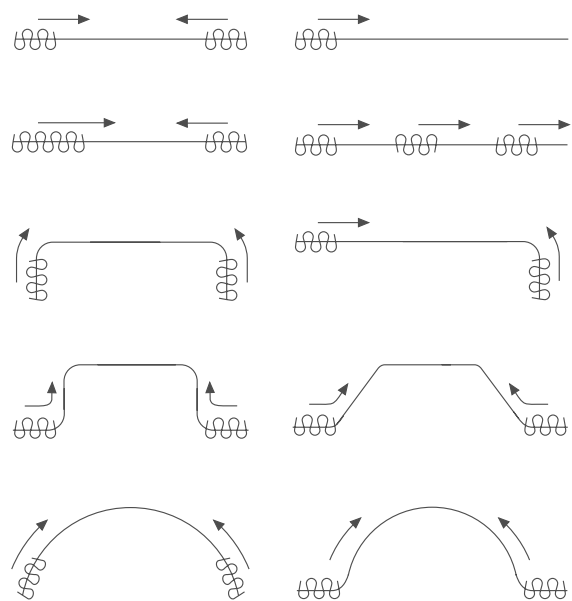


## MOUNTING BRACKETS

### Wall bracket

3.5 cm (1.4")


6 cm (2.4")

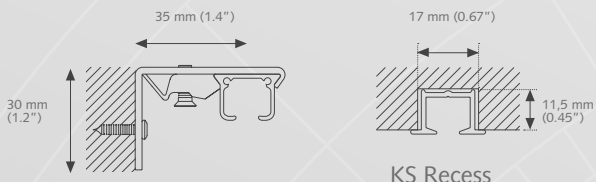

A) Min. 10 cm (4")




A) Min. 16 cm (6")

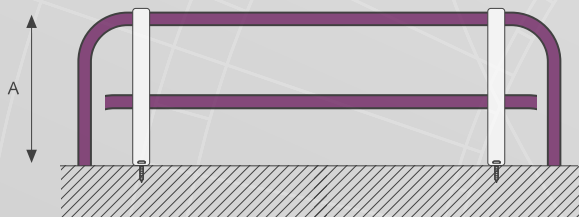

Other brackets are available. Brackets need to be placed every 60 cm (24").


### Smart Click Ceiling Bracket

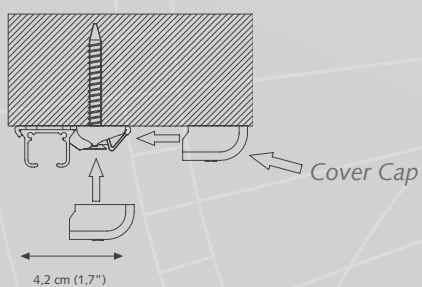

### Aluminium Wall bracket single

A) 7.5 cm (3") B) 6.3 cm (2.5")


A) 10 cm (4") B) 8.8 cm (3.5")

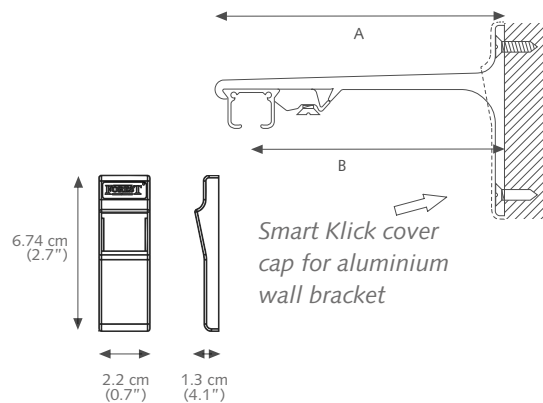

### Aluminium Wall bracket double


A) 15 cm (6") B) 9.2 cm (3.6") C) 4.5 cm (1.8")










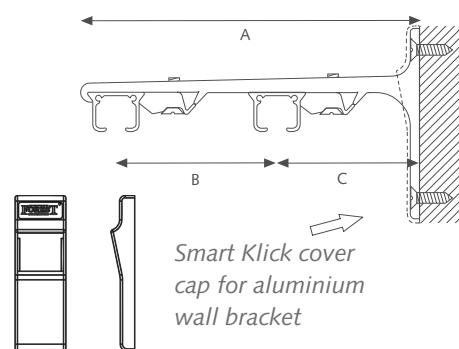


A) 20 cm (8") B) 9.2 cm (3.6") C) 9.5 cm (3.7")
























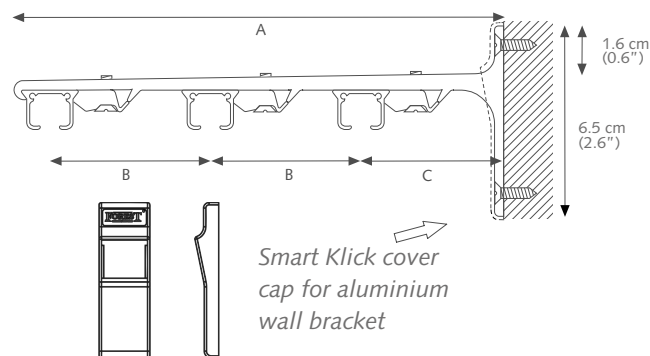






### Aluminium Wall bracket triple














A) 25 cm (10") B) 9.3 cm (3.7") C) 5 cm (2")



KS	KS RECESS	ARTICLE	PACKING UNIT		ART.NR
●		KS TRACK WHITE Aluminium extrusion, powder coated, lubricated.	60 mtr/bundle 80 mtr/bundle 100 mtr/bundle 120 mtr/bundle 140 mtr/bundle	3 mtr (9'8") 4 mtr (13'1") 5 mtr (16'4") 6 mtr (19'8") 7 mtr (23')	1001001300 1001001400 1001001500 1001001600 1001001700
		KS TRACK GREY Aluminium extrusion, powder coated, lubricated.	120 mtr/bundle 140 mtr/bundle	6 mtr (19'8") 7 mtr (23')	1001003600 1001003700
		KS TRACK GOLD Aluminium extrusion, powder coated, lubricated	120 mtr/bundle	6 mtr (19'8")	1001002600
		KS TRACK BROWN Aluminium extrusion, powder coated, lubricated.	120 mtr/bundle	6 mtr (19'8")	1001005600
		KS TRACK BLACK Aluminium extrusion, powder coated, lubricated.	100 mtr/bundle 120 mtr/bundle 140 mtr/bundle	5 mtr (16'4") 6 mtr (19'8") 7 mtr (23")	1001006500 1001006600 1001006700
		KS TRACK MORE COLOUR OPTIONS Aluminium extrusion, powder coated, lubricated. off-white sand	100 mtr/bundle	5 mtr (16'4") 5 mtr (16'4")	1001011500 1001012500
	●	 KS RECESS TRACK 6 Mtr (19'8") Aluminium extrusion, powder coated, lubricated and pre-drilled.	6 mtr/length	white black	1031011600 1031016600
	●	 MTS FLEXIBLE DUST STRIP. To seal the curtain track opening of the ks recess track during finishing phase.	50 mtr/roll		4518501000
●		 KS TRACK CONNECTORPIN STAINLESS 2X20 MM For a firm and seamless connection between two pieces of KS track.	10/box		9900000012
●		 KS/DS/CKS TRACK CONNECTOR	10/box	white grey black	1018401010 1018403010 1018406010
●		 KS PLASTIC TRACK CONNECTOR Can be inserted in the track, but still allows the carrier to run over.	50/box		1018400000
	●	 KS RECESS INTERNAL CONNECTOR MOUNTING SET FOR INTERNAL TRACK CONNECTOR (set consists 200 screws & 2 drill bits)	50/box 1/set		1030000001 8880000001
	●	 SCREW M3 X 25MM FOR KS RECESS PROFILE STAINLESS STEEL	250/box		Forest073
●	●	 KS AS CARRIER "Clickable", offset, constructed of UV-resistant plastic. 10 Carriers on a break-away strip. Can be clicked in after installation.	500/box	white grey brown black	1010001000 1010003000 1010005000 1010006000
●	●	 KS SYMMETRICAL CARRIER	500/box	white	1010101000
●		 KS STOPCARRIER Prevents slide back, "clickable", constructed of UV-resistant plastic. Not in combination with KS plastic track connector & KS recess connector.	250/box	white grey black	1010201000 1010203000 1010206000
●	●	 KS SHIRRTAPE CARRIER Carrier and hook in one "clickable" unit, constructed of UV-resistant plastic. For sew on drapery tape.	500/box	white grey black	1010401000 1010403000 1010406000

KS	KS RECESS	ARTICLE	PACKING UNIT	ART.NR
●		 MASTER CARRIER/REVERSIBLE Reversible overlap carrier, "Klicks" into track, constructed of UV-resistant plastic. For straight track only. Colours: 01.	25/box	1010301000
●	●	 EASYFOLD PLASTIC MASTER UNDERLAP The Plastic Master is reversible. There are also snaps on the back of the Master.	25/box	white transparent grey black 4815201010 4815201000 4815203010 4815206010
●	●	 EASYFOLD PLASTIC MASTER STRAIGHT The Plastic Master is reversible. There are also snaps on the back of the Master.	25/box	white transparent grey black 4815101010 4815101000 4815103010 4815106010
●	●	 KS TWIST ENDSTOP "Twists" into track, with metal plate, constructed of UV-resistant plastic.	100/box	white grey black 1016201000 1016203000 1016206000
●		 KS TWIST ENDSTOP WITH CAP "Twists" into track, with metal plate and end cap, constructed of UV-resistant plastic.	100/box	white grey black 1016301000 1016303000 1016306000
	●	 KS RECESS PUNCH ENDSTOP To cover the slot	100/box	white black 1060601000 1060606000
●		 KS ENDCAP + SCREW SHORT To be used for a single draw curtain.	100/box	white grey black 1006001000 1006003000 1006006000
●		 EASYFOLD KS UNIVERSAL ENDCAP WITH SCREW To be screwed with an Easyfold carrier, made of UV-resistant plastic.	100/box	white grey brown black 4816001000-A 4816003000-A 4816005000 4816006000-A
●		 KS WALL SUPPORT RIGHT 2,5 x 5 cm (1"x2") return plate, powder coated.	25/box	white grey 1016601000 1016603000
		 KS WALL SUPPORT LEFT 2,5 x 5 cm (1"x2") return plate, powder coated.		white grey 1016701000 1016703000
●		 STRAIGHT RETURN R/L 5 x 5 cm (2 x 2") reversible return plate, powder coated.	25/box	white brown 1016501000 1016505000
●		 MTS SUSPENSION CEILING BRACKET INCL TUBE Ceiling Bracket for KS. To be used in combination with the Suspension Ceiling Bracket. Length: 10 cm (4") - 100 cm (40") Complete with MTS Insert Screw and MTS Top Piece	1/each	white 4518201000
		MTS SUSPENSION CEILING BRACKET 1,50 MTR WHITE Length: 100 cm (40") - 150 cm (59") Complete with MTS insert screw and MTS Top Piece	1/each	white black 4518201500 4518206150
		MTS SUSPENSION CEILING BRACKET 2,00 MTR WHITE Length: 200 cm (78") Complete with MTS insert screw and MTS Top Piece	1/each	white 4518202000
●		 SUSPENSION BRACKET CLIP FOR KS For KS, to be used in combination with the MTS Suspension Ceiling Bracket.	50/box	white black 1016901000 1016906000
●		 KS CEILING BRACKET Slides onto the track, powder coated. Regular duty.	100/box	white grey brown black 1018001000 1018003000 1018005000 1018006000
●		 KS CEILING BRACKET WITH SLOT Slides onto the track, powder coated. Regular duty.	100/box	white gold grey brown black 1018101000 1018102000 1018103000 1018105000 1018106000
●		 KS SMART KLICK CEILING BRACKET "Klicks" onto track, powder coated.	100/box	white grey black 1018201000 1018203000 1018206000

KS	KS RECESS	ARTICLE	PACKING UNIT		ART.NR
●		 KS SMART KLICK CEILING BRACKET INCL COVER CAP "Klicks" onto track, powder coated.	100/box	white grey black	1018201001 1018203001 1018206001
●		 KS SMART KLICK COVER CAP Fits on Smart Klick Wall and Ceiling bracket.	100/box	white grey brown black	1019201000 1019203000 1019205000 1019206000
●		 FALSE CEILING BRACKET (METAL) For installation on to a suspended ceiling. The track can be fixed in any angle.	25/box	white black	4519001000 4519006000
●		 KS SMART KLICK CEILING BRACKET DOUBLE LONG Distance between two tracks: 90 mm (3,5")	30/box	white grey black	1018601000 1018603000 1018606000
		KS SMART KLICK CEILING BRACKET DOUBLE SHORT Distance between two tracks: 60 mm			1018611000
●		 FSS MOUNTING BRACKET For concealed installation or ceiling installation in narrow spaces. Heavy Duty.	100/box		7160001000
●		 KS CEILING SPLICE BRACKET For ceiling installation only, powder coated.	50/box	white black	1018501000 1018506000
●		 KS KLICK-ON CEILING BRACKET WHITE For concealed installation without visible brackets, light weight use only. Use with countersunk screw 3x25mm	100/box	wit grey black	1018301000 1018303000 1018306000
●		 KS SK WALL BRACKET 3,5 cm "Klicks" onto track, powder coated. One screw attachment. Maximum load: 20 kg/mtr.	50/box	white grey black	1020201035 1020203035 1020206035
		KS SK WALL BRACKET 6 cm "Klicks" onto track, powder coated. One screw attachment. Maximum load: 15 kg/mtr.		white grey black	1020201060 1020203060 1020206060
●		 KS SK WALL BRACKET 7,5 cm Maximum load: 12,5 kg/mtr.	30/box	white grey black	1020201075 1020203075 1020206075
		KS SK WALL BRACKET 10 cm Maximum load: 10 kg/mtr.	20/box	white grey black	1020201100 1020203100 1020206100
		KS SK WALL BRACKET 12,5 cm Maximum load: 2 kg/mtr.	20/box	white grey	1020201125 1020203125
		KS SK WALL BRACKET 15 cm Maximum load: 2 kg/mtr.	15/box	white grey black	1020201150 1020203150 1020206150
		KS SK WALL BRACKET 20 cm, maximum load: 2 kg/mtr. KS SK WALL BRACKET 25 cm KS SK WALL BRACKET 30 cm	15/box 10/box 10/box	white white white	1020201200 1020201250 1020201300
●		 KS SMART KLICK WALL BRACKET DOUBLE 10 cm Maximum load: 10 kg/mtr.	15/box	white	1020601100
		KS SMART KLICK WALL BRACKET DOUBLE 15 cm Maximum load: 2 kg/mtr.	15/box	white	1020601150
		KS SMART KLICK WALL BRACKET DOUBLE 20 cm Maximum load: 2 kg/mtr.	15/box	white	1020601200
●		 KS ADJUSTABLE WALL BRACKET, SINGLE	100/box	white	1020801115
●		 KS ADJUSTABLE WALL BRACKET, DOUBLE	50/box	white	1020801195

KS	KS RECESS	ARTICLE		PACKING UNIT		ART.NR
●			KS SMART KLIK ALUMINIUM WALL BRACKET 7,5 cm Maximum load: 25 kg/mtr.	20/box	white grey brown black	1020301075 1020303075 1020305075 1020306075
			KS SMART KLIK ALUMINIUM WALL BRACKET 10 cm Maximum load: 20 kg/mtr.	20/box	white grey black	1020301100 1020303100 1020306100
			KS SMART KLIK ALUMINIUM WALL BRACKET 15 cm Maximum load: 13 kg/mtr.	15/box	white grey brown black	1020301150 1020303150 1020305150 1020306150
			KS SMART KLIK ALUMINIUM WALL BRACKET 20 cm Maximum load: 9 kg/mtr.	15/box	white grey black	1020301200 1020303200 1020306200
			KS SMART KLIK ALUMINIUM WALL BRACKET 25 cm Maximum load: 5 kg/mtr.	10/box	white grey	1020301250 1020303250
●			COVER CAP FOR KS SMART KLIK ALUMINIUM WALL BRACKET	50/box	white grey black	1021301000 1021303000 1021306000
●	●		KS FLICKSTICK FIBERGLASS	50/box	92 cm 122 cm 152 cm	1065101092 1065101122 1065101152
			KS FLICKSTICK TRANSPARENT	50/box	92 cm 122 cm 152 cm	1065102092 1065102122 1065102152
			KS FLICKSTICK WHITE ALUMINIUM	50/box	92 cm 122 cm 152 cm	1065111092 1065111122 1065111152
			KS FLICKSTICK Grey ALUMINIUM	50/box	202 cm 92 cm 122 cm	1065111202 1065113092 1065113122
			KS FLICKSTICK BLACK ALUMINIUM	50/box	152 cm 92 cm 152 cm	1065113152 1065116092 1065116152
			KS FLICKSTICK ANTIQUE ALUMINIUM	50/box	92 cm 122 cm 152 cm	1065119092 1065119122 1065119152
●	●		COMPACT BENDING TOOL - For KS / KS RECESS / CKS KS BENDING WHEEL ALL-IN incl. strips + wedges KS RECESS BENDING WHEEL ALL-IN incl. strips + wedges	1/each		1050000000 1050100000 1030000000
●			CONTINUOUS CURVER Add on tool for the Compact Bending Tool. Designed to create continuous curves and arches in any radius. Includes KS bending strip. For KS and CKS Track only.	1/each		1060200000
●	●		ELECTRIC POWERED BENDER Available in 230V or 115V To create continious curves and arches minimum radius 50 cm (20")	1/each		1060500000
	●		CHANNEL PROTECTOR with bit	1/set	purple	1070600000
	●		KS RECESS PUNCH PINCHER	1/each		1060600000
●	●		KS BENDING STRIP For Compact Bending Tool.	1/each		1060100000
			KS RECESS BENDING STRIP Length of strip: 60 cm (23,6"). 2 strips	1/each 2/each		8500000000-A 1030000000-D
			FOR CONTINUOUS CURVER/ELECTRIC BENDER. KS Length of strip: 7 mtr. (23').	1/each		1060300000
			KS RECESS Length of strip: 7 mtr. (23').	1/each		8500000010
●	●		KS/CKS BENDING WHEELS - For Electric Powered Bender. Complete set of 3 wheels.	1/set		1060700000
			KS RECESS BENDING WHEELS - For Electric Powered Bender. Complete set of 3 wheels.	1/set		1030700000
●	●		KS/DS BENDING CASE Box for storing all bending components of the KS system. Dimensions: 40x30x33.5 cm. Box excludes all components.	1/each		1050000001
●	●		ELECTRIC POWERED RAILCUTTER 230 Volt EU	1/each		1061100000
			BLADE FOREST CUTTER NEW MODEL	1/each		1061200001
●			TABLE DISPLAY KS-DS-DS-DS-XL	1/each		9902100002



**MANUAL**  
OPERATION



**RECESS**  
OPTION



**HOTEL**  
TRACK

## **FOREST CS<sup>®</sup>** *Contract System*

Heavy duty hand drawn curtain track system for medium and heavy draperies.

FOREST CS<sup>®</sup>  
FOREST CS<sup>®</sup> Recess

THE WORLD  
BEHIND  
YOUR  
CURTAINS






## PRODUCT INFORMATION

- Heavy duty hand drawn system for medium and heavy draperies.
- Bendable; it can be bent and reverse bent using a 20 cm (8") radius or continuous curve.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected. Can also be used with ball bearing carriers.
- Ideal for use with overlap masters and batons which can be mounted behind or in front of draperies.
- Can also be used for the Forest Wave System (FES) and accordiafold drapery systems.
- Maximum fabric weight: CS: 15 kg p/m, CS Recess: 10 kg p/m.
- Colours available: white, black and grey.
- Track finish: High quality aluminium, powder coated with a factory applied patented dry lubricant.
- Available lengths: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 6.10 m (20').
- Warranty: 10 years

- 1 CS Track
- 2 Carrier
- 3 Master Carrier R/L Overlap
- 4 Master Carrier R/L Underlap
- 5 Ball bearing carrier
- 6 Endcap with screw

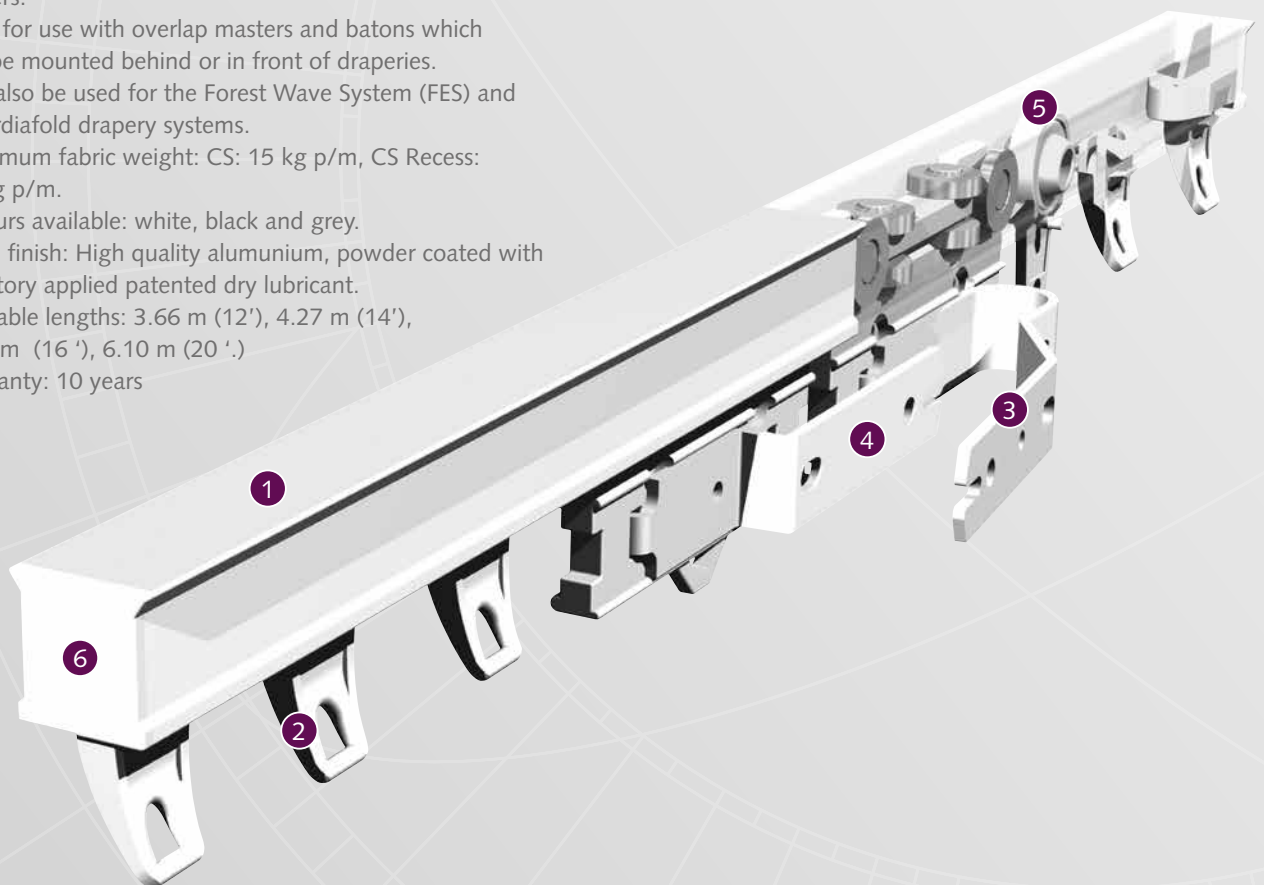



## CS RECESS

Our CS® is now also offered as the CS® Recess model. Special care and attention have been given to the track joining method and endcaps. The CS® Recess brings a touch of luxury to any space with its seamless ceiling integration, providing a refined and graceful finish. Equipped with the innovative silent roller glider, it ensures ultra-smooth and whisper-quiet curtain operation. Available in matt white and matt black.

## BENDING / CURVING


The CS® and CS® Recess can be bent and reverse bent using a 20 cm (8") radius. Continuous curving is also possible with the electrical bending tool (only possible with CS rail).



## PROFILE


CS:

- Weight: 235 gr/mtr (2.53 ounce - ft)
- 20 mm x 20 mm (0,8" x 0,8")
- Aluminium Extrusion



CS Recess:

- Weight: 385 gr/mtr (4.14 ounce - ft)
- 23 x 23 mm (0,9" x 0,9")
- Pre-drilled: holes every 25 cm




## FOR USE IN

Hotels - Motels - offices - schools - healthcare residential or at any location where a heavy duty hand drawn system is required.




Easy installation  
click - position - tighten




clickable carrier

38 mm (1,5")

## APPLICATIONS

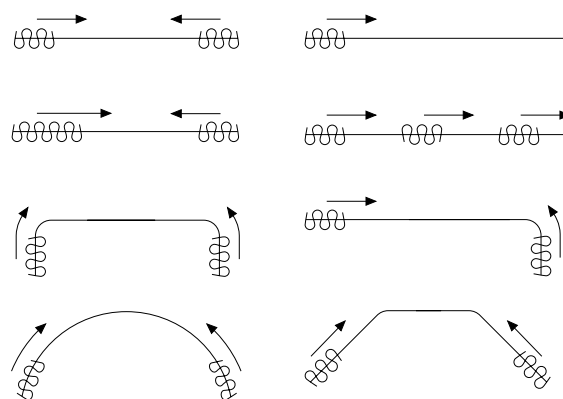




## CLICK-ON STIFFENER

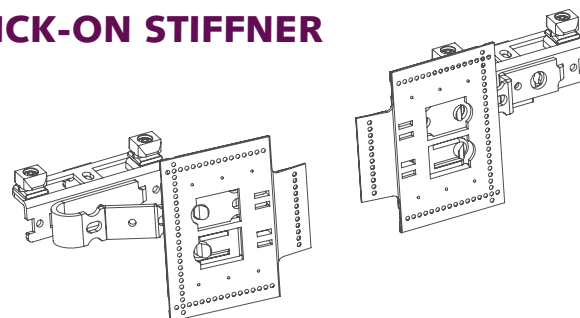

For applications where the curtains are treated very roughly, the stiffener is a sustainable solution. The stiffener makes curtains more robust and ensures that curtains last longer. Especially useful for hotels.

## MOUNTING BRACKETS

### Smart Klick Ceiling bracket

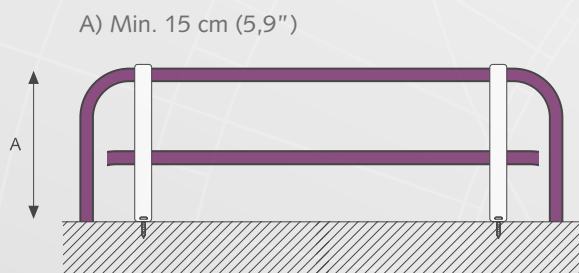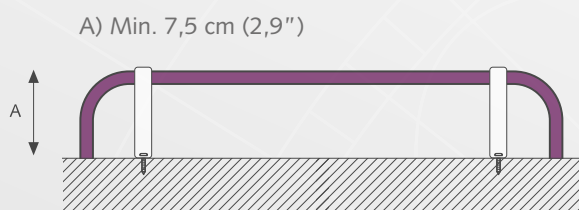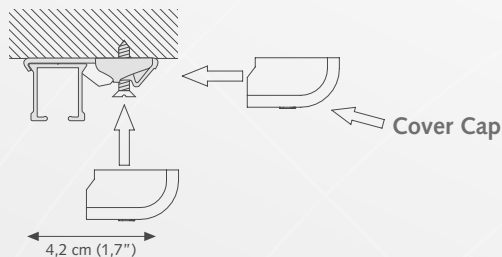


Other brackets are available. Brackets need to be placed every 60 cm (24'').

### SK Aluminium Wall bracket single

A) 7,5 cm (3'') B) 6,3 cm (2,5'')


A) 10 cm (4'') B) 8,8 cm (3,5'')

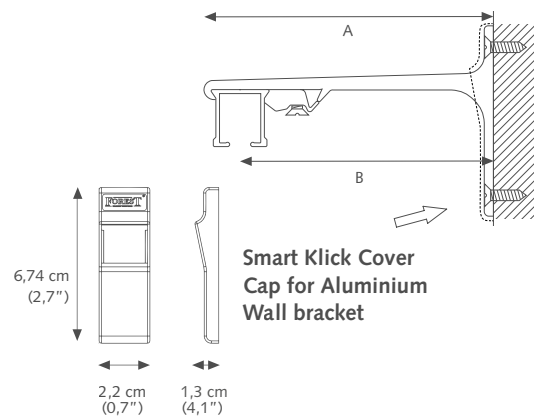

### SK Aluminium Wall bracket double


A) 15 cm (6'') B) 9,2 cm (3,6'') C) 4,5 cm (1,8'')

A) 20 cm (8'') B) 9,2 cm (3,6'') C) 9,5 cm (3,7'')


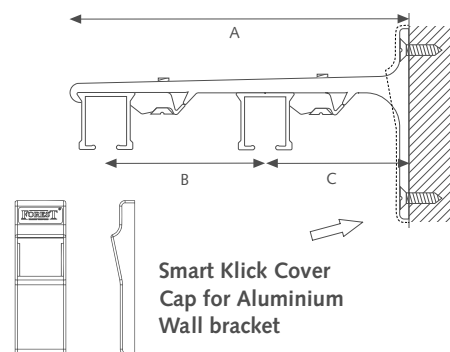
















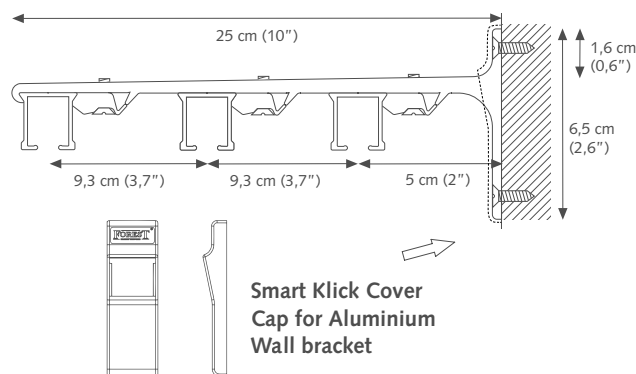













### SK Aluminium Wall bracket triple









A) 25 cm (10'')













Brackets need to be placed every 50 - 60 cm (20''-24''), depending on fabric weight.

CS	CS RECESS	ARTICLE		PACKING UNIT		ART.NR
●			CS TRACK WHITE Extruded aluminium, powder coating, factory lubricated.	10/bundle	3,66 meter (12') 4,27 meter (14') 4,88 meter (16') 6,10 meter (20')	2501001366 2501001427 2501001488 2501001610
			CS TRACK GREY Extruded aluminium, powder coating, factory lubricated	10/bundle	6,10 meter (20')	2501003610
			CS TRACK BLACK Extruded aluminium, powder coating, factory lubricated.	10/bundle	6,10 meter (20')	2501006610
	●		CS INBOUW RAIL 6 mtr	10/bundel	mat wit mat zwart	2531011600-MAT 2531016600-MAT
●			CS/CCS/FMS TRACK CONNECTOR Used to make a solid connection between two pieces of track.	10/box	white matt white grey black matt black	2518401000-A 2518401000-A-M 2518403000-A 2518406000-A 2518406000-A-M
	●		CS RECESS TRACK CONNECTOR GALVANISED SET	1/bag		2530401000
●			CS ENDCAP UNIVERSAL LONG WITH SCREW	100/box	white silver black	2516400000 2516403000 2516406000
●			CS ENDCAP UNIVERSAL SHORT WITH SCREW	100/box	white grey black	2516401001 2516403001 2516406001
	●		CS RECESS END CAP LONG Metal, powder coated	1/ doos	mat wit mat zwart	2536401000-MAT 2536406000-MAT
	●		CS RECESS END CAP SHORT Metal, powder coated	1/ doos	mat wit mat zwart	2536401001-MAT 2536406001-MAT
●			CS / CS RECESS / CCS AS CARRIER Clickable, offset, constructed of UV-resistant plastic. 10 Carriers on a break-away strip. Can be clicked in after.	250/box	white grey black	2510101000 2510103000 2510106000
●			CS STOPCARRIER Clickable	100/box	white	2510201000
●			CS / CCS CARRIER AS WITH HOOK Clickable	100/box	white	2510501000
●			CS ECONOMY SLIDE Can turn in the track.	500/box 500/box	white black	2510601000 2510606000
●			CS BALL BEARING CARRIER 16MM SMALL	100/box	white black	2512000016 2512006016
●			CONTRACT ROLLER CARRIER For a silent and smoothly operation with heavier curtains, also for CS Recess. Designed for use with butterfly pleats.	100/box	white black	4831001000 4831006000
●			CS UNDERLAP CARRIER R/L	25/box	white	2514600000
●			CS OVERLAP CARRIER R/L	25/box	white	2514700000




CS	CS RECESS	ARTICLE	PACKING UNIT		ART.NR
●		 CS MASTER CARRIER BASE R/L WHITE	25/box	white	4814500000
●		 PROLONGED OVERLAP ARM 150MM R/L for click-on stiffener	15/box	white	9500001010
●		 STIFFNER "CLICK-ON"	15/box		5116001001
●		 Z-ARM UNIVERSAL 175MM R/L Ideal for blackout	15/box	white black	9500001030 9500006030
●		 FMS EASYFLEX CURVED ARM R/L WHITE	15/box	white black	5135901020 5135906020
●		 MTS SUSPENSION CEILING BRACKET Length: 10 cm (4") - 100 cm (40") Complete with MTS Insert Screw and MTS Top Piece	1/each	white	4518201000
		MTS SUSPENSION CEILING BRACKET 1,50 MTR WHITE Length: 100 cm (40") - 150 cm (59") Complete with MTS insert screw and MTS Top Piece	1/each	white black	4518201500 4518206150
		MTS SUSPENSION CEILING BRACKET 2,00 MTR WHITE Length: 200 cm (78") Complete with MTS insert screw and MTS Top Piece	1/each	white	4518202000
●		 SUSPENSION BRACKET CLIP FOR KS For CS, to be used in combination with the MTS Suspension Ceiling Bracket.	50/box	white black	1016901000 1016906000
●		 SMART KLICK CEILING BRACKET INCL COVER CAP "Klicks" onto track, powder coated.	100/box	white grey black	1018201001 1018203001 1018206001
●		 FALSE CEILING BRACKET (METAL) For installation on to a suspended ceiling. The track can be fixed in any angle.	25/box	white black	4519001000 4519006000
●		 SMART KLICK CEILING BRACKET DOUBLE LONG Distance between two tracks: 90 mm (3,5")  SMART KLICK CEILING BRACKET DOUBLE SHORT	30/box	white black	1018601000 1018606000  1018611000
●		 KS ADJUSTABLE WALL BRACKET, SINGLE 7,5 - 11,5 cm	100/box	white grey	1020801115 1020803115
●		 KS ADJUSTABLE WALL BRACKET, DOUBLE 6,5 - 19,5 cm	50/box	white	1020801195

CS	CS RECESS	ARTICLE	PACKING UNIT		ART.NR
●			ALUMINIUM WALL BRACKET 7.5 cm single (3') Maximum load: 25 kg/mtr.	20/box white grey black	1020301075 1020303075 1020306075
			ALUMINIUM WALL BRACKET 10 cm single (4') Maximum load: 20 kg/mtr.	20/box white grey black	1020301100 1020303100 1020306100
			ALUMINIUM WALL BRACKET 15 cm double (6') Maximum load: 13 kg/mtr.	15/box white grey black	1020301150 1020303150 1020306150
			ALUMINIUM WALL BRACKET 20 cm double (8') Maximum load: 9 kg/mtr.	15/box white grey black	1020301200 1020303200 1020306200
			ALUMINIUM WALL BRACKET 25 cm triple (10') Maximum load: 5 kg/mtr.	15/box white grey black	1020301250 1020303250 1020306250
●			COVER CAP FOR SMART KLIK ALUMINIUM WALL BRACKET	50/box white grey black	1021301000 1021303000 1021306000
●			FLICKSTICK FIBERGLASS	50/box 92 cm 122 cm 152 cm	1065101092 1065101122 1065101152
			FLICKSTICK TRANSPARENT	50/box 92 cm 122 cm 152 cm	1065102092 1065102122 1065102152
			FLICKSTICK WHITE ALUMINIUM	50/box 92 cm 122 cm 152 cm 202 cm	1065111092 1065111122 1065111152 1065111202
			FLICKSTICK SILVER ALUMINIUM	50/box 92 cm 122 cm 152 cm	1065113092 1065113122 1065113152
			FLICKSTICK BLACK ALUMINIUM	50/box 92 cm 122 cm 152 cm	1065116092 1065116122 1065116152
			FLICKSTICK ANTIQUE ALUMINIUM	50/box 92 cm 122 cm 152 cm	1065119092 1065119122 1065119152
●			VELCRO HOTEL PROFILE Inside frame fix, to reduce light leakage in combination with Looptape	120 mtr/bundle	3581601600
			LOOPTAPE	25 mtr/roll	3816202020
●			CONTRACT BENDING TOOL BASIC (without bending wheel)	1/each	2560000000
			CS/CCS/FMS BENDING WHEEL	1/each	2561000000
●			CS/FMS BENDING STRIPS For CS track, length: 90 cm (35,4")	1/set	8500000001
			CS/FMS BENDING STRIP FOR ELECTRIC POWERED BENDER Length 7 meter (23')	1/piece	5160100010
●			BENDING STAND Stand for contract bending tool	1/each	2560800000
●			ELECTRIC POWERED BENDER Available in 230V or 115V To create continious curves and arches minimum radius 50 cm (20")	1/each	1060500000

CS	CS RECESS	ARTICLE	PACKING UNIT	ART.NR
●		 CS/CCS BENDING WHEELS For Electric Powered Bender. Complete set of 3 wheels.	1/set	2560700000
●		voorbeeld-afbeelding  ELECTRIC POWERED RAILCUTTER 230 Volt EU	1/each	1061100000
		BLADE FOREST CUTTER NEW MODEL	1/each	1061200001
●		 FOREST LUBRICANT To lubricate components during assembly.	1/each	5109010000
	●	 MTS FLEXIBLE DUST STRIP To seal the curtain track opening of the ks recess track during finishing phase.	50 mtr/roll	4518501000
	●	 CHANNEL PROTECTOR with bit	1/set	purple 1070600000
	●	 SCREW M3 X 25MM FOR KS RECESS PROFILE STAINLESS STEEL	250/box	Forest073

CS	CS RECESS	GENERAL WAVE COMPONENTS	ARTICLE	PACKING UNIT	ART.NR
●	●		 CONTRACT EASYFOLD BASE ROLLER 60% 80MM For a silent and smoothly operation on CS, CS Recess, FMS Dual and CRS 28mm	500/roll	white black 4833001060 4833006060
			CONTRACT EASYFOLD BASE ROLLER 80% 60MM For a silent and smoothly operation on CS, CS Recess, FMS Dual and CRS 28mm		white black 4833001080 4833006080
●	●		 CONTRACT EASYWAVE ROLLER 60% 80MM For a silent and smoothly operation on CS, CS Recess, FMS Dual and CRS 28mm	500/roll	white black 4832001060 4832006060
			CONTRACT EASYWAVE ROLLER 80% 60MM For a silent and smoothly operation on CS, CS Recess, FMS Dual and CRS 28mm		white black 4832001080 4832006080
●	●		 WAVE ADJUSTABLE MASTER CARRIER For use with wave pleat curtains (Easyflex)	25/box	white black 4813001050 4813006050
●	●		 WAVE ADJUSTABLE ENDSTOP For use with wave pleat curtains (FES). Height adjustable and blocks detachable for the correct wave pleat depth	25/box	white black 4816001001 4816006001



-  Hey Google
-  Hey Siri
-  Hey Alexa

-  **DOMOTICA**  
READY
-  **APP**  
CONTROL
-  **WIRELESS**  
REMOTE
-  **CORDED**  
CONTROL
-  **MANUAL**  
CONTROL

## FOREST DESIGN Series

The DS-XL® Series is designed to create visual impact and provides superior functionality and ease of use to the end-user. Available as manual, corded or motorised operated curtain track system.

FOREST DS®  
FOREST DS-XL®  
FOREST DS-XL® Motorised  
FOREST DS-XL® LED  
FOREST DS-XL® LED Motorised

THE WORLD  
BEHIND  
YOUR  
CURTAINS



reddot winner 2021

# FOREST DS® - DESIGN SYSTEM




The DS® curtain track system is for fans of a sleek curtain track. This manually operated curtain track system fits into any stylish interior with an eye for design.

The DS® system has the same core dimension as the Klick System (KS®). This makes it possible to use all KS® assembly components (except the end caps).

The height of the track is 11 mm, and the curved elevation of the profile has an ergonomically designed extension to it so that the brackets can be mounted out of sight. Giving you a clean almost recess finish to your system when being utilised in a ceiling fix scenario.

## PRODUCT INFORMATION

- Elegant and aesthetically pleasing hand drawn track system.
- For all types of medium weight draperies (max. curtain weight 8kg per meter).
- Colours available: matt white, white, grey, anthracite, matt black, black.
- Available lengths in white: 4, 5, 6 & 7 meter (anthracite, matt white, matt black in 6 meter).
- Bendable, designer curtain track can be bent and reverse bent to a tight 10cm radius, or continuously curved using a 50cm radius.
- Matching assembly components for white, grey and black.
- Invisible ceiling brackets to fix track flush to ceiling available.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications.
- Same brackets as used with Klick System.
- Heavy duty clickable carriers - UV protected - for smooth and easy traversing.
- Especially designed for use in combination with Forest Easyfold System for wave pleat application.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Warranty: 10 years.

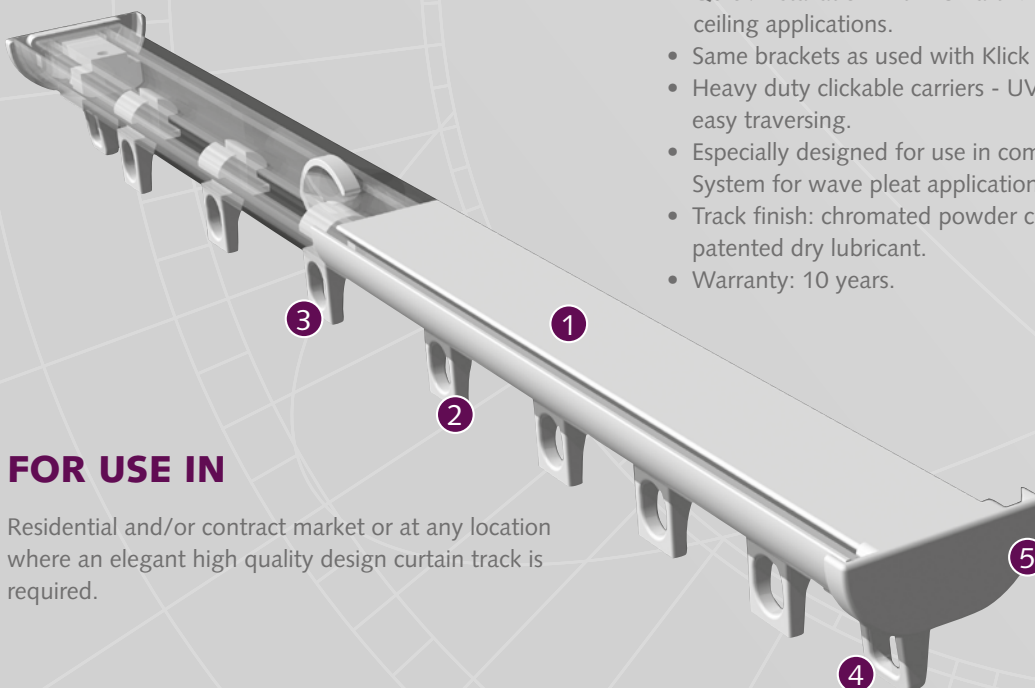

## FOR USE IN

Residential and/or contract market or at any location where an elegant high quality design curtain track is required.

- 1 DS Track
- 2 DS Carrier
- 3 DS Stop carrier
- 4 DS Twist end stop
- 5 DS End cap



## SPECIFICATIONS

- Shown actual size 1:1
- Weight: 170 gr/meter
- Aluminium Extrusion
- Size: 12 x 24 mm (0.5" x 0.9")
- Colours: white, matt-white, grey, anthracite, black, matt-black




## BENDING / CURVING

The track can be bent and reverse bent using a 10cm radius. Continuous curving is available by special order from the factory only.




## APPLICATIONS

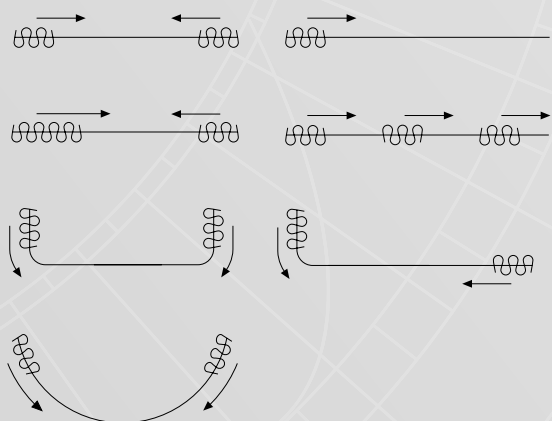

## MOUNTING


### Smart Klick Aluminium wall bracket single

- |           |           |
|-----------|-----------|
| A) 7,5 cm | B) 6,3 cm |
| A) 10 cm  | B) 8,8 cm |

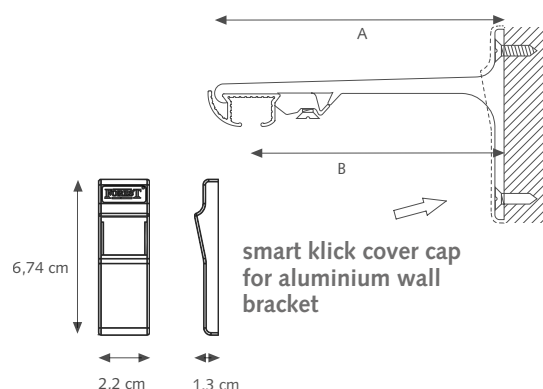



### Smart Klick Aluminium wall bracket double

- |          |           |           |
|----------|-----------|-----------|
| A) 15 cm | B) 9,2 cm | C) 4,5 cm |
| A) 20 cm | B) 9,2 cm | C) 9,5 cm |

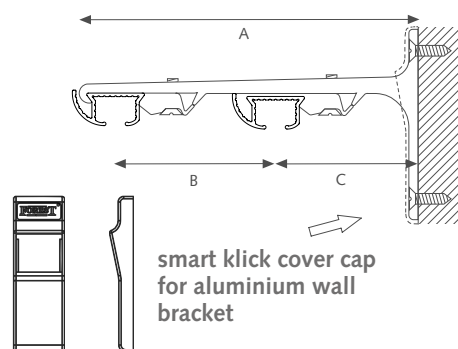

### Smart Klick Aluminium wall bracket triple

- |          |           |         |
|----------|-----------|---------|
| A) 25 cm | B) 9,3 cm | C) 5 cm |
|----------|-----------|---------|

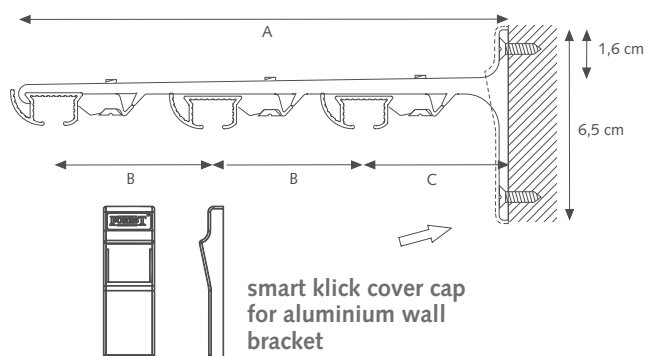

Clickable carrier



Clickable bracket

# FOREST DS-XL®



With the DS-XL® Series, Forest offers curtain tracks that optimally combines design and functionality. The Design System XL gives every interior an extra visual appearance.

Stylish curtains deserve an elegant and fashionable curtain track. The DS-XL® Series provide a sleek finish and contribute to a unique design look at home or in any hotelroom.

Thanks to a symmetrical profile, the system can be mounted "blind" to the ceiling. This provides an extra sleek finish. The track is easy to mount by means of swivel supports or click supports.

The DS-XL® track system has been especially designed for use with our wave system, Forest Easyfold System. But it is also suitable with regular pleated curtain headings.

## FOR USE IN

Hotels, offices, residences, boats, campers, planes or anywhere an efficient and elegant track system is required for curtains and drapes.


## PRODUCT INFORMATION

- Elegant and aesthetical hand drawn and corded curtain track system.
- For all types of medium weight draperies.
- Quick and easy installation.
- Ceiling brackets and wall brackets available.
- Invisible ceiling brackets to fix track flush to ceiling available.
- Heavy duty carriers - uv protected - for smooth and easy traversing.
- Colours available: white, grey or anthracite with matching assembly components.
- Available length: standard stock size 6 meter (19.8").
- Especially designed for use in combination with our wave pleat system 'Forest Easyfold System'.
- Warranty: 10 years.



## PROFILE

- Shown actual size 1:1
- Weight: 480 gr/meter
- Aluminium extrusion
- Size: 60 x 15 mm
- Colours: white, grey, anthracite

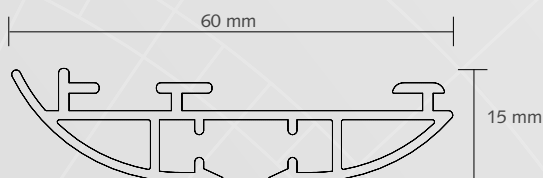

Easyflex tape application on DS-XL® track

## FOREST EASYFOLD SYSTEM

The forest wave series are an Additional feature of the drapery Hardware systems of forest group. It complies fully with the Contemporary demand for Round and fluent shapes in Decorative interiors.

It offers new possibilities for Applications in large and High spaces, such as lobbies, entrees, reception areas, conference rooms, auditoriums, meeting rooms, Food and beverage outlets etc.

The system can be installed onto all forest manual, corded (except cks) and Motorised tracks and curtain rod systems and gives a modern and special folding design to the curtain.

Such a modern curtain heading system Combined with a suitable fabric is Guaranteed to be a real eye-catcher In every room.

## EASYFLEX/EASYWAVE TOOL

With this tool you will be able to easily calculate your requirements of Easyflex carriers and Easyflex tape to obtain a beautiful folding curtain. Please scan the QR-code.



## COLOUR OPTIONS

DS-XL® is available in three colours: white, grey and anthracite.



# FOREST DS-XL® LED / Motorised



reddot winner

This unique drapery system combines a stylish design with a unique way of lighting. Many designers will work with a lighting plan with three levels: High, especially if the ceiling is vaulted or has been finished with a special material; medium, which includes wall sconces; and low, which means floor lamps and other small lights. Our DS-XL® LED is the solution for a lighting plan on a higher level, integrating our track to create an overall glow on the ceiling.

The DS-XL® LED is an elegant system for all types of medium weight draperies. Available length up to 6 meter in 2 colours: timeless white and in a stylish anthracite finish, making it suitable to fit in every design.

## Create privacy

It also offers the possibility to illuminate the backside and/or the curtain track itself enabling a higher level of privacy.

## SUSTAINABLE LIGHTING

Traditional ways of lighting are very wasteful. Most of the power is wasted in the form of heat. This is why there has been a big push to change the environmental impact of lighting. Another benefit of LED lighting is sustainability and eco-friendliness. The system doesn't use toxic chemicals and it can last for years. It has a life span of approximately 30.000 hours.

## PRODUCT INFORMATION

- Hand drawn or motorised curtain track system
- Designer track for lighting and curtain track combined.
- Colours available: white and anthracite.
- Especially designed for Forest Wave application.
- Simple electrical installation by means of clickable connectors.
- Ceiling brackets and wall brackets available.
- Supplied with 1 LED strip.
- LED Colour temperature: warm white 3000.
- Low energy consuming LED strip, eco friendly.
- Dimmable LED strips (120 LED's per meter).
- LED lifespan of 30.000 hours.
- No soldering, clickable components for easy installation without the need for an electrician.
- Power: 10 watt/mtr.
- Energy label A+.
- The DS-XL® LED Motorised system can be integrated into any building automation system.
- The DS-XL® LED motorised track system is advised to be used with a Forest Shuttle® L motor.
- Warranty: 10 years (LED-lighting 2 years).



## DS-XL® LED MOTORISED

The Forest DS-XL® Series is also available with an LED variant: the DS-XL LED. This innovative curtain rail system is not only a visual highlight in any space due to its integrated lighting but also offers ultimate ease of use. The system can be easily controlled via a remote, app, or home automation system, creating an unparalleled experience of comfort and ambiance. Additionally, you can choose between one or two LED strips for the perfect atmosphere.



## RED DOT AWARD


The DS-XL® LED Motorised track system has been awarded for the Red Dot Award 2021 for its outstanding product design. The Red Dot Award is one of the most internationally known and sought-after awards in the design industry.




reddot winner

## SPECIFICATIONS


- Shown actual size 1:1
- Size LED 61 x 20 mm  
Size LED Motorised 61 x 25 mm
- Weight LED 580 gr/meter  
Weight LED Motorised 675 gr/meter
- Aluminium extrusion

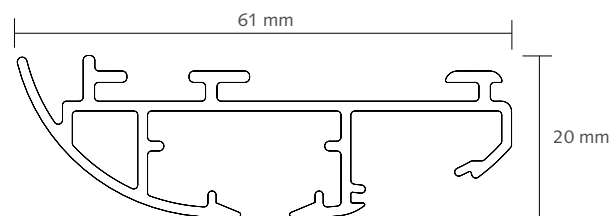


Manual  
DS-XL LED  
Colours: white & anthracite

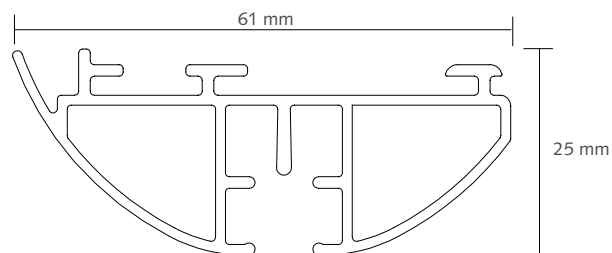

Motorised  
DS-XL  
Colours: matt white & matt black

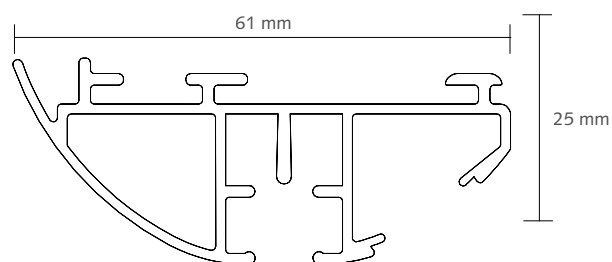

Motorised  
DS-XL LED  
Colours: white & anthracite

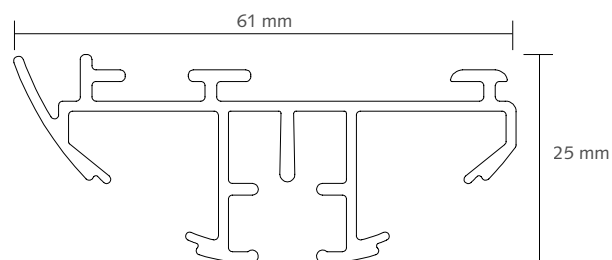

Motorised  
DS-XL Double LED  
Colours: white & matt black

# FOREST DS-XL® LED Control Options

Our wide range of controls make finding a fit for your home even easier; controlling the curtains by hand, remote or even by building automation system. With the remote you can control the curtains in any position you like. Controlling the motorised curtain system by your smartphone or tablet, you can create and schedule customised room scenes that allow your curtains to operate on their own throughout the day.



## REMOTE CONTROL

We offer two types of RF remote controls: the EasyTouch and the Diamond Sense.

- The EasyTouch controls up to 6 systems, with the option to deactivate unused channels.
- The Diamond Sense is a 15- or 2-channel remote with an LED display. Systems can be operated manually or with the integrated timer. The LED display automatically lights up when your hand moves over it.

Both remotes have a range of up to 30 meters.



## APP CONTROL VIA FOREST WIFI-DONGLE

With the Shuttle® Wi-Fi dongle, you can control your motorised curtains with your mobile device by the Forest Connect app or even by voice command with the easy integration in for example Google Home or Amazon Echo without the need for an additional hub or gateway.



Scan for more info

## APP CONTROL VIA FOREST WIRELESS CONNECTOR

The Forest Wireless Connector provides an easy solution to make Forest motorised curtains 'smart.' When combined with a smart plug, you can effortlessly control the curtains through a mobile app. Controlling the motorised curtains system by your smartphone or tablet, you can create and schedule customized room scenes that allow your curtains to operate on their own throughout the day.

If you prefer to use the Forest Connect App, you can opt for Forest's smart plug. If you wish to operate your curtains with Apple HomeKit, Amazon Alexa, or Google Assistant, you will need a compatible third-party smart plug that works with these smart home apps. This RF device can also be seamlessly integrated into the most common building management systems, including systems with dry contacts.



## BUILDING AUTOMATION / HOTEL CONTROL

The DS-XL® System can be connected to any Building Automation system, by relay control.

## SMART DEVICE CONNECTIVITY

	Shuttle S/M/L	Shuttle S/M/L with Z-Wave	Shuttle iOn	Shuttle AC	Forest Connect app	Google Home	Apple Homekit	Amazon Alexa	Google Assistant	Voice control
Forest Wireless Connector One way transmitter to control curtains by third party apps or by Domotics. (433Mhz)	●		●		● <sup>1</sup>	● <sup>1</sup>	● <sup>1</sup>	● <sup>1</sup>	● <sup>1</sup>	● <sup>1</sup>
Forest Wi-Fi Dongle in combination with Forest Connect app	●	●			●	●		●	●	●
Smartwares Controller in combination with HomeWizard lite app (433 Mhz)	●		●					●		
Homey in combination with Homey app	●	●	●			●	●	●	●	●
FIBARO System in combination with FIBARO Home Center app		●		● <sup>2</sup>		●	●	●	●	●
Samsung SmartThings Hub in combination with Samsung SmartThings app		●				●	●	●	●	●
230 Volt hard-wired building management system	● <sup>3</sup>			●						

1) In combination with a smart plug

2) Only with FIBARO Roller Shutter 3 / Walli Roller Shutter

















3) In combination with an AC Control Set


























## WORKS WITH











































\* Only works with actor.










Forest DS-XL® (LED) is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over other motorised drapery systems in the world!

DS	DS-XL	DS-XL CORDED	DS-XL MOTORISED	DS-XL LED	DS-XL LED MOTORISED	DS TRACK + COMPONENTS	ARTICLE	PACKING UNIT		ART.NR
●							DS TRACK MATT WHITE DS TRACK WHITE  DS TRACK GREY DS TRACK ANTHRACITE DS TRACK MATT BLACK	120 mtr/bundle 80 mtr/bundle 100 mtr/bundle 120 mtr/bundle 140 mtr/bundle 120 mtr/bundle 120 mtr/bundle	6 mtr 4 mtr 5 mtr 6 mtr 7 mtr 6 mtr 6 mtr	2001001600-MAT 2001001400-G 2001001500-G 2001001600-G 2001001700-G 2001003600-G 2001005600-G 2001006600-MAT
●							TRACK CONNECTOR For use of DS / KS / CKS	10/box	white grey black	1018401010 1018403010 1018406010
●							INTERNAL DS PLASTIC TRACK CONNECTOR Can be inserted in the track, but still allows the carrier to run over.	50/box	white	2018400000-G
●							CARRIER ASYMMETRICAL Clickable, UV-resistant plastic, 10 carriers on a breakaway strip. (also symmetrical carriers available).	500/box	white grey black	1010001000 1010003000 1010006000
●							CARRIER SYMMETRICAL	500/box	white	1010101000
●							STOP CARRIER Clickable, UV-resistant plastic	250/box	white grey black	2010201000 2010203000 2010206000
●							DS TWIST ENDSTOP WITH CAP UV-resistant plastic with metal plate. "Twists" into track	100/box	white grey black	2016301000 2016303000 2016306000
●							DS ENDCAP SHORT + SCREW for one-way draw curtains	100/box	white grey anthracite black	2006001000 2006003000 2006005000 2006006000
●							DS ENDCAP UNIVERSAL + SCREW	100/box	white grey anthracite black	4816101000 4816103000 4816105000 4816106000
●							CEILING BRACKET Slides onto the track, powder coated. Regular duty	100/box	white grey black	1018001000 1018003000 1018006000
●							CEILING BRACKET WITH SLOT Slides onto the track, powder coated. Regular duty Slotted support makes fixing curtain track easier	100/box	white grey black	1018101000 1018103000 1018106000
●							SMART KLICK CEILING BRACKET Powder coated, "clicks" onto track. Attach with VK-4 mm screw.  SMART KLICK CEILING BRACKET INCL.COVER CAP  COVER CAP FOR SMART KLICK BRACKETS Suitable for Smart Klick Wall-and Ceiling bracket	100/box	white grey black  white grey anthracite black  white grey anthracite black	1018201000 1018203000 1018206000  1018201001 1018203001 1018204001 1018206001  1019201000 1019203000 1019204000 1019206000
●							FALSE CEILING BRACKET (METAL) For installation on to a suspended ceiling. The track can be fixed in any angle.	25/box	white	4519001000
●							SMART KLICK WALL BRACKET 3,5 cm Klicks onto track, powder coated. One screw attachment. For light weight use only.  SMART KLICK WALL BRACKET 6 cm Klicks onto track, powder coated. One screw attachment. For light weight use only.  SMART KLICK WALL BRACKET 7,5 cm Klicks onto track, powder coated. One screw attachment. For light weight use only.	50/box	white grey black  white grey black  white grey black	1020201035 1020203035 1020206035  1020201060 1020203060 1020206060  1020201075 1020203075 1020206075
●							ALUMINIUM SK WALL BRACKET 7,5 CM SINGLE Klicks onto track, powder coated.  ALUMINIUM SK WALL BRACKET 10 cm SINGLE Klicks onto track, powder coated.  ALUMINIUM SK WALL BRACKET 15 cm DOUBLE Klicks onto track, powder coated.  KS ALUMINIUM SK WALL BRACKET 20 cm DOUBLE Klicks onto track, powder coated.  ALUMINIUM SK WALL BRACKET 25 cm TRIPLE Klicks onto track, powder coated.	20/box  20/box  15/box  15/box  10/box	white grey black  white grey black  white grey black  white grey black	1020301075 1020303075 1020306075  1020301100 1020303100 1020306100  1020301150 1020303150 1020306150  1020301200 1020303200 1020306200  1020301250 1020303250 1020305250
●							SMART KLICK COVER CAP ALUMINIUM BRACKET UNIVERSAL	50/box	white grey black	1021301000 1021303000 1021306000

DS	DS-XL	DS-XL CORDED	DS-XL MOTORISED	DS-XL LED	DS-XL LED MOTORISED	DS-XL/ DS-XL LED/ DS-XL (LED) MOTORISED + COMPONENTS	ARTICLE	PACKING UNIT	ART.NR
	●	●				 DS-XL TRACK MANUAL/CORDED, 6 mtr DS-XL TRACK MANUAL/CORDED, 4 mtr	24mtr/ bundle	white grey anthracite white anthracite	3916101600 3916103600 3916105600 5917501400 5917506400
			●			 DS-XL TRACK MOTORISED, 6 mtr In combination with Shuttle L motor	6mtr/bundle	matt white matt black	5942001600-MAT 5942006600-MAT
				●		 DS-XL LED TRACK MANUAL	6mtr/length	white anthracite	5917501600 5917505600
					●	 DS-XL LED TRACK MOTORISED, 6 mtr. In combination with Shuttle L motor & the Shuttle M adaptor 	6mtr/length	white anthracite	5915501600 5915505600
					●	 DS-XL DOUBLE LED MOTORISED TRACK, 6 mtr. In combination with Shuttle L motor & the Shuttle M adaptor	6mtr/length	white matt black	5941001600 5941006600
	●	●	●	●	●	 ECONOMY CARRIER SMALL	500/box	white grey black	3910101000 3910103000 3910106000
●			●		●	 ENDSTOP UNIVERSAL METAL	100/box	matt white grey matt black	8880001000 8880003000 8880006000
	●	●		●		 DS-XL ENDSTOP To use in combination with adjustable wave carrier Easyflex. For center draw curtains	100/box	white grey black	3916001000 3916003000 3916006000
	●					 DS-XL ENDCAP	20/box	white grey black	3916101000 3916103000 3916106000
		●				 DS-XL ENDCAP CORDED metal	20/box	white grey anthracite	3916201001-ZA 3916203001-ZA 3916205001-ZA
				●		 DS-XL LED ENDCAP	20/box	white black	5916501000 5916506000
				●		 DS-XL LED END CAP FLAT	20/box	white black	5916501002 5916506002
	●	●	●	●	●	 DS-XL KLIKK CEILING BRACKET	100/box		3918301000
	●	●	●	●	●	 DS-XL CEILING SWIVEL BRACKET	100/box	white anthracite	3818200230 3818205230
	●	●	●	●	●	 WALL BRACKET 9 CM	5/box	white anthracite	3820001018 3820005018
	●	●	●	●	●	 WALL BRACKET EXTENSION 4 CM	10/box	white anthracite	5815201030 5815205030-PC
	●	●	●	●	●	 DS-XL TRACK CONNECTOR STRAIGHT	10/box		3916401000
	●			●		 DS-XL TRACK CONNECTOR 90°	10/box		3916401001
				●	●	 DS-XL LED STRIP 3000K/ 24V/ 10W/m 8mm width	50mtr/roll		5917503055
				●	●	 DS-XL LED STRIP CONNECTOR CABLE FOR DIMMER, EXTENSION CABLE 35 cm / 24Vdc 35 cm / 24Vdc 200cm / 24Vdc 200cm / 24Vdc	1/piece	white black white black	5917502431-A 5917502432-A 5917502421-A 5917512422-A
				●	●	 DS-XL LED-STRIP CONNECTOR CABLE FOR ADAPTOR 200cm / 24Vdc 200cm / 24Vdc 35 cm / 24Vdc 35 cm / 24Vdc	1/piece	white black white black	5917502521 5917502522 5917502531 5917502532
				●	●	 DS-XL LED RF DIMMER In combination with Shuttle M adaptor To control LED light via Forest remote/wall switch	1/box	white black	5917531470 5917536470
				●	●	 DS-XL LED WIFI DIMMER In combination with Shuttle M adaptor To control LED light via Forest Connect App 	1/box	white black	5917541000 5917546000

DS	DS-XL	DS-XL CORDED	DS-XL MOTORISED	DS-XL LED	DS-XL LED MOTORISED	DS-XL/ DS-XL LED/ DS-XL (LED) MOTORISED + COMPONENTS	ARTICLE	PACKING UNIT		ART.NR
							ADAPTOR SET SHUTTLE M - FOR EU, UK AND USA (icm DS-XL LED Dimmer) Incl. cable & holder EU 0.50 mtr EU 3.00 mtr UK 0.50 mtr USA 0.50 mtr EU 0.50 mtr	1/box	white white white white black	5201002002 5201002003 5201002004 5201002007 5201006002
							ADAPTOR SET SHUTTLE M - FOR AUSTRALIA Items to be ordered separately FOREST ADAPTOR 24 VOLT DC (UNIVERSAL, EXCL CABLE) WALL BRACKET FOR POWER SUPPLY 5201002000 POWER CABLE FOR SHUTTLE L & S AUS 1.80 mtr	1/box 1/box 1/box	white	5201002000 5201002001 5201001141
							SPLITTER CABLE 1XC8/2XC7 50 CM ith the splitter cable, only one power outlet is needed to power both the Shuttle motor and the DS-XL LED RF Dimmer/DS-XL LED Wifi Dimmer	1/box	white black	5205911050 5205916050
							SWITCHING POWER SUPPLY DC EXTENSION CABLE for Shuttle S/M power supply in combination with DS-XL LED Dimmer	1/box	2 meter /white	5209002200
							DS-XL LED STRIP ANTHRACITE To cover the LED-channel when not in use	6mtr/bundle	anthracite	5916505000
							DS-XL LED STRIP MOUNTING DEVICE	1/box		5916509999
							DS-XL LED MOTORISED MOTOR PULLEY, 6 mtr plastic	1/box	white black	5917011000 5917076000
							DS-XL LED MOTORISED RETURN PULLEY, 6 mtr plastic	1/box	white black	5917011100 5917016100
							DS-XL LED MOTORISED MOTOR- AND RETURN PULLEY SET metal	1/box	white anthracite	5917011000-SET 5917015000-SET
							FMS TRANSPORT BELT Toothed belt, to be installed inside the FMS Track	100mtr/roll		5105501000
							FMS BELT CONNECTOR Connects the Master Carrier with the transport belt	50/box	white grey black	5103011500 5103013500 5103016500
							WAVE BELT CONNECTOR CENTER DRAW For use with wave pleat curtains (Easyflex) To use in combination with adjustable wave carrier	50/box	white grey black	4813001040 4813003040 4813006040
							WAVE BELT CONNECTOR ONE-WAY DRAW For use with wave pleat curtains (Easyflex) To use in combination with adjustable wave carrier	50/box	white grey black	4813001030 4813003030 4813006030
DS	DS-XL	DS-XL CORDED	DS-XL MOTORISED	DS-XL LED	DS-XL LED MOTORISED	FOREST WAVE COMPONENTS	ARTICLE	PACKING UNIT		ART.NR
							WAVE DS ENDCAP + SCREW To be screwed with an Easywave carrier, made of UV-resistant plastic for wave	 100/box	white grey black	4816101000 4816103000 4816106000
							EASYFLEX MASTER CARRIER 90 DEGREE LEFT for center draw in combination with master carrier right 90° left for small stiffener	 25/box	white grey black white	4815351090 4815353090 4815356090 4815361090
							EASYFLEX MASTER CARRIER 90 DEGREE RIGHT for center draw in combination with master carrier left 90° right for small stiffener	 15/box	white grey black white	4815451090 4815453090 4815456090 4815461090
							EASYFLEX PLASTIC MASTER CARRIER 90 DEGREE	 15/box	white black	3916701000 3916703000 3916706000
							WAVE ADJUSTABLE MASTER CARRIER For use with wave pleat curtains (Easyflex). Height adjustable and blocks detachable for the correct wave pleat depth.	 25/box	white black	4813001050 4813006050
							WAVE ADJUSTABLE ENDSTOP For use with wave pleat curtains (FES). Height adjustable and blocks detachable for the correct wave pleat depth. For DS-XL (LED) motorised, only suitable with a metal return pulley.	 25/box	white black	4816001001 4816006001
							WAVE ADJUSTABLE HOOK FOR MOTOR For use with wave pleat curtains (Easyflex). For DS-XL (LED) motorised, only suitable with a metal return pulley.	 25/box	white black	4813001010 4813006010

DS	DS-XL	DS-XL CORDED	DS-XL MOTORISED	DS-XL LED	DS-XL LED MOTORISED	CONTROL COMPONENTS + OTHER ITEMS	ARTICLE	PACKING UNIT	ART.NR
		●					DS-XL CORD CONNECTOR	100/box	white black 1530301000 1530306000
		●					TRAVERSE CORD - Polyester drapery cord designed for strong smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS/CCS/CRS/DS-XL Corded	250 mtr/roll	white grey black 1030401000 1030403000 1030406000
		●					TENSION PULLEY	25/box	white 1030501000
		●					CORD/CHAIN WALL MOUNT SAFETY BOX SINGLE	25/box	3645702000
		●					CORD/CHAIN WEIGHT DESIGN 110 GR WIT	10/box	white grey black 3030701000 3030703000 3030706000
			●	●	●		FOREST EASYTOUCH REMOTE CONTROL 6-channel. Equipped with the original RF protocol and Forest Link® protocol. Excl. Wall holder. Works with all Shuttle motors	1/box	matt white matt black 5201081006 5201086006
			●	●	●		FOREST EASYTOUCH WALL HOLDER Only suitable for EasyTouch remote control	1/box	transparent 5201080000
			●	●	●		FOREST DIAMOND SENSE REMOTE CONTROL Works only with original RF protocol	1/box	white black 5201091470 5201096470
			●		●		FOREST WIFI DONGLE Incl. cable. WiFi 2.4GHz. Bidirectioneel Power supply 12V DC 300mA max USB power 5V DC 1000mA max Control the curtains with Forest Connect App	1/box	white black 5201002280 5201006280
			●		●		FOREST WIRELESS CONNECTOR Incl. 15 cm USB cable. Always in combination with USB-adaptor. Can be ordered separately as Forest Wireless Connector USB-adaptor. One way transmitter to control curtains by third party apps (i.e Google/Apple /Amazon) or by Domotics	1/box	white 5201002270
			●		●		FOREST WIRELESS CONNECTOR USB-ADAPTOR	1/box	EU UK AU US 5201002271-EU 5201002271-UK 5201002272-AU 5201002274-US
			●		●		FOREST SMART PLUG WHITE The Forest Smart Plug allows App control via the Forest Connect App (the Forest Wireless Connector is required)	1/box	EU UK AU US 5201001952-EU 5201001953-UK 5201001954-AU 5201001955-US
			●		●		FOREST WIRELESS WALL SWITCH 2-channel wall switch, works with original RF protocol. Sizes: 8.5 x 8.5 x 1 cm	1/box	white 5201001480

						BENDING COMPONENTS	ARTICLE	PACKING UNIT	ART.NR
●							COMPACT BENDING HOUSE For DS / KS / CRS	1/piece	1050000000
							DS BENDING WHEEL ALL-IN incl. strips (60cm)	1/piece	2050000000
●							ELECTRIC POWERED BENDER For creating continuous curves. Minimum radius 50 cm.	1/box	230V 110V 1060500000 1060500001
●							DS BENDING WHEELS Set of 3 bending wheels for electric powered bender. Only suitable for DS track.	1/set	2060700000
●							DS T-BENDING STRIP SET ELECTRIC For DS electric powered bender, Length of 60 cm.	1/piece	7m 8500000000
●							KS/DS BENDING CASE - Box for storing all components of the compact bending tool, including accessories such as strips and bending wheels for the DS system. Dimensions: 40x30x33.5 cm. Box excludes all components.	1/piece	1050000001
●	●		●			sample image 	ELECTRIC POWERED RAILCUTTER - 230 Volt EU	1/piece	1061100000
							BLADE FOREST CUTTER NEW MODEL	1/piece	1061200001
●	●						TABLE DISPLAY KS-DS-DS-DS-XL	1/piece	9902100002



**DOMOTICS**  
READY



**APP**  
CONTROL



**WIRELESS**  
REMOTE



**CORDED**  
CONTROL

## FOREST ROMAN BLIND Series

Elegantly shaped aluminium profile with integrated Velcro Tape

FOREST BS® Manual  
FOREST BS® Motor (wired/battery powered)  
FOREST BS® MAX  
FOREST BCS®

THE WORLD  
BEHIND  
YOUR  
CURTAINS



# FOREST BLIND SYSTEM - BS®



For a more streamlined look or when space is at a premium, roman blinds that stack neatly at the top of the window when retracted are the perfect solution. With the Blind System - BS® of Forest a sleek natural look is provided for your interior. Experience the simplicity of chain operation for Roman blinds. With an easy-to-use chain mechanism, adjusting the blinds to your desired position is effortless.

The Blind System - BS® is the most widely used and recognised roman blind in the industry. It comes with integrated velcro tape so that the fabric can be easily attached & removed. The system is always correctly aligned due to the twistlock on the cord roll support. For the ultimate convenience a motorised control option is possible. Operate the Blind System at the press of a button or by your smartphone. See for more info about motorised options check further down in this brochure.

## PRODUCT INFORMATION

- Compact hand drawn roman blind system.
- For all types of light and medium weight draperies.
- Elegant shaped aluminium profile, with integrated Velcro hook tape.
- Application width: min. 38 cm & max 5.80 meter (19").
- Available height: 3.50 meter (11.5").
- Simple face-fix and top fix installation.
- Conic shaped drums; thus smooth and straight operation of the system is guaranteed.
- Control unit options:
  - 1:1 (fabric weight up to 3,5 kg)
  - 1:4 (fabric weight up to 7,5 kg)
- Total maximum fabric weight up to 7,5 kg.
- Colour available: white.
- Special Child Safety solution possible (1:4 & 1:4).
- Track finish: durable, high-quality aluminium with a powder-coated finish.
- Warranty Manual System: 10 year.

## FOR USE IN

Hotels, offices, residences, boats or anywhere an efficient Velcro track system for roman shades is required.




## CONTROL OPTIONS





## PROFILE

- Weight 409 gr/mtr
- Aluminium extrusion 6063 T5
- Size 33.3 x 36.7 mm (1.3" x 1.4")
- Colour available: white

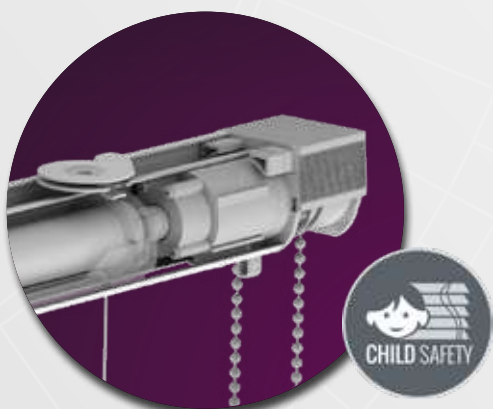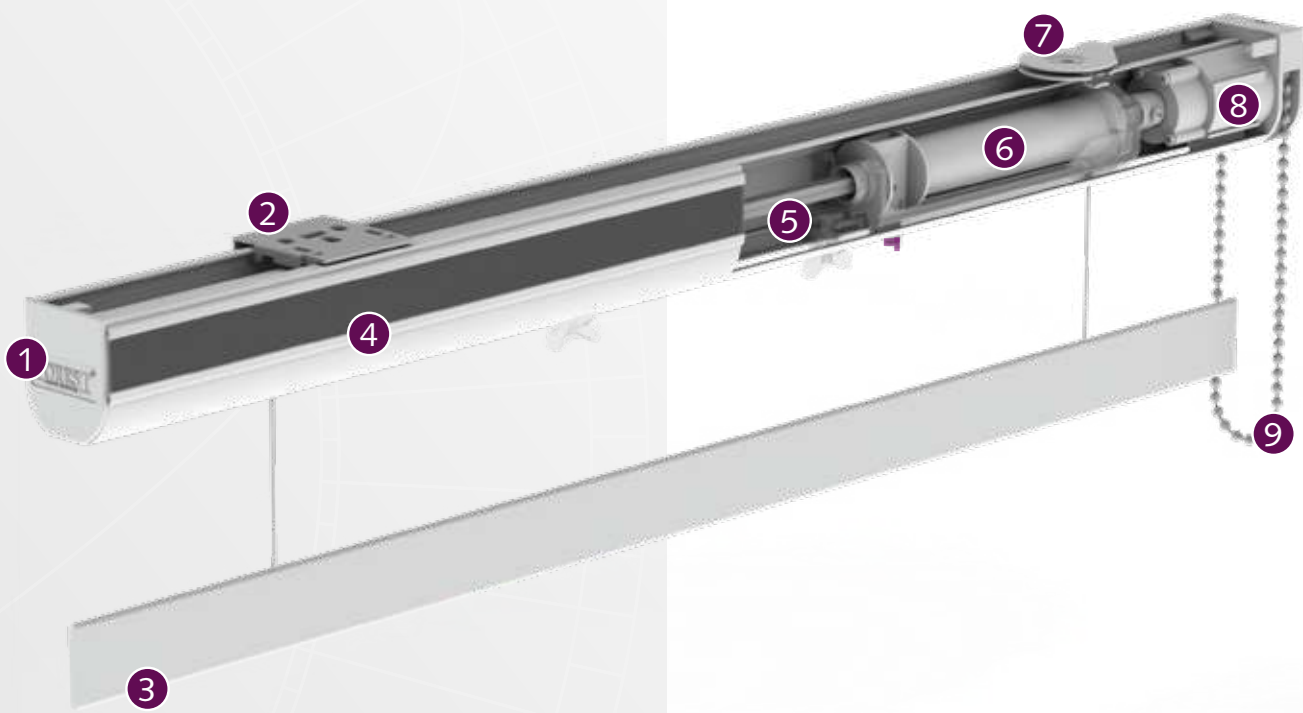

- ① BS Endcap
- ② BS Smart Klick® Ceiling / Wall Bracket
- ③ Counterweight bar 6 x 20 mm.
- ④ BS Track incl. Velcro Hook Tape
- ⑤ BS Rod 5x5mm
- ⑥ BS Quicklock Cord Roll
- ⑦ BS Ceiling bracket, swivel
- ⑧ BS Control Unit 1:4
- ⑨ Chain

# FOREST BS® MOTOR (WIRED/BATTERY)



The Blind System - BS® is the most widely used and recognised roman blind in the industry. It comes with integrated velcro tape so that the fabric can be easily attached & removed. The system is always correctly aligned due to the twistlock on the cord roll support. For the ultimate convenience a motorised control option is possible. Operate the Blind System at the press of a button or by your smartphone.

The Bluetooth capabilities of this system works with our Forest Connect App, this feature separates it from the current industry offering.

Discover the convenience and elegance of battery-powered BS® Roman blind system. Enjoy the luxury of motorised blinds without the hassle of complex wiring. Effortlessly operate them using a switch or remote control or by app, adding a touch of sophistication to your space.

## PRODUCT INFORMATION

- Dual power options; wired or battery powered.
- Motor **including Bluetooth capabilities.**
- Works directly with our Forest Connect App.
- Can be connected to the power grid with a power adapter.
- Application width: min. 53 cm (20.87") & max 5.80 meter (19').
- Available height: 3.50 meter (11.5').
- Maximum fabric weight per cord roll: 1 kg and total system 4 kg.
- Track finish: durable, high-quality aluminium with a powder-coated finish.
- Colour available: white.
- Equipped with Forest Link RF protocol.
- Charging motor takes 6-8 hours or until the blue light comes on.
- 6 month battery life (1 up & 1 down).
- 5 year warranty on motor.
- 2 Year warranty on the battery pack.

## FOR USE IN

Hotels, offices, residences, boats or anywhere an efficient motorised Velcro track system for roman shades is required.



## CONTROL OPTIONS





## PROFILE

- Weight 409 gr/mtr
- Aluminium extrusion 6063 T5
- Size 33.3 x 36.7 mm (1.3" x 1.4")
- Colour available: white

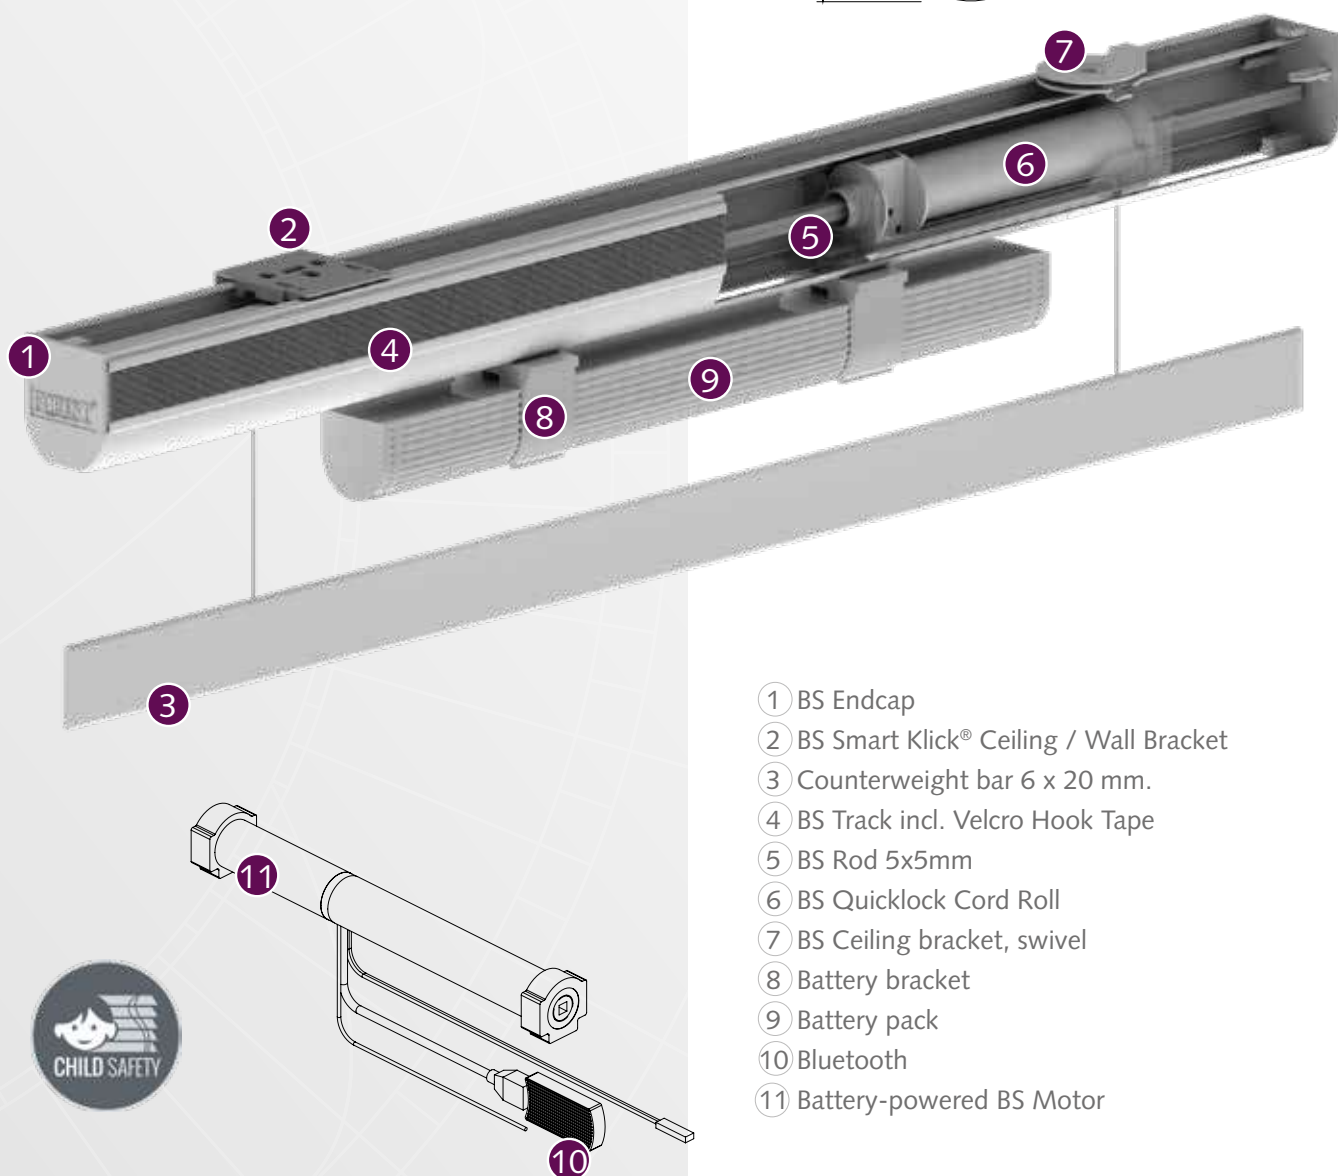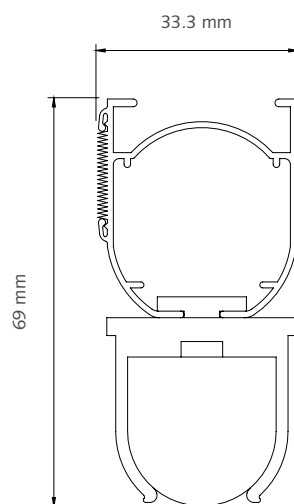

- ① BS Endcap
- ② BS Smart Klick® Ceiling / Wall Bracket
- ③ Counterweight bar 6 x 20 mm.
- ④ BS Track incl. Velcro Hook Tape
- ⑤ BS Rod 5x5mm
- ⑥ BS Quicklock Cord Roll
- ⑦ BS Ceiling bracket, swivel
- ⑧ Battery bracket
- ⑨ Battery pack
- ⑩ Bluetooth
- ⑪ Battery-powered BS Motor

# FOREST BLIND SYSTEM MAX - BS MAX®



To complement the manual range of the roman blind systems for heavier duty drapery, Forest introduces the Blind System Max®.

The Forest BS Max® is developed for taller windows and heavier fabrics. This roman blind system can go up to a height of 4.80 meter with a total weight of 13 kg. It comes with integrated velcro tape so that the fabric can be easily attached & removed.

## PRODUCT INFORMATION

- Hand drawn roman blind system.
- For all types of medium and heavy weight draperies.
- Elegant shaped aluminium profile, with integrated Velcro hook tape.
- Application width: min. 38 cm & max 5.80 meter (19").
- Available height: 4.80 meter (15,75").
- Simple face-fix and top fix installation.
- Cords are easy to remove; very useful when washing or dry cleaning the fabric.
- Self-braking endless chain control units.
- Maximum fabric weight per cord roll: 4 kg and total system 13 kg.
- Colour available: white.
- Track finish: durable, high-quality aluminium with a powder-coated finish.
- 10 year warranty

## FOR USE IN

Hotels, offices, residences, boats, campers, planes or anywhere an efficient Velcro track system for roman shades is required.



## CONTROL OPTION





## PROFILE

- Weight 694 gr/mtr
- Aluminium extrusion 6063 T5
- Size 53.2 x 53.5 mm (2.0" x 2.1")
- Colour available: white

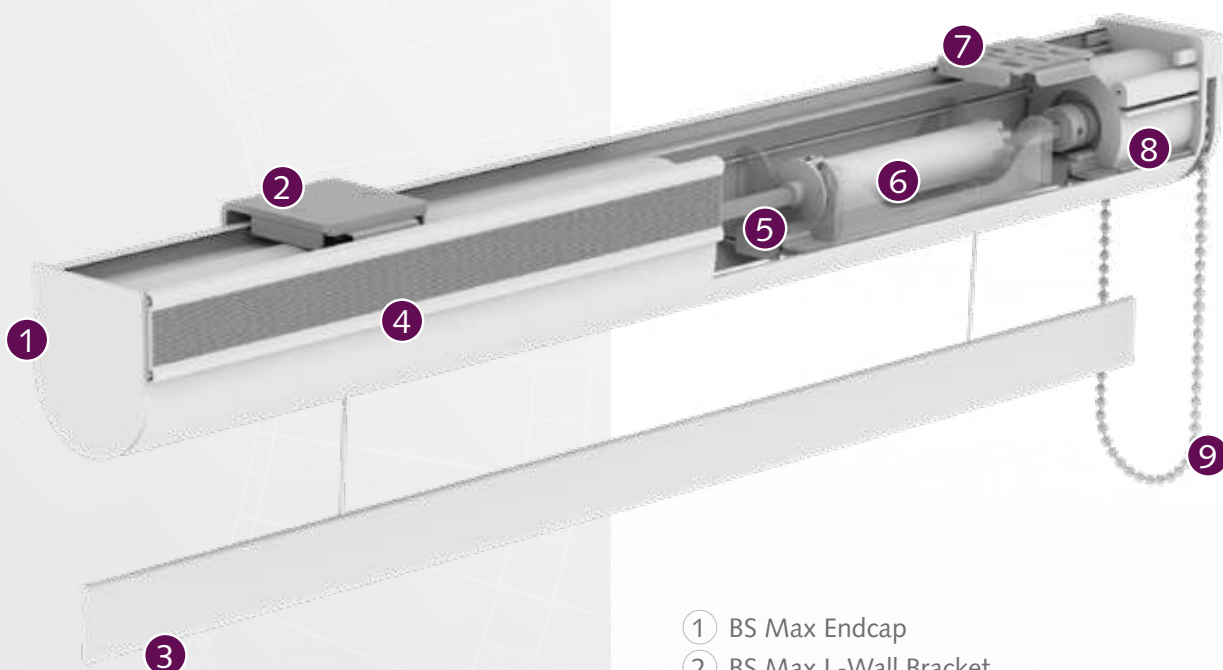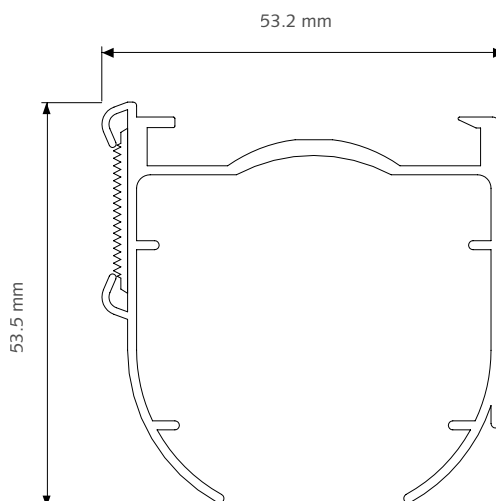

- ① BS Max Endcap
- ② BS Max L-Wall Bracket
- ③ Counterweight bar 6 x 20 mm.
- ④ BS Max Track incl. Velcro Hook Tape
- ⑤ BS Rod 5x5mm
- ⑥ BS Max Cord Drum
- ⑦ BS MaxHidden Ceiling Bracket
- ⑧ BS Max Control Unit 1:4
- ⑨ Chain

# FOREST BLIND CONTRACT SYSTEM - BCS®



Another solution of Forest is the motorised roman blind 'BCS®-system', developed especially for taller window frames and heavier fabrics. The tubular motor in the system is 220 Volt and available in variable voltages as required. A powerful 121 Watt motor is standard, capable of lifting blinds of up to 13 kg; other motor types - capable of up to 26 kg - are available upon request. The cord coils can hold 5.5 meter of cord.

The Forest roman blind BCS® system is suitable for all current control systems and incorporates a unique, patented cord braking system. If, for any reason, the roll down action of a blind is obstructed, the motor automatically trips out to prevent the blind leaning and the cord breaking.

## PRODUCT INFORMATION

- Motorised roman blind system.
- For all types of medium and heavy weight draperies.
- Elegantly shaped aluminium profile, with Velcro Hook Tape
- Available width: 5.80 meter (19").
- Application width: min. 65 cm & max 5.50 meter (18").
- Simple and quick installation with Smart Klick® bracket.
- Cords are easy to remove; very useful when you want to wash or dry cleaning the fabric.
- Can be controlled by wall switch, remote control (high frequency).
- Easy to connect to building automation systems.
- Easy to connect with third party Apps (Apple Homekit or Google Assistant) by the Forest Wireless Connector.
- Cord Drums can be placed on every position in the profile.
- Maximum fabric weight per cord roll: 4 kg.
- Tubular motor also available with internal Multi receiver and electronic limit setting.
- Track finish: durable, high-quality aluminium with a powder-coated finish.
- Warranty Manual System: 10 year.
- Warranty Motorised System: 5 year.

## FOR USE IN

Domestic and/or project market, or at any location where a high quality and smooth operated motorized blind system is requested.


## CONTROL OPTIONS





## PROFILE

- Weight 1092 gr/mtr
- Aluminium extrusion 6063 TS
- Size 63 x 74 mm (2.4" x 2.9")
- Colour available: white

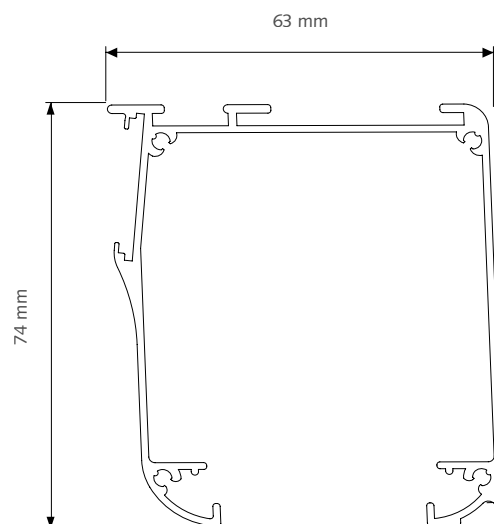

- 1 BCS Klick® Bracket with allen screw
- 2 BCS Endcap
- 3 Counterweight bar 20 x 6 mm.
- 4 BCS Velcro Hook Tape
- 5 BCS Track
- 6 BCS Tube 8-angular
- 7 BCS Cord Roll House Complete
- 8 BCS Centre Support
- 9 Forest Tubular Motor
- 10 Ceiling Swivel Bracket


# FOREST BLIND CONTRACT SYSTEM - BCS®



## SPECIFICATIONS

Type	Strength	Speed	Weightload	Noise level	Internal Receiver	Control options
6/28/S	6 Nm	28 rpm	13 kg	< 44 dB(A)	No	Home Automation / Forest Multi Receiver Wall Switch
6/20/SQ	6 Nm	20 rpm	13 kg	< 40 dB(A)	No	Home Automation / Forest Multi Receiver Wall Switch
13/14/S	13 Nm	14 rpm	26 kg	< 44 dB(A)	No	Home Automation / Forest Multi Receiver Wall Switch
6/28/E	6 Nm	28 rpm	13 kg	< 44 dB(A)	Yes	Forest Remote / Wireless Wall Switch / Forest Wireless Connector
5/20/EQ	5 Nm	20 rpm	13 kg	< 40 dB(A)	Yes	Forest Remote / Wireless Wall Switch
13/14/E	13 Nm	14 rpm	26 kg	< 44 dB(A)	Yes	Forest Remote / Wireless Wall Switch / Forest Wireless Connector

## MOUNTING

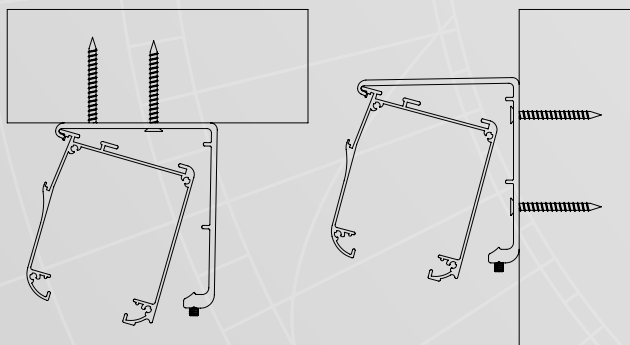


Wall and ceiling fixing is possible

## ADJUSTING MOTOR

The limit settings for the tubular motors can be done as follows:

- S motors, mechanically by means of an allen key.
- E motors, electronically by means of a Forest Remote or RF Wall Switch.





## CONTROL OPTIONS

Our wide range of controls make finding a fit for your home even easier; controlling the curtains by hand, remote or even by building automation system. With the remote you can control the roman blinds in any position you like. Controlling the motorised roman blind system by your smartphone or tablet, you can create and schedule customised room scenes that allow your roman blinds to operate on their own throughout the day.



### REMOTE CONTROL

We offer two types of RF remote controls: the EasyTouch and the Diamond Sense.

- The EasyTouch controls up to 6 systems, with the option to deactivate unused channels.
- The Diamond Sense is a 15- or 2-channel remote with an LED display. Systems can be operated manually or with the integrated timer. The LED display automatically lights up when your hand moves over it.

Both remotes have a range of up to 30 meters.



### APP CONTROL VIA FOREST WIRELESS CONNECTOR

The Forest Wireless Connector provides an easy solution to make Forest motorised roman blind systems 'smart.' When combined with a smart plug, you can effortlessly control the roman blinds through a mobile app.



Scan for more info

If you prefer to use the Forest Connect App, you can opt for Forest's smart plug. If you wish to operate your roman blinds with Apple HomeKit, Amazon Alexa, or Google Assistant, you will need a compatible third-party smart plug that works with these smart home apps. This RF device can also be seamlessly integrated into the most common building management systems, including systems with dry contacts.


The Forest Wireless Connector works only with the original RF protocol and is not compatible with the Link RF protocol.



### BUILDING AUTOMATION / HOTEL CONTROL















The BCS® System can be connected to any Building Automation system, by relay control.



















## WORKS WITH































\* Only works with actor.

Forest BCS® is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over other motorised drapery systems in the world!

BS MANUAL	BS MOTOR	BS BATTERY	BS-MAX	BCS	ARTICLE	PACKING UNIT	ART.NR
●	●	●			 BS TRACK Extruded aluminium white powder coated, with Velcro hook tape on front of the track. Available length: 5,8 mtr. (19 Ft.) 	58 mtr./bundle    white	3601001580
●					 BS CONTROL UNIT 1:1, incl. endcap Weight capacity 35 kg	100/box    white	3611001011-L
					 BS CONTROL UNIT 1:4, incl. endcap Heavy duty, Self-braking. Operation by chain. Weight capacity 7.5 kg	100/box    white	3611001014-L
●					 CHILD SAFETY CONTROL UNIT 1:1 Child safe solution, incl. endcap Weight capacity 3,5 kg 	100/box    white	3611001011
					 CHILD SAFETY CONTROL UNIT 1.4 Child safe solution, incl. endcap Weight capacity 7,5 kg	100/box    white	3611001000
●	●	●			 QUICKLOCK CORD ROLL incl. 3.5 mtr. cord (different color types cord available upon request, see for colour options BS/BCS Cord) without cord	100/box    white/transparent	3642401350  3642400000
●	●	●			 BS WALL BRACKET, SWIVEL Metal	100/box    white	3663001000
●	●				 BS CEILING BRACKET, SWIVEL	100/box    white	3661000000
●	●				 BS SMART CLICK WALL / CEILING BRACKET Metal	100/box    white	3662000000
	●	●			 BS MOTOR WITH BLUETOOTH SET Excl. Battery Pack, incl. Bluetooth Dual power options: can be cable-powered or battery-powered Features Original RF Protocol	1/set	3636000010
		●			 BS MOTOR BATTERY PACK WITH USB CABLE TYPE C (3 MTR) Incl. 2 mounting brackets for on the BS Track. Incl. USB to USB-C cable.	1/set	3636000002
	●	●			 BS BATTERY MOTOR 12V ADAPTOR PLUG (1.5 MTR) + EXTENSION (2.4 MTR) EU To be used as a charging set or for continuous power supply.	1/set    EU UK	3636000004 3636000005

BS MANUAL	BS MOTOR	BS BATTERY	BS-MAX	BCS	ARTICLE	PACKING UNIT	ART.NR
			●		 BS MAX TRACK Extruded aluminium white powder coated, with Velcro hook tape on front of the track Available length: 5,8 mtr (19 Ft.)	46,4 mtr./ bundle 	white 3710001580
			●		 BS MAX CONTROL UNIT 1:4 with endcap	50/box	white 3711001014
			●		 BS MAX CORD DRUM incl. 4,8 mtr. cord	50/box	white/transparent 3711000480
			●		 BS MAX HIDDEN CEILING BRACKET	50/box	white 3711000000
			●		 BS MAX L-WALL BRACKET	100/box	white 3711000001
●			●		 BS ROD 5X5 MM ALUMINIUM Aluminium 5 x5 mm (0,20" x 0,20") Available length: 5,8 mtr (19 Ft.)	10/bundle	3630000580
●			●	●	 FIBEROD 6 meter length 4mm diameter	600 mtr. / bundle	3535301600
				●	 BCS TRACK Extruded aluminium white powder coated Available Length 5,80 mtr (19 Ft.)	500 mtr./roll    	white 3416101000
				●	 BCS VELCRO HOOK TAPE 25 mm height. 1,20 meter length	1/box	white 3416500004
				●	 BCS TUBE 8-ANGULAR Length 5,80 mtr (19 Ft.)	1pc	white 3416102000
				●	 BCS ENDCAPS LEFT/RIGHT	25 sets/ box	white 3416201000
				●	 BCS EASY MOUNT WALL / CEILING BRACKET For wall and ceiling fixing.	25/box	white 3416301010
				●	 BCS MOUNTING BRACKET WITH ALLEN SCREW For wall and ceiling fixing.	25/box	white 3416301020-B

BS MANUAL	BS MOTOR	BS BATTERY	BS-MAX	BCS	ARTICLE	PACKING UNIT		ART.NR
				●	 CEILING SWIVEL BRACKET For ceiling fixing.	100/box	white	3818200450
				●	 BCS CENTRE SUPPORT Dimension: 51 x 56 mm.	25/box		3416500000
				●	 BCS TUBE SUPPORT 8-ANGULAR To be placed on the open end of the 8 angular tube.	25/box		3416500003
				●	 BCS CORD DRUM COMPLETE Incl. 5.5 mtr white cord.	25/box		3416500002
				●	 FOREST TUBULAR MOTOR Ø 35MM 6/28/S 13/14/S	1/box	230v/50hz 6nm/28rpm 230v/50hz 13nm/14rpm	3416600012 3416600016
				●	 FOREST SILENT TUBULAR MOTOR Ø 35MM 6/20/SQ	1/box	230v/50hz 6nm/20rpm/SQ	3416600017
				●	 FOREST TUBULAR MOTOR Ø 35MM WITH INTERNAL RECEIVER 6/28/E 13/14/E	1/box	230v/50hz 6nm/28rpm 230v/50hz 13nm/14rpm	3416600112 3416600116
				●	 FOREST LINK TUBULAR MOTOR Ø 35MM WITH INTERNAL RECEIVER 5/20/EQ	1/box	230v/50hz 5nm/20 rpm/EQ	3416700117
●			●	●	 COUNTER WEIGHT BAR 6 MTR	60 mtr./bundle 60 mtr./bundle 90 mtr./bundle 30 mtr./bundle	6 x 20 mm white 3 x 25 mm white 3 x 40 mm white 5 x 25 mm white	3501701600 3801400600 3801401600 3801402600
●			●		 ROMAN BLIND CHAIN 6 MM PITCH METAL STAINLESS STEEL Not compatible with the child safety control units	roll 1/bag	rol 150 mtr 1.50 mtr (drop=0.75 mtr) 2.00 mtr (drop=1.00 mtr) 2.50 mtr (drop=1.25 mtr) 3.00 mtr (drop=1.50 mtr) 3.50 mtr (drop=1.75 mtr) 4.00 mtr (drop=2.00 mtr) 4.50 mtr (drop=2.25 mtr)	3670008100 3670008150 3670008200 3670008250 3670008300 3670008350 3670008400 3670008450
●			●		 ROMAN BLIND CHAIN 6 MM PITCH METAL Not compatible with the child safety control units	roll 1/bag	rol 150 mtr 1.50 mtr (drop=0.75 mtr) 2.00 mtr (drop=1.00 mtr) 2.50 mtr (drop=1.25 mtr) 3.00 mtr (drop=1.50 mtr) 3.50 mtr (drop=1.75 mtr) 4.00 mtr (drop=2.00 mtr) 4.50 mtr (drop=2.25 mtr) 5.00 mtr (drop=2.50 mtr) 6.00 mtr (drop=3.00 mtr)	3670003100 3670007150 3670007200 3670007250 3670007300 3670007350 3670007400 3670007450 3670007500 3670007600
●			●		 ROMAN BLIND CHAIN 6 MM PITCH METAL MATT BLACK Not compatible with the child safety control units	roll	1.00 mtr	3670006100
●			●		 BS ENDLESS CHAIN 6 MM PITCH WHITE Compatible with the child safety control units	1/bag	1.00 mtr (drop=0,50 mtr) 1.50 mtr (drop=0.75 mtr) 2.00 mtr (drop=1.00 mtr) 2.50 mtr (drop=1.25 mtr) 3.00 mtr (drop=1.50 mtr) 3.50 mtr (drop=1.75 mtr) 4.00 mtr (drop=2.00 mtr) 4.50 mtr (drop=2.25 mtr) 5.00 mtr (drop=2.50 mtr) 6.00 mtr (drop=3.00 mtr)	3670002100 3670002150 3670002200 3670002250 3670002300 3670002350 3670002400 3670002450 3670002500 3670002600
●			●		 CHAIN JOINTING PLIER For joining two ends of the metal chain together	1/box		3675900001

BS MANUAL	BS MOTOR	BS BATTERY	BS-MAX	BCS	ARTICLE	PACKING UNIT	ART.NR
●			●		 CORD/CHAIN WALL MOUNT SAFETY BOX SINGLE	25/box	3645702000
●			●		 TENSION PULLEY	25/box white	1030501000
●			●		 CORD/CHAIN WEIGHT DESIGN	10/box white grey black	3030701000 3030703000 3030706000
●			●	●	 LOOP TAPE 20MM To be fixed onto the curtain fabric	25 mtr./roll	3816202020
●			●	●	 ROMAN BLIND CORD For use in combination with Cord Roll Support / Cord Drum. Thickness: 1.3 mm.	500 mtr/roll white (selection of 16 colours available upon request: corn, grey, off-white, brown, black, steel grey, old pink, mocca, creme, beige, blue, terra, moss, salmon, aubergine, green, pink )	3645001000
●			●	●	 SNAP CORD FIXER For easy adjustment of the bottom side of the blind	100/box transparent	3647001001
●			●	●	 SNAP CORD FIXER CHILD SAFETY	100/box transparent	3611001001
	●			●	 FOREST WIRELESS WALL SWITCH 2 channel LED Features the Original RF Protocol	1/box white	5201001480
	●			●	 FOREST MULTI RECEIVER WALL SWITCH For motor without internal receiver	1/box white	5104011500
	●			●	 FOREST EASYTOUCH REMOTE CONTROL 6-channel Features the original RF protocol & Forest Link® protocol. Excl. Wall holder	1/box matt white matt black	5201081006 5201086006
	●			●	 FOREST EASYTOUCH WALL HOLDER Only suitable for EasyTouch remote control	1/box transparent	5201080000
	●			●	 FOREST DIAMOND SENSE REMOTE CONTROL 2-15 channel with LED display Integrated timer included,original RF Protocol Incl. magnetic wall holder	1/box white black	5201091470 5201086470
	●		●	●	 FOREST WIRELESS CONNECTOR Incl.15 cm USB cable. Always in combination with USB-adapter. Can be ordered separately as Forest Wireless Connector USB-adapter.  One way transmitter to integrate system in Domotic System. To control by third apps like Google Home, Amazon Alexa or Apple Homekit use a (third-party) smart plug. Works only with original RF protocol and not with Link RF Protocol.	1/box white USB-adapter EU USB-adapter UK USB-adapter AU USB-adapter US	5201002270 5201002271-EU 5201002271-UK 5201002272-AU 5201002274-US
	●			●	 FOREST SMART PLUG WHITE The Forest Smart Plug allows App control via the Forest Connect App (the Forest Wireless Connector is required)	1/box EU UK AU US	5201001952-EU 5201001953-UK 5201001954-AU 5201001955-US

Forest Group is specialised in the development, production and supply of highly innovative curtain tracks and window coverings. We offer different curtain track solutions especially made for the hospitality industry. Whether you choose for our motorised curtain tracks or rods, blinds or manual curtain tracks your client will experience 'the Forest Factor'. Which stands for a unique combination of smooth hanging curtains, comfortable luxury and optimal ease of use.

## THE WORLD BEHIND YOUR CURTAINS

More than thirty years ago it started with a flexible aluminium system, better known as Forest KS® system. The range was expanded at a rapid pace, always focusing on functionality and quality. The technologies conquered the world. Hotels all over the world are satisfied users of Forest systems and even iconic hotels like the Palazzo, the Venezian, both in Las Vegas and the mega hotels in Dubai were equipped with kilometers of tracks from Forest Group.

Forest Group supplies its products in more than 100 countries worldwide and has sales offices in The Netherlands, United States, China, United Arab Emirates, United Kingdom and Poland, ensuring a global availability of our products.

### Some well-known and recognised features of the Forest Group curtain track systems are:

- **High-quality standards:** We guarantee a long lifespan.
- **Comfort and silence:** Curtains open and close silently, creating a serene and comfortable environment.
- **Adds style to windows:** Always perfectly hanging curtains thanks to our systems, including motorised solutions.
- **Smart integration:** Controllable via app, voice, and home automation systems for ultimate convenience.
- **Sustainability:** We use a minimum of 75% recycled aluminium.
- **Unique warranty:** 10-year warranty.



*Curtain engineering by Forest*



**DOMOTICS  
READY**



**APP  
CONTROL**



**WIRELESS  
REMOTE**



**CORDED  
OPERATION**




**MANUAL  
OPERATION**

## FOREST DECORATIVE ROD Series

Elegant and trendy rod systems. Available as manual, chain and motorised system.

CRS®  
CRS® Deco  
CRS® Corded  
MRS® Motorised

THE WORLD  
BEHIND  
YOUR  
CURTAINS

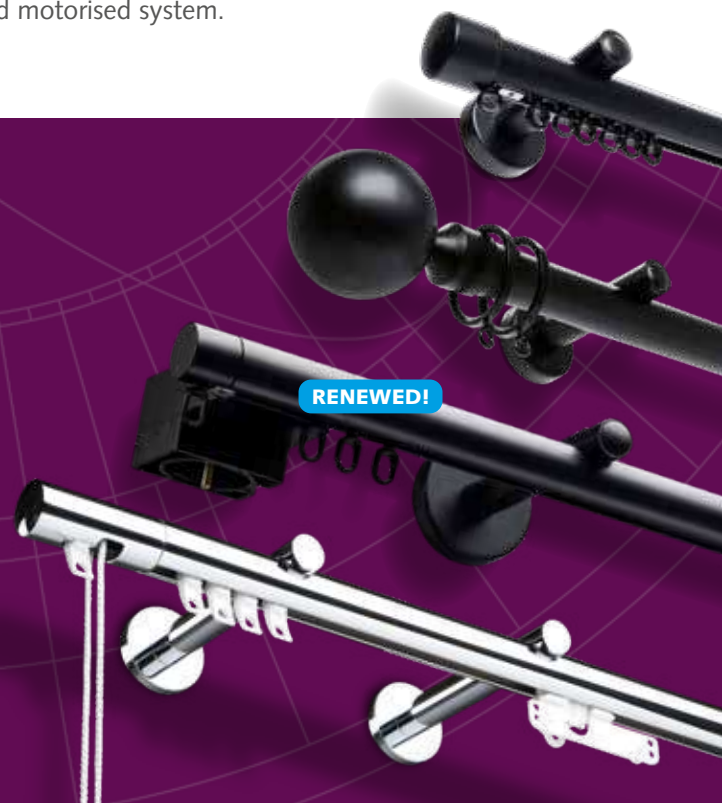

# FOREST CURTAIN ROD SYSTEM - CRS®





## PRODUCT INFORMATION

- Elegant and trendy hand drawn channel rod system
- Curtain rod fitted with curtain carriers
- Available in two dimensions: 20 mm (0,8") and 28 mm (1,1")
- Bendable, both with an inside and outside corner (except for Chrome)
- Available in 10 colours: White-pc, Anthracite-pc, Chrome, Inox-an, Stone Grey-pc, Gold-an, Bronze-an, Taupe-pc, Antique-pc and Black-pc
- The brackets and endcaps are available in matching colours
- Wide range of decorative finials offering great variety of design options
- Possibility to use without a finial for inside frame fix
- Length: 5,80 m (19")
- Rod quality: high-grade aluminium, powder coated or anodised
- Easy and quick assembly
- Forest Easyfold System (FES) for wave pleat also applicable on CRS

## PROFILE


- Shown actual size 1:1
- Aluminium Extrusion
- Weight 20 mm (0,8"): 320 gram per meter
- Weight 28 mm (1,1"): 460 gram per meter
- Dimensions: 20 mm (0,8") and 28 mm (1,1")

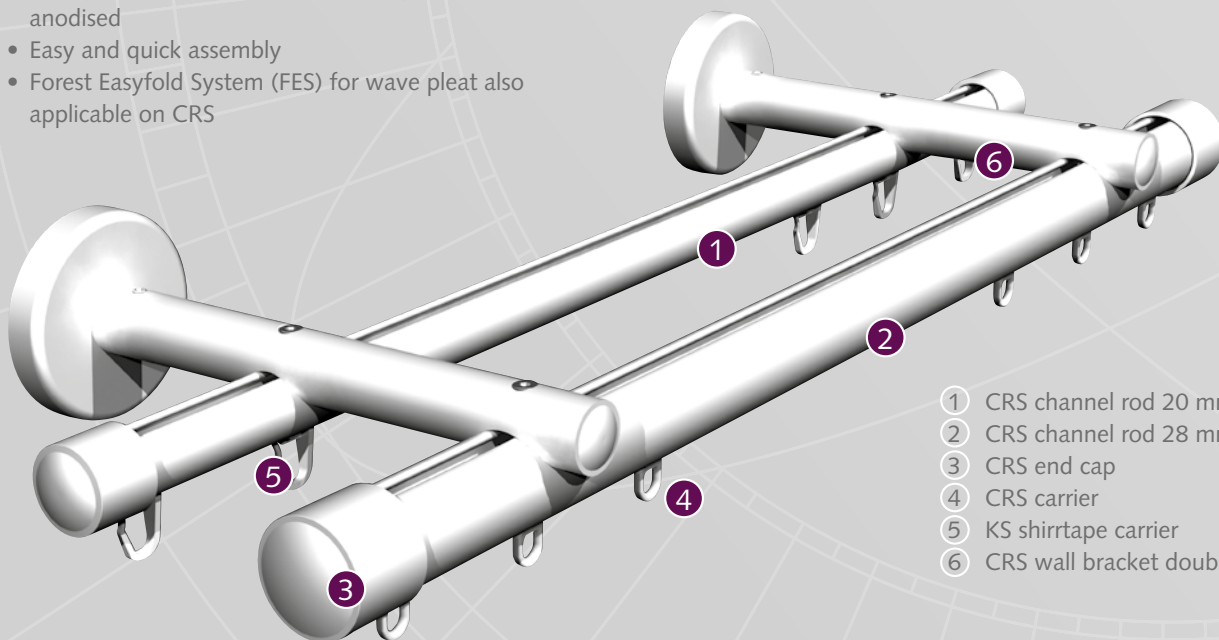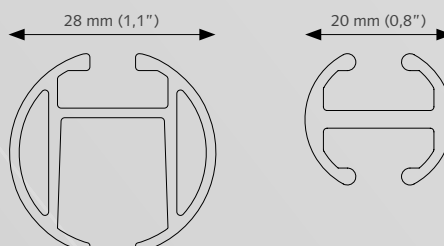

- 1 CRS channel rod 20 mm (0,8")
- 2 CRS channel rod 28 mm (1,1")
- 3 CRS end cap
- 4 CRS carrier
- 5 KS shirrtape carrier
- 6 CRS wall bracket double



## APPLICATIONS

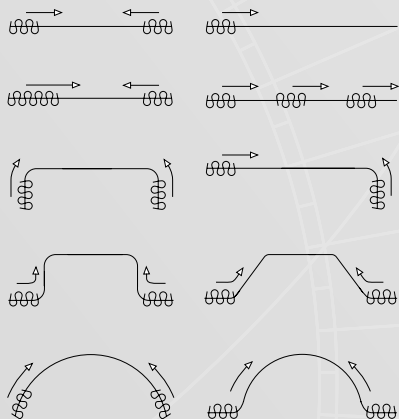

## BENDING / CURVING

The 20 mm (0,8") rod can be bent and reverse bent using a radius of 10 cm (4"); the 28 mm (1,1") rod can be bent and reverse bent by using a radius of 20 cm (8").





## FOR USE IN

Domestic and / or project market, or at any location where a high quality, elegant and manually operated channel rod system is requested.

## MOUNTING BRACKETS

### CRS Ceiling Bracket

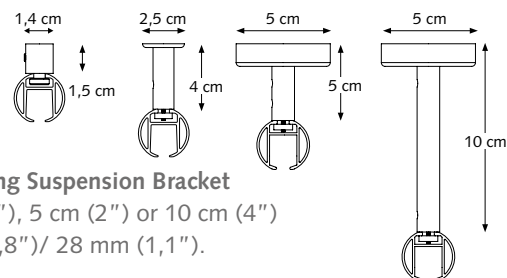


### CRS Ceiling Suspension Bracket

4 cm (1,6"), 5 cm (2") or 10 cm (4")  
20 mm (0,8") / 28 mm (1,1").


### CRS Wall Bracket, single

8 cm (3,1") Ø 20 (0,8") or 28 mm (1,1").  
12 cm (4,7") Ø 20 (0,8") or 28 mm (1,1").  
16 cm (6,3") Ø 20 (0,8") or 28 mm (1,1").




### CRS Wall Bracket, double

16 cm (6,3") Ø 20 mm (0,8")  
16 cm (6,3") Ø 28 mm (1,1")

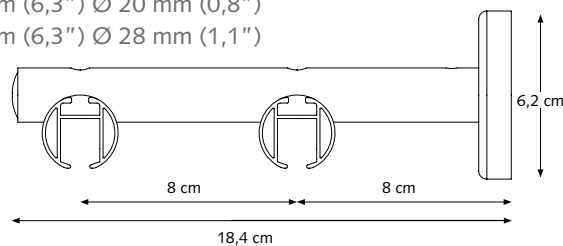


### CRS Wall Bracket, double

16 cm (6,3") Ø 20/28 mm (0,8/1,1")

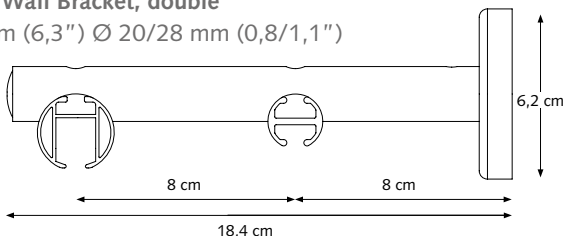

### CRS Wall Bracket, double


20 cm (7,87") Ø 28 mm (1,1")

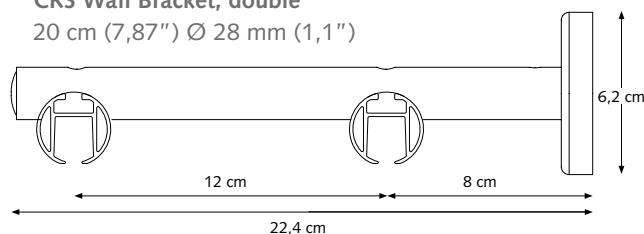

### CRS Adjustable Wall Bracket

8 cm (3,1") Ø 20 (0,8") or 28 mm (1,1"), adjustable to 9,5 cm (3,7"). A = 89 / B = 80 < 95 / C = 37,5 / D = 59,5

12 cm (4,7") Ø 20 (0,8") or 28 mm (1,1"), adjustable to 13,5 cm (5,3"). A = 129 / B = 120 < 135 / C = 37,5 / D = 59,5

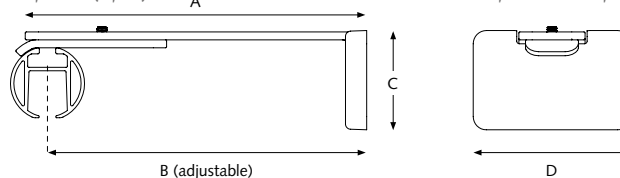

# FOREST CRS® Deco





## PRODUCT INFORMATION

- Elegant and decorative hand drawn channel rod system
- Curtain rod fitted with eyelets and rings
- Equipped with special inlay for smooth operation and noise reduction
- Available in two dimensions: 20 mm (0,8") and 28 mm (1,1")
- Available in 5 colours: Anthracite-pc, Chrome, Inox-an, Taupe-pc, Antique-pc
- The brackets and decorative endcaps are available in matching colours
- Wide range of decorative finials offering great variety of design options
- Possibility to use without a finial for inside frame fix
- Length: 5,80 m (19")
- Rod quality: high-grade aluminium, powder coated or anodised
- Easy and quick assembly
- The CRS Deco cannot be bent

## PROFILE

- Shown actual size 1:1
- Aluminium Extrusion
- Track Ø 20 mm (0,8"): Maximum 3 kilograms at a support distance of 1.5 meters.
- Track Ø 28 mm (1,1"): Up to 4 kilograms at a support distance of 2.5 meters.
- Dimensions: 20 mm (0,8") and 28 mm (1,1")

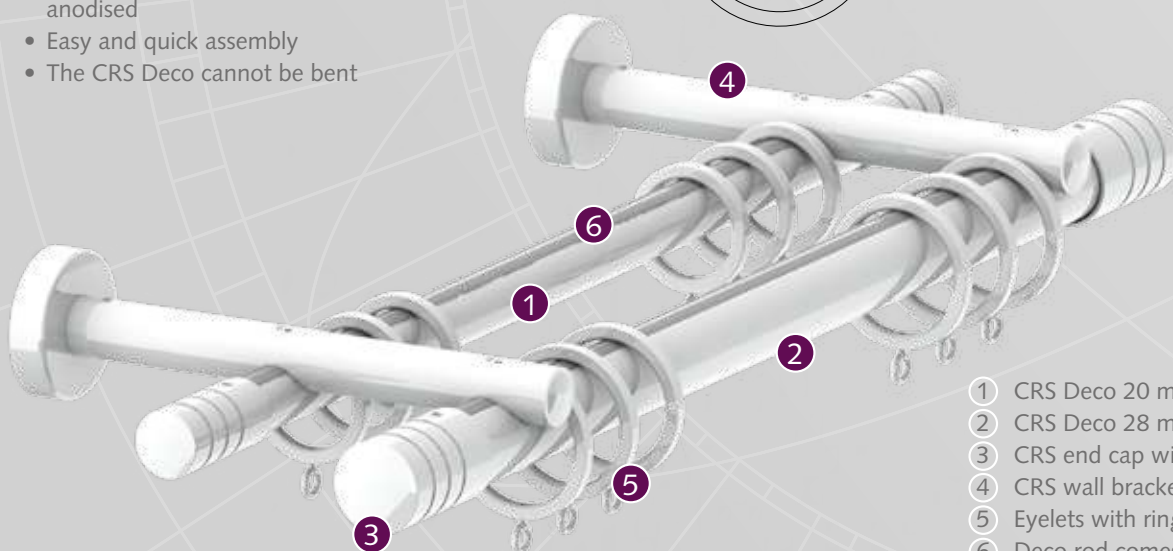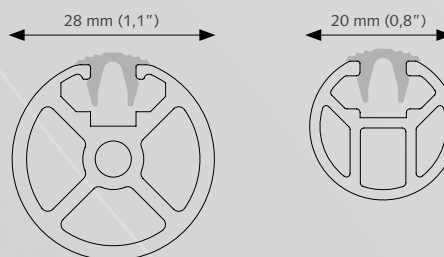

- 1 CRS Deco 20 mm (0,8")
- 2 CRS Deco 28 mm (1,1")
- 3 CRS end cap with 3 grooves
- 4 CRS wall bracket double
- 5 Eyelets with rings
- 6 Deco rod comes with a special inlay on top.



## APPLICATIONS



## SMOOTH AND SILENT OPERATION



Equipped with special inlay on top of rod for smooth operation and noise reduction.

## FOR USE IN

Domestic and / or project market, or at any location where a high quality, elegant and manually operated channel rod system is requested.

## SELECT YOUR FINIAL


Our large range of decorative finials offers you a great variety of design options. But is also possible to use without finial.



## MOUNTING BRACKETS


### CRS Ceiling Suspension Bracket

4 cm (1,6"), 5 cm (2") or 10 cm (4").  
20 mm (0,8")/ 28 mm (1,1").

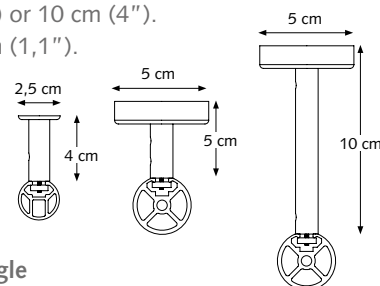


### CRS Wall Bracket, single

8 cm (3,1") Ø 20 (0,8") or 28 mm (1,1").  
12 cm (4,7") Ø 20 (0,8") or 28 mm (1,1").  
16 cm (6,3") Ø 20 (0,8") or 28 mm (1,1").




### CRS Wall Bracket, double

16 cm (6,3") Ø 20 mm (0,8")  
16 cm (6,3") Ø 28 mm (1,1")

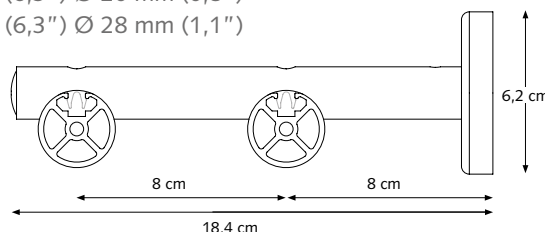


### CRS Wall Bracket, double

16 cm (6,3") Ø 20/28 mm (0,8/1,1")

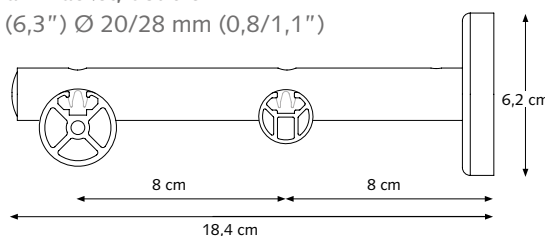

### CRS Wall Bracket, double


20 cm (7,87") Ø 28 mm (1,1")

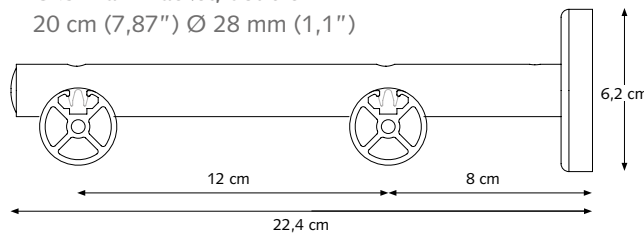

### CRS Adjustable Wall Bracket

8 cm (3,1") Ø 20 (0,8") or 28 mm (1,1"), adjustable to 9,5 cm (3,7"). A = 89 / B = 80 < 95 / C = 37,5 / D = 59,5

12 cm (4,7") Ø 20 (0,8") or 28 mm (1,1"), adjustable to 13,5 cm (5,3"). A = 129 / B = 120 < 135 / C = 37,5 / D = 59,5

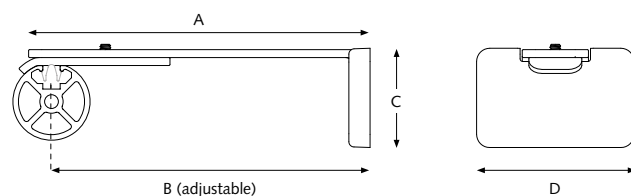

# FOREST CRS® Coded





## PRODUCT INFORMATION

- Elegant and trendy cord-operated channel rod system
- Curtain rod fitted with curtain carriers
- Available dimension: 28 mm (1,1")
- Bendable, both with an inside and outside corner (except for Chrome)
- Available in colours: White-pc, Inox-an, Stone Grey-pc, Antique-pc, Anthracite-pc, Taupe-pc, Chrome & Gold-an
- The brackets and endcaps are available in matching colours
- Wide range of decorative finials offering great variety of design options
- Length: 5,80 m (19")
- Rod quality: high-grade aluminium, powder coated or anodised
- Easy and quick assembly
- Forest Easyfold System (FES) for wave pleat also applicable on CRS Coded
- Dual cord available

## PROFILE


- Shown actual size 1:1
- Weight per meter: 8 kg and max weight load: 50 kg
- Aluminium extrusion
- Dimension: 28 mm (1,1")

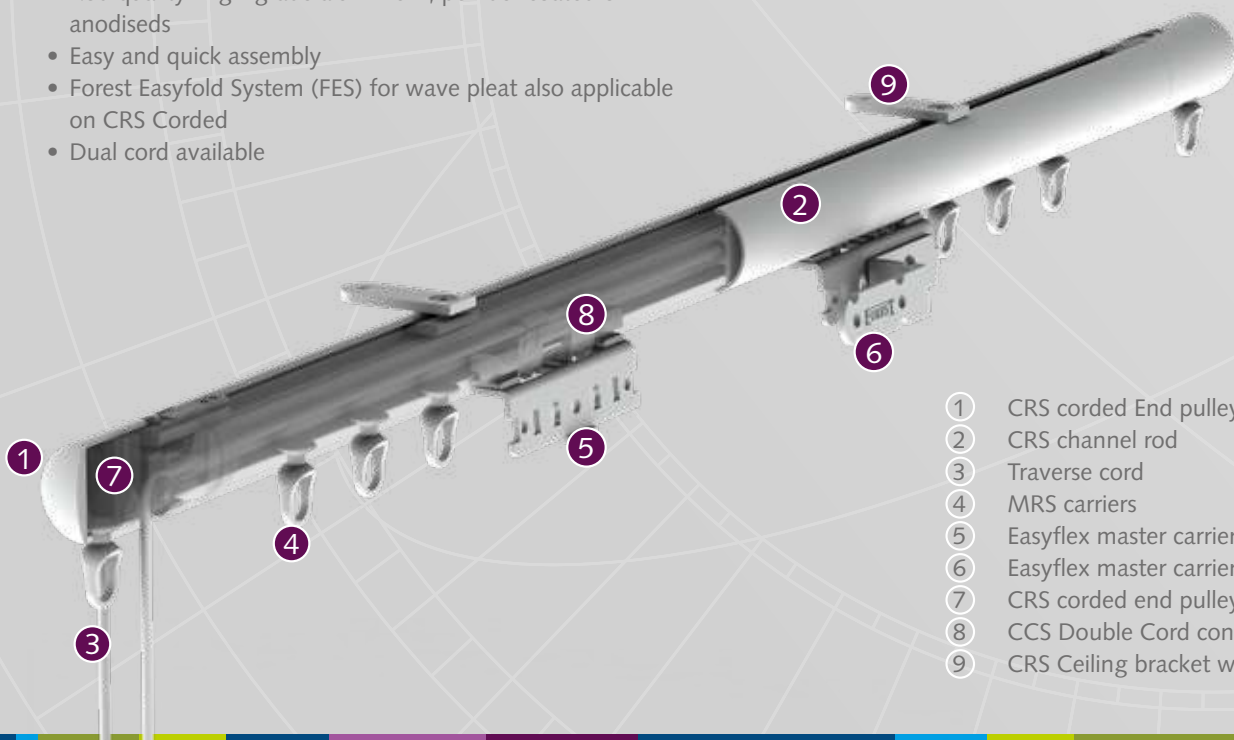

- 1 CRS coded End pulley short
- 2 CRS channel rod
- 3 Traverse cord
- 4 MRS carriers
- 5 Easyflex master carrier 90° left
- 6 Easyflex master carrier 90° right
- 7 CRS coded end pulley base
- 8 CCS Double Cord connector
- 9 CRS Ceiling bracket with hole




## APPLICATIONS



Cross-Section Channel Rod with cord connectors and carriers.

## BENDING / CURVING

The 28 mm (1,1") rod can be curved and reverse curved by using a radius of 20 cm (8").





## FOR USE IN

Domestic and / or contract market, or at any location where a high quality, elegant and corded operated channel rod system is required.

## MOUNTING BRACKETS

### CRS Ceiling Bracket

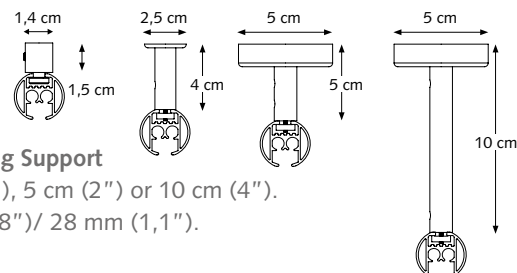


### CRS Ceiling Support

4 cm (1,6"), 5 cm (2") or 10 cm (4").  
20 mm (0,8") / 28 mm (1,1").


### CRS Wall Bracket, single

8 cm (3,1"), 12 cm (4,7") and 16 cm (6,3")  
(Base plate for the 12 cm (4,7") and 16 cm bracket is 6,2 cm (2,4"), similar to the double wall brackets.)




### CRS Wall Bracket, double

16 cm (6,3")

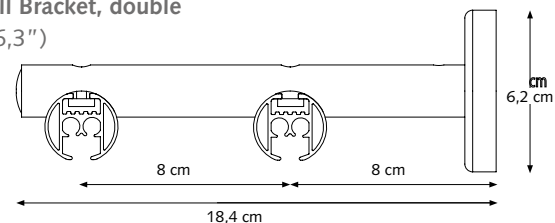


### CRS Wall Bracket, double

16 cm (6,3") Ø 20 mm (0,8") (manual) /  
28 mm (1,1") (corded)

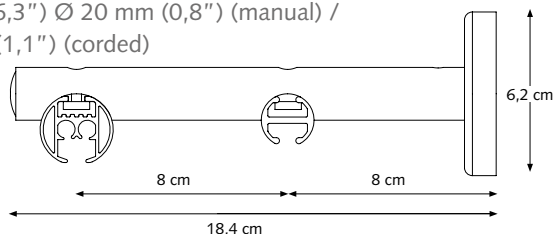

### CRS Wall Bracket, double


20 cm (7,87") Ø 28 mm (1,1")

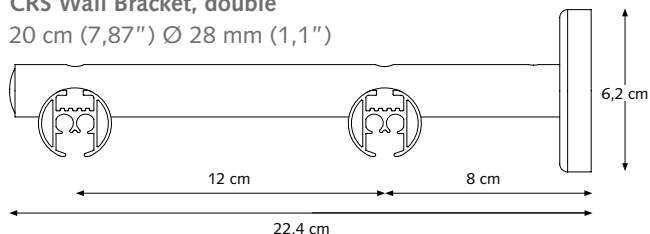

### CRS Adjustable Wall Bracket

8 cm (3,1") Ø 20 (0,8") or 28 mm (1,1"), adjustable to  
9,5 cm (3,7"). A = 89 / B = 80 < 95 / C = 37,5 / D = 59,5

12 cm (4,7") Ø 20 (0,8") or 28 mm (1,1"), adjustable to  
13,5 cm (5,3"). A = 129 / B = 120 < 135 / C = 37,5 / D = 59,5

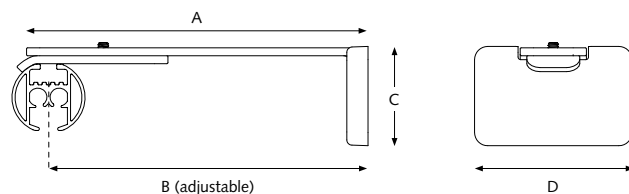

# FOREST MOTORISED ROD SYSTEM - MRS®



## PRODUCT INFORMATION

- Comfortable and luxurious motorised channel rod system
- Curtain rod fitted with curtain carriers
- Two types of motors available:
  - 24 Volt Forest Shuttle with touch impulse
  - 230 Volt FMS with 30, 45 or 60 Watt
- Available dimension: 28 mm (1,1")
- Available in 8 colours: White-pc, Anthracite-pc, Chrome\*, Inox-an, Stone Grey-pc, Gold-an, Taupe-pc, Antique-pc
- The brackets and endcaps are available in matching colours
- Wide range of decorative finials offering great variety of design options
- Length: 5,80 m (19")
- Rod quality: high-grade aluminium, powder coated or anodised
- Easy-running return pulley
- Smooth and silent operation through Kevlar reinforcement of the transport belt
- Long life-span
- New MRS has an improved motor pulley. Creates a perfectly even pleat across the motor.
- New MRS has a new return pulley that allows the curtain to travel all way to the end
- Both motor pulley and return pulley of the new MRS can be reversibly installed, left or right.
- Domotica/Building Automation Ready
- Overlap carriers guarantees a complete closing of the curtains
- Forest Wave System for wave pleat also applicable on MRS
- Unique warranty: 10 year
- The MRS cannot be bent



3




6



7

- 1 MRS channel rod
- 2 MRS end cap
- 3 MRS motor pulley equipped with high-quality ball bearings
- 4 Square Easy wave carrier
- 5 Wave adjustable master carrier
- 6 Kevlar transport belt
- 7 Easy running return pulley

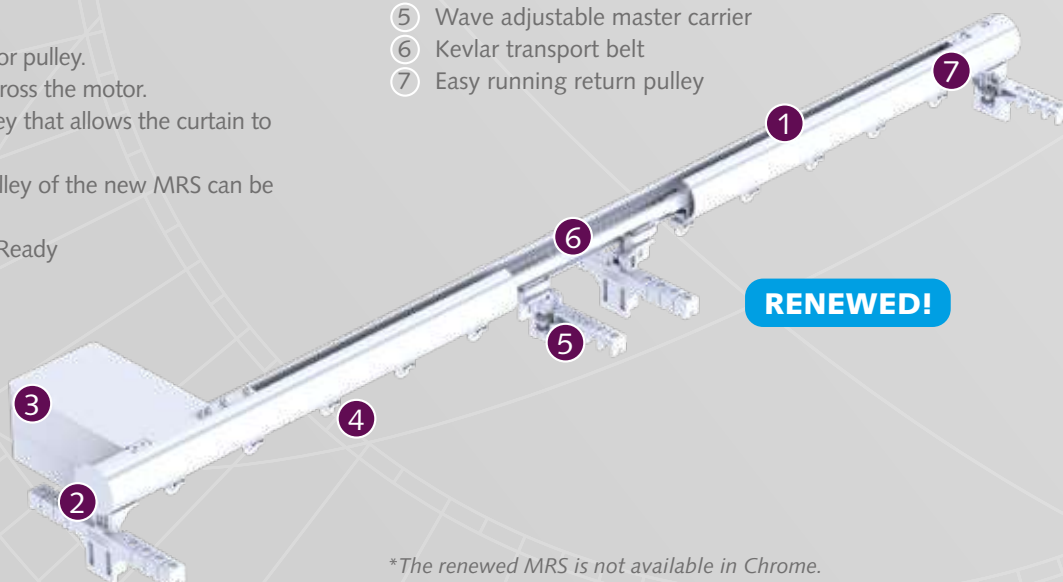


\*The renewed MRS is not available in Chrome.




## PROFILE

- Shown actual size 1:1
- Weight 480 gr/mtr
- Aluminium Extrusion
- Dimension: 28 mm (1,1")



## APPLICATIONS




## FOR USE IN

Domestic and / or contract market, or at any location where a high quality, elegant and motorised operated channel rod system is required.

## MOUNTING BRACKETS

### MRS Ceiling Bracket

Note: The pulley should be mounted 1.5 cm away from the wall to ensure there is enough space for the motor attachment.

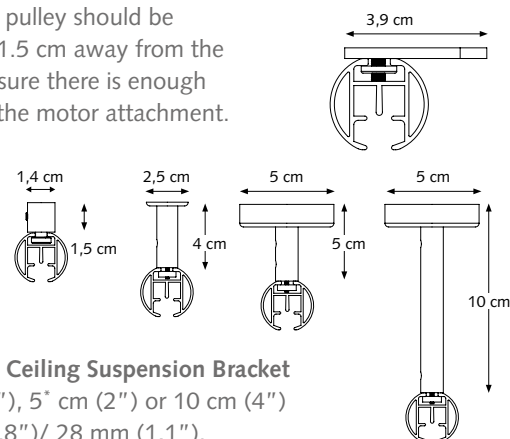

### CRS/MRS Ceiling Suspension Bracket

4 cm (1,6"), 5\* cm (2") or 10 cm (4")  
20 mm (0,8")/ 28 mm (1,1").


\*= not available in every colour

Check the product overview for colour options

### CRS/MRS Wall Bracket, single


12 cm (4,7") Ø 28 mm (1,1").

16 cm (6,3") Ø 28 mm (1,1").

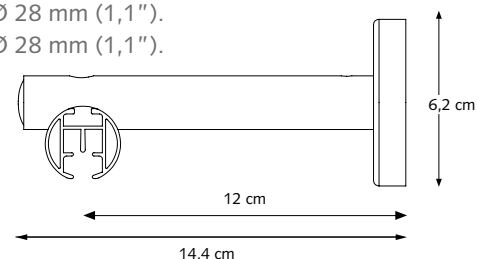


### CRS/MRS Wall Bracket, double with 4 cm wall bracket extension

16 cm (6,3") Ø 28 mm (1,1")

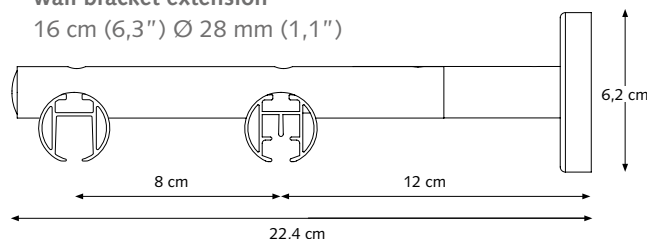

### CRS/MRS Wall Bracket, double


20 cm (7,87") Ø 28 mm (1,1")

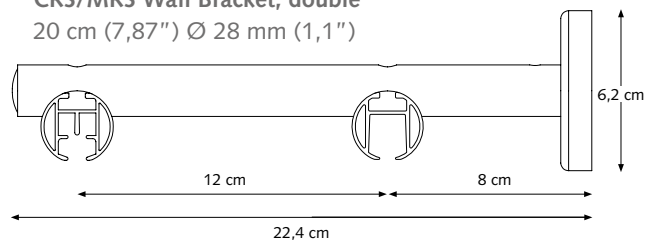

### CRS Adjustable Wall Bracket

8 cm (3,1") Ø 20 (0,8") or 28 mm (1,1"), adjustable to 9,5 cm (3,7"). A = 89 / B = 80 < 95 / C = 37,5 / D = 59,5

12 cm (4,7") Ø 20 (0,8") or 28 mm (1,1"), adjustable to 13,5 cm (5,3"). A = 129 / B = 120 < 135 / C = 37,5 / D = 59,5

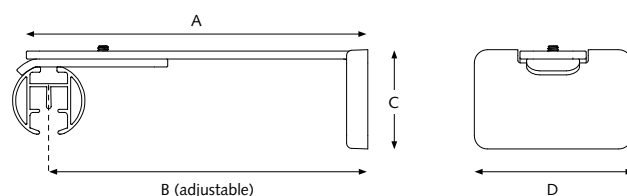

# FOREST MOTORISED ROD SYSTEM - MRS®

Our wide range of controls make finding a fit for your home even easier; controlling the curtains by hand, remote or even by building automation system. With the remote you can control the curtains in any position you like. When controlling the motorised curtain system by your smartphone or tablet, you can create and schedule customised room scenes that allow your curtains to operate on their own throughout the day.



## REMOTE CONTROL

We offer two types of RF remote controls: the EasyTouch and the Diamond Sense.

- The EasyTouch controls up to 6 systems, with the option to deactivate unused channels.
- The Diamond Sense is a 15- or 2-channel remote with an LED display. Systems can be operated manually or with the integrated timer. The LED display automatically lights up when your hand moves over it.

Both remotes have a range of up to 30 meters.



## APP CONTROL VIA FOREST WIFI-DONGLE

With the Shuttle® Wi-Fi dongle, you can control your motorised curtains with your mobile device by the Forest Connect app or even by voice command with the easy integration in for example Google Home or Amazon Echo without the need for an additional hub or gateway.

## APP CONTROL VIA FOREST WIRELESS CONNECTOR

The Forest Wireless Connector provides an easy solution to make Forest motorised curtains 'smart.' When combined with a smart plug, you can effortlessly control the curtains through a mobile app. Controlling the motorised curtains system by your smartphone or tablet, you can create and schedule customized room scenes that allow your curtains to operate on their own throughout the day.



Scan for more info

If you prefer to use the Forest Connect App, you can opt for Forest's smart plug.

If you wish to operate your curtains with Apple HomeKit, Amazon Alexa, or Google Assistant, you will need a compatible third-party smart plug that works with these smart home apps. This RF device can also be seamlessly integrated into the most common building management systems, including systems with dry contacts.

## BUILDING AUTOMATION / HOTEL CONTROL

The Forest Shuttle® can be connected to any Building Automation system, by relay control.



## SMART DEVICE CONNECTIVITY



Configure the right motorised curtain track system in a few steps.

	Shuttle S/M/L	Shuttle S/M/L with Z-Wave	Shuttle iOn	Shuttle AC	Forest Connect app	Google Home	Apple Homekit	Amazon Alexa	Google Assistant	Apple Siri	Voice control
Forest Wireless Connector One way transmitter to control curtains by third party apps or by Domotics. (433Mhz)	●		●		● <sup>1</sup>	● <sup>1</sup>	● <sup>2</sup>	● <sup>1</sup>	● <sup>1</sup>	● <sup>1</sup>	
Forest Wi-Fi Dongle in combination with Forest Connect app	●	●			●	●		●	●	●	
Smartwares Controller in combination with HomeWizard lite app (433 Mhz)	●		●					●			
Homey in combination with Homey app	●	●	●			●	●	●	●	●	
FIBARO System in combination with FIBARO Home Center app		●		● <sup>3</sup>		●	●	●	●	●	
Samsung SmartThings Hub in combination with Samsung SmartThings app		●				●	●	●	●	●	
230 Volt hard-wired building management system	● <sup>4</sup>			●							

1) In combination with Forest smart plug

2) In combination with Apple Homekit smart plug

3) Only with FIBARO Roller Shutter 3 / Walli Roller Shutter

4) In combination with an AC Control Set

## FOREST® MRS WORKS WITH


































BUSCH-JAEGER





























\* Only works with actor.




















MRS® is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over other motorised drapery systems in the world!

CRS 20 mm	CRS 28 mm	CRS DECO 20	CRS DECO 28	CRS CORDED	MRS	ARTICLE	PACKING UNIT		ART.NR
●						 CRS CHANNEL ROD Ø 20 MM (0,8") Extruded aluminium, powder coated	5.80 mtr/tube	white-pc gold-an inox-an stone grey-pc taupe-pc bronze-an black-pc antique-pc anthracite-pc chrome	5801201580-PC 5801202580 5801203580 5801203580-SG 5801204580-PC 5801204580 5801206580-PC 5801209580-PC 5801205580-PC 5801207580
	●					 CRS CHANNEL ROD Ø 28 MM (1.1") Extruded aluminium, powder coated	5.80 mtr/tube	white-pc gold-an inox-an stone grey-pc bronze-an black-pc antique-pc anthracite-pc taupe-pc chrome	5801281580-PC 5801282580 5801283580 5801283580-SG 5801284580 5801286580-PC 5801289580-PC 5801285580-PC 5801284580-PC 5801287580
		●				 CRS DECO ROD Ø 20 MM (0.8") Extruded aluminium, powder coated	5.80 mtr/tube	inox-an antique-pc taupe-pc anthracite-pc chrome	5841203580 5841209580-PC 5841204580-PC 5841205580-PC 5841207580
			●			 CRS DECO ROD Ø28 MM (1.1") Extruded aluminium, powder coated incl. inlay strip	5.80 mtr/tube	inox-an inox-pc antique-pc taupe-pc anthracite-pc chrome	5841283580 5841283580-PC 5841289580-PC 5841284580-PC 5841285580-PC 5841287580
				●		 CRS CHANNEL ROD CORDED Ø 28 MM (1.1") Extruded aluminium, powder coated incl. inlay strip	5.80 mtr/tube	white-pc gold-an inox-an stone grey-pc antique-pc taupe-pc anthracite-pc chrome	5811281580-PC 5811282580 5811283580 5811283580-SG 5811289580-PC 5811284580-PC 5811286580-PC 5701287520
					●	 MRS MOTORISED ROD Ø28 MM (1.1") Extruded aluminium, powder coated	5.80 mtr/tube	white-pc gold-an inox-an stone grey-pc antique-pc taupe-pc anthracite-pc chrome	5701281580-PC 5701282580 5701283580 5701283580-SG 5701289580-PC 5701284580-PC 5701286580-PC 5701287520
●	●			●		 CRS CARRIER ROUND	500/box	white grey black	5810101000 5810103000 5810106000
					●	 MRS CARRIER ROUND	500/box	white grey black	5710101000 5710103000 5710106000
	●					 CS BALL BEARING (SMALL) carrier 16 mm for 28 mm CRS manual	100/box	white black	2512000016 2512006016
	●					 CONTRACT ROLLER CARRIER For a silent and smoothly operation with heavier curtains. Designed for use with butterfly pleats.	100/box	white black	4831001000 4831006000
		●				 CRS DECO CURTAIN RING FOR 20 MM	50/box	inox-an taupe-pc anthracite-pc chrome antique-pc	5841203000 5841204000-PC 5841205000-PC 5841207000 5841209000-PC
			●			 CRS DECO CURTAIN RING FOR 28 MM	50/box	inox-an taupe-pc anthracite-pc chrome antique-pc	5841283000 5841284000-PC 5841285000-PC 5841287000 5841289000-PC
●				●		 CRS METAL ENDSTOP WITH SCREW for 20 mm (0,8")	2/box		5816101000
	●			●		 CRS METAL ENDSTOP WITH SCREW for 28 mm (1.1")	100/box		5816101001
●						 CRS METAL ENDSTOP WITH SCREW-EYE for 20 mm (0,8")	100/box		5816102000
	●					 CRS METAL ENDSTOP WITH SCREW-EYE for 28 mm (1.1") long	100/box		5816102001
●						 CRS METAL ENDSTOP WITH SCREW-EYE for 20 mm (1.1") long	100/box		5816102002

CRS 20 mm	CRS 28 mm	CRS DECO 20	CRS DECO 28	CRS CORDED	MRS	ARTICLE	PACKING UNIT	ART.NR
●	●				●	 END STOP UNIVERSAL METAL	100/box white matt grey black matt	8880001000 8880003000 8880006000
●	●			●		 CRS RAIL CONNECTOR (6 CM)	25/box	5815200006
		●	●		●	 CRS DECO / MRS / FMS PLUS TRACK CONNECTOR (20/28 MM)	25/box	5815200005
●	●	●	●	●		 CRS CORNER CONNECTOR (5 CM)	10/box	5815200007
●		●				 CRS FINIAL SHORT ENDCAP Ø 20 MM	10/box white-pc gold-an inox-an taupe-pc anthracite-pc black-pc chrome antique-pc	5816101220-PC 5816102220 5816103220 5816104220-PC 5816105220-PC 5816106220-PC 5816107220 5816109220-PC
	●		●			 CRS FINIAL SHORT ENDCAP Ø 28 MM	10/box white-pc inox-an taupe-pc anthracite-pc black-pc antique-pc	5816101228-PC 5816103228 5816104228-PC 5816105228-PC 5816106228-PC 5816109228-PC
●		●				 CRS FINIAL Ø 20 MM	10/box white-pc gold-an inox-an stone grey-pc black-pc antique-pc taupe-pc anthracite-pc chrome	5816101020-PC 5816102020 5816103020 5816103020-SG 5816106020-PC 5816109020-PC 5816104020-PC 5816105020-PC 5816107020
	●		●		●	 CRS FINIAL Ø 28 MM	10/box white-pc gold-an inox-an stone grey-pc black-pc antique-pc taupe-pc anthracite-pc chrome	5816101028-PC 5816102028 5816103028 5816103028-SG 5816106028-PC 5816109028-PC 5816104028-PC 5816105028-PC 5816107028
	●		●		●	 CRS/MRS FINIAL ROUND 60 MM 28 mm	2/box white-pc gold-an inox-an black-pc antique-pc taupe-pc anthracite-pc chrome	5716101100-PC 5716102100 5716103100 5716106100-PC 5716109100-PC 5716104100-PC 5716105100-PC 5716107100
	●		●		●	 CRS/MRS FINIAL ROUND 70 MM 28 mm	2/box gold-an inox-an inox-pc antique-pc taupe-pc anthracite-pc chrome	5716102000 5716103000 5716103000-PC 5716109000-PC 5716104000-PC 5716105000-PC 5716107000
	●		●		●	 CRS FINIAL WITH 3 GROOVES 20 mm	2/box inox-an anthracite-pc chrome	5816103120 5816105120-PC 5816107220
●		●				 CRS/MRS FINIAL WITH 3 GROOVES 28 mm	2/box gold-an inox-an black-pc antique-pc taupe-pc anthracite-pc chrome	5816102128 5816103128 5816106128-PC 5816109128-PC 5816104128-PC 5816105128-PC 5816107128
				●		 CRS CORDED END PULLEY complete	2/box white-pc gold-an inox-an stone grey-pc antique-pc taupe-pc anthracite-pc	6130201001-PC 6130202001 6130203001 6130203001-SG 6130209001-PC 6130204001-PC 6130206001-PC
				●		 CRS CORDED CENTRE PULLEY complete	2/box white-pc inox-an antique-pc taupe-pc anthracite-pc	6130251001-PC 6130253001 6130259001-PC 6130254001-PC 6130256001-PC

CRS 20 mm	CRS 28 mm	CRS DECO 20	CRS DECO 28	CRS CORDED	MRS	ARTICLE	PACKING UNIT		ART.NR
●	●			●	●	 CRS CEILING BRACKET SHORT Ø 20 MM with hole	100/box	white grey black	5818001000 5818001003 5818006000
						 CRS CEILING BRACKET LONG Ø 28 MM with hole		white grey anthracite black	5818003101-LA 5818003103-LA 5818009103-LA 5818006103-LA
	●			●		 CRS SWIVEL FOR 28 MM ROD	100/box		5863001000
●	●			●	●	 CRS CEILING BRACKET 1,5 CM	4/box	white-pc inox-an stone grey-pc taupe-pc antique-pc antique-pc	5818212028-PC 5818232028 5818232028-SG 5818242028-PC 5818252028-PC 5818292028-PC
●	●	●	●	●	●	 CRS CEILING SUSPENSION BRACKET 4 CM (1.57'') Ø 20/28 mm	4/box	white-pc gold-an inox-an taupe-pc black-pc antique-pc anthracite-pc chrome	5818112000-PC 5818122000 5818132000 5818142000-PC 5818162000-PC 5818192000-PC 5818152000-PC 5818172000
●	●	●	●	●	●	 CRS CEILING SUSPENSION BRACKET 5 CM (1.96'') Ø 20/28 mm	2/box	white-pc gold-an inox-an inox-pc antique-pc	5818112028-PC 5818122028 5818132028 5818132028-PC 5818192028-PC
●	●	●	●	●	●	 CRS CEILING SUSPENSION BRACKET 10 CM (3.93'') Ø 20/28 mm	2/box	white-pc gold-an inox-an black-pc antique-pc anthracite-pc	5818012028 5818022028 5818032028 5818062028-PC 5818092028-PC 5818052028-PC
●		●				 CRS WALL BRACKET SINGLE 8 CM (3.15'') Ø 20 mm Maximum load: 20 kg/piece	2/box	white-pc gold-an inox-an stone grey-pc black-pc antique-pc anthracite-pc chrome	5820080120-PC 5820080220 5820080320 5820080320-SG 5820080620-PC 5820080920-PC 5820080520-PC 5820080720
	●		●	●		 CRS WALL BRACKET SINGLE 8 CM (3.15'') Ø 28 mm Maximum load: 20 kg/piece	2/box	white-pc gold-an inox-an stone grey-pc black-pc antique-pc taupe-pc anthracite-pc chrome	5820080128-PC 5820080228 5820080328 5820080328-SG 5820080628-PC 5820080928-PC 5820080428-PC 5820080528-PC 5820080728
●		●				 CRS WALL BRACKET SINGLE 12 CM (4.72'') Ø 20 mm Maximum load: 15 kg/piece	2/box	white-pc gold-an inox-an black-pc antique-pc anthracite-pc chrome	5820120120-PC 5820120220 5820120320 5820120620-PC 5820120920-PC 5820120520-PC 5820120720
	●		●	●	●	 CRS WALL BRACKET SINGLE 12 CM (4.72'') Ø 28 mm Maximum load: 15 kg/piece	2/box	white-pc gold-an inox-an stone grey-pc black-pc antique-pc taupe-pc anthracite-pc chrome	5820120128-PC 5820120228 5820120328 5820120328-SG 5820120628-PC 5820120928-PC 5820120428-PC 5820120528-PC 5820120728
●		●				 CRS WALL BRACKET SINGLE 16 CM (6.29'') Ø 20 mm Maximum load: 12.5 kg/piece	2/box	white-pc gold-an inox-an black-pc antique-pc	5820160120-PC 5820160220 5820160320 5820160620-PC 5820160920-PC
	●		●	●	●	 CRS WALL BRACKET SINGLE 16 CM (6.29'') Ø 28 mm Maximum load: 12.5 kg/piece	2/box	white-pc gold-an inox-an black-pc antique-pc taupe-pc anthracite-pc	5820160128-PC 5820160228 5820160328 5820160628-PC 5820160928-PC 5820160428-PC 5820160528-PC
●		●				 CRS WALL BRACKET DOUBLE 16 CM (6.29'') Ø 20 mm Maximum load: 12.5 kg/piece	2/box	white-pc gold-an inox-an stone grey-pc black-pc antique-pc chrome	5822160120-PC 5822160220 5822160320 5822160320-SG 5822160620-PC 5822160920-PC 5822160720

CRS 20 mm	CRS 28 mm	CRS DECO 20	CRS DECO 28	CRS CORDED	MRS	ARTICLE	PACKING UNIT	ART.NR
	●		●	●	●	 CRS WALL BRACKET DOUBLE 16 CM (6.29") Ø 28 mm Maximum load: 12.5 kg/piece	2/box	white-pc gold-an inox-an stone grey-pc black-pc antique-pc taupe-pc anthracite-pc 5822160128-PC 5822160228 5822160328 5822160328-SG 5822160628-PC 5822160928-PC 5822160428-PC 5822160528-PC
	●		●			 CRS WALL BRACKET DOUBLE 20 CM (7.87") Ø 28 mm Maximum load: 10 kg/piece	2/box	white-pc gold-an inox-an black-pc antique-pc taupe-pc anthracite-pc chrome 5822200128-PC 5822200228 5822200328 5822200628-PC 5822200928-PC 5822200428-PC 5822200528-PC 5822200728
●	●					 CRS WALL BRACKET DOUBLE 16 CM (6.29") Ø 20/28 mm Maximum load: 12.5 kg/piece	2/box	white-pc gold-an inox-an black-pc antique-pc 5822012028-PC 5822022028 5822032028 5822036028-PC 5822039028-PC
●	●	●	●	●	●	 CRS WALL BRACKET EXTENSION 4 CM	10/box	white-pc inox-an black-pc taupe-pc antique-pc anthracite-pc 5815201030-PC 5815203030 5815206030-PC 5815204030-PC 5815209030-PC 5815205030-PC
●	●	●	●	●	●	 CRS ADJUSTABLE BRACKET EXTENSION Adjustable 2-4 cm	10/box	white-pc gold-an inox-an taupe-pc anthracite-pc black-pc antique-pc 5815101070-PC 5815102070 5815103070 5815104070-PC 5815105070-PC 5815106070-PC 5815109070-PC
●		●				 CRS INSIDE WALL BRACKET Ø 20 MM	10/box	white-pc gold-an inox-an black-pc antique-pc 5817101020-PC 5817102020 5817103020 5817106020-PC 5817109020-PC
	●		●		●	 CRS INSIDE WALL BRACKET Ø 28 MM	10/box	white-pc gold-an inox-an black-pc antique-pc taupe-pc anthracite-pc chrome 5817101028-PC 5817102028 5817103028 5817106028-PC 5817109028-PC 5817104028-PC 5817105028-PC 5817107028
					●	 MRS MOTOR PULLEY UNIVERSAL <b>RENEWED!</b>	1/box	white-pc gold-an stone grey-pc inox-an antique-pc taupe-pc anthracite-pc 5740101000-PC 5740102000-AN 5740103000-PC 5740108000-AN 5740109000-PC 5740104000-PC 5740105000-PC
					●	 MRS MOTOR PULLEY UNIVERSAL CAP SET <b>RENEWED!</b>	1/box	white grey black 5740101010 5740103010 5740106010
					●	 MRS MOTOR PULLEY UNIVERSAL FINIAL <b>RENEWED!</b>	1/box	white-pc gold-an stone grey-pc inox-an antique-pc taupe-pc anthracite-pc 5740111000-PC 5740112000-AN 5740113000-PC 5740118000-AN 5740119000-PC 5740114000-PC 5740115000-PC
					●	 MRS MOTOR PULLEY LEFT	1/box	chrome 5730107000
					●	 MRS MOTOR PULLEY RIGHT	1/box	chrome 5730207000

CRS 20 mm	CRS 28 mm	CRS DECO 20	CRS DECO 28	CRS CORDED	MRS	ARTICLE	PACKING UNIT		ART.NR
						 MRS RETURN PULLEY UNIVERSAL <b>RENEWED!</b>	1/box	white-pc gold-an stone grey-pc inox-an antique-pc taupe-pc anthracite-pc	5740121000-PC 5740122000-AN 5740123000-PC 5740128000-AN 5740129000-PC 5740124000-PC 5740125000-PC
						 MRS RETURN PULLEY LEFT	1/box	chrome	5730117000
						 MRS RETURN PULLEY RIGHT	1/box	chrome	5730127000
						 TRAVERSE CORD Polyester drapery cord designed for strong smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS/CCS/CRS/DS-XL Corded	250 mtr/roll	white grey black	1030401000 1030403000 1030406000
						 CCS CORD CONNECTOR	100/box	white grey black	3030301000 3030303000 3030306000
						 CCS DOUBLE CORD CONNECTOR	20/box	white grey black	3030301010 3030303010 3030306010
						 ASSEMBLY TOOL FOR CKS/CCS/CRS CORD CONNECTOR	Piece		9510000027
						 CORD/CHAIN WEIGHT DESIGN	10/box	white black grey	3030701000 3030706000 3030703000
						 CKS / CCS TENSION PULLEY	25/box		1030501000
						 BS CORD / CHAIN WALL MOUNT SAFETY BOX SINGLE	25/box		3645702000
						 FMS TRANSPORT BELT	100 Mtr/ roll		5105501000
						 EASYFOLD MRS BELT CONNECTOR	25/box		4805711500
						 EASYFOLD PLASTIC MASTER UNDERLAP	25/box	white grey black transparent	4815201010 4815203010 4815206010 4815201000
						 EASYFOLD PLASTIC MASTER STRAIGHT/OVERLAP	25/box	white grey black transparent	4815101010 4815103010 4815106010 4815101000
						 CRS ADJUSTABLE WALL BRACKET 8CM INCL. COVER   12CM INCL. COVER	10/box	white-pc stone grey-pc taupe-pc anthracite-pc antique-pc white-pc stone grey-pc taupe-pc anthracite-pc antique-pc	5830001080 5830003080-SG 5830004080 5830005080 5830009080 5830001120 5830003120-SG 5830004120 5830005120 5830009120
						 WAVE ADJUSTABLE MASTER CARRIER For use with wave pleat curtains (Easyflex)	25/box	white black	4813001050 4813006050
						 WAVE ADJUSTABLE ENDSTOP For use with wave pleat curtains (FES). Height adjustable and blocks detachable for the correct wave pleat depth	25/box	white black	4816001001 4816006001
						 WAVE ADJUSTABLE HOOK FOR MOTOR For use with wave pleat curtains (Easyflex) (only suitable for MRS motor pulley left & right)	25/box	white black	4813001010 4813006010

GO TO THE FES BROCHURE FOR OTHER FES (WAVE) ITEMS, SUCH AS CARRIERS, TAPE, AND HOOKS.







**EASY  
INSTALL**



**CORDED  
CONTROL**

## FOREST CORDED Systems

Heavy duty corded curtain track systems with separate internal cord channels; preventing cord sag and eliminating cord tangle.

CKS® corded | Coded Klick System  
CCS® corded | Coded Contract System  
CRS® corded | Curtain Rod System  
DS-XL® corded | Design System XL

THE WORLD  
BEHIND  
YOUR  
CURTAINS



# FOREST CKS® corded



## PRODUCT INFORMATION

- Highly efficient cord traversing system with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications.
- Bendable; it can be bent and reverse bent by using a 10 cm (4") radius or continuous curved.
- Heavy duty clickable carriers - UV protected - for smooth and easy traversing. Offset shape for straight hanging pleats.
- Can also be used for ripplefold or accordiafold drapery systems.
- Maximum fabric weight:  $\pm 6$  kg per meter (4,5 LBS per ft.). Overall max weight, 40 kg.
- Colours available: white, grey and black.
- Available lengths: 4 meter (13'1"), 5 meter (16'4"), 6 meter (19'8"),).
- Track finish: chromated powder coated with a factory applied patented dry lubricant.
- Warranty: 10 years



Clickable carrier


25 mm  
(1")



Easy installation  
click - position - tighten

## PROFILE


- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 202 grams per meter (2.17 ounce per ft.)
- Dimensions: 14 mm x 20 mm (0,6" x 0,8").



- 1 CKS Track
- 2 KS Carrier
- 3 CKS Master Carrier Overlap
- 4 CKS Master Carrier Underlap
- 5 CKS Pulley
- 6 Ceiling bracket with endcap




## APPLICATIONS

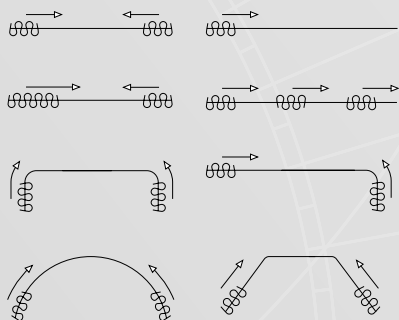

## BENDING / CURVING

The track can be bent and reverse bent using a 10 cm (4") radius. Continuous curving can easily be done using the continuous curver or the electric powered bender.




## FOR USE IN

Hotels - offices - residences - boats - campers - planes or any location where an efficient cord traversing system is required.

## MOUNTING BRACKETS

### Wall bracket

3,5 cm (1,4"),  
6 cm (2,4")




A) Min. 10 cm (4")



A) Min. 15 cm (6")



### SK Ceiling Bracket




### SK Wall bracket aluminium single

A) 7,5 cm (3")

B) 6,3 cm (2,5")

A) 10 cm (4")

B) 8,8 cm (3,5")

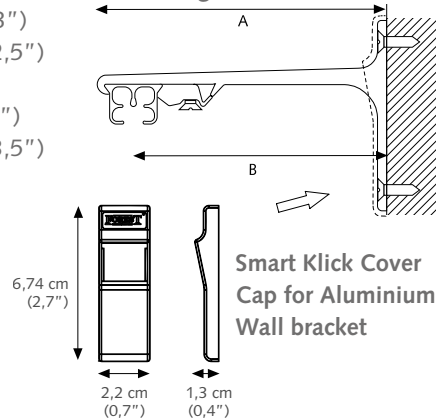

### SK Wall bracket aluminium double

A) 15 cm (6")


B) 9,2 cm (3,6")

C) 4,5 cm (1,8")

A) 20 cm (8")


B) 9,2 cm (3,6")

C) 9,5 cm (3,7")

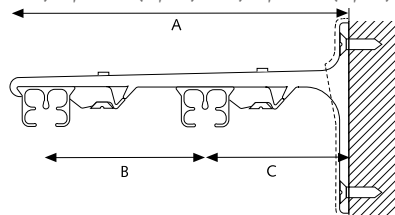

### SK Wall bracket aluminium triple

25 cm (10")

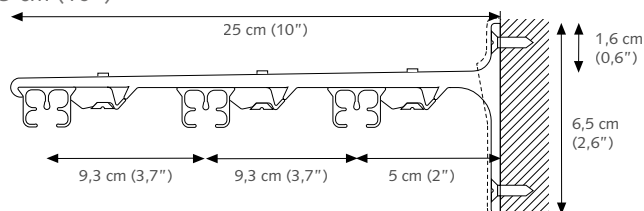

# FOREST CCS® corded



## PRODUCT INFORMATION

- Heavy duty cord operated system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick". brackets for wall and ceiling applications.
- Bendable; it can be bent and reverse bent with a 20 cm (8") radius or continuous curve.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected.
- Can also be used for Forest Easyfold and accordiafold drapery systems.
- Maximum fabric weight: 8 kg. per mtr (5,3 LBS per ft). Overall max weight, 50 kg.
- Colours available: white, grey & black.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Lengths available: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 6.10 m (20').
- Same brackets as used with Klick System.
- Warranty: 10 years.




Easy installation  
click - position - tighten



Clickable carrier

## PROFILE


- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 300 gram per mtr (3.22 ounce per ft)
- Dimensions: 20 mm x 20 mm (3/4" x 3/4")



- 1 Carrier
- 2 CCS/FMS Master Carrier Underlap
- 3 Traverse cord
- 4 CCS/FMS Master Carrier Overlap
- 5 CCS Cord connector
- 6 CCS Track
- 7 Pulley




## APPLICATIONS

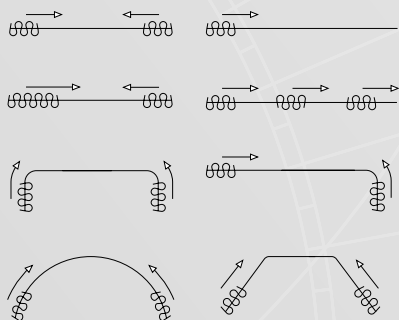

## BENDING / CURVING

The track can be bent and reverse bent using a 20 cm (8") radius. Continuous curving can be done with the electric powered bender or by special order from factory.




## FOR USE IN

Hotels - motels - offices - healthcare - schools - residential or any location where a heavy duty cord traverse system is required.

## MOUNTING BRACKETS

SK Ceiling Bracket




A) Min. 20 cm (8")



SK Aluminium Wall Bracket single

A) 7,5 cm (3") B) 6,3 cm (2,5")


A) 10 cm (4") B) 8,8 cm (3,5")

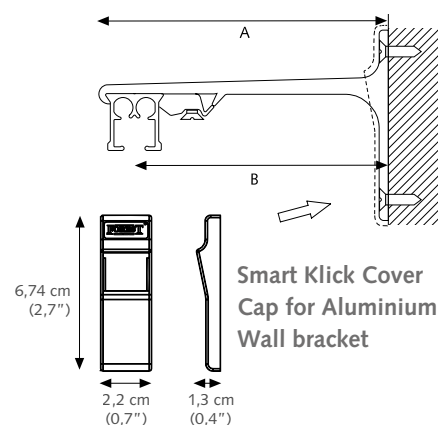

SK Wall bracket aluminium double


A) 15 cm (6") B) 9,2 cm (3,6") C) 4,5 cm (1,8")

A) 20 cm (8") B) 9,2 cm (3,6") C) 9,5 cm (3,7")

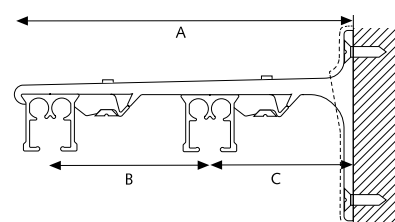

SK Wall bracket aluminium triple

25 cm (10")

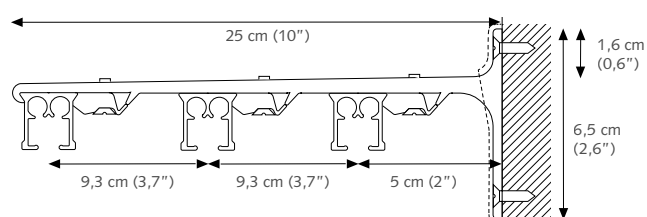

Brackets need to be placed every 50 - 60 cm (20"), depending on fabric weight.

# FOREST CRS® Coded





## PRODUCT INFORMATION

- Elegant and trendy cord-operated channel rod system
- Curtain rod fitted with curtain carriers
- Available dimension: 28 mm (1,1")
- Bendable, both with an inside and outside corner
- Available in 7 colours: White-PC, Gold-AN, Anthracite-PC, Chrome, Inox-AN, Taupe-PC, Antique-PC
- The brackets and endcaps are available in matching colours
- Wide range of decorative finials offering great variety of design options
- Length: 5,80 m (19")
- Rod quality: aluminium, chromated, powder coated or anodized
- Easy and quick assembly
- Forest Easyfold System (FES) for wave pleat also applicable on CRS Coded
- Warranty: 10 years.

## PROFILE


- Shown actual size 1:1
- Weight: 460 grammes per meter
- Aluminium extrusion
- Dimension: 28 mm (1,1")

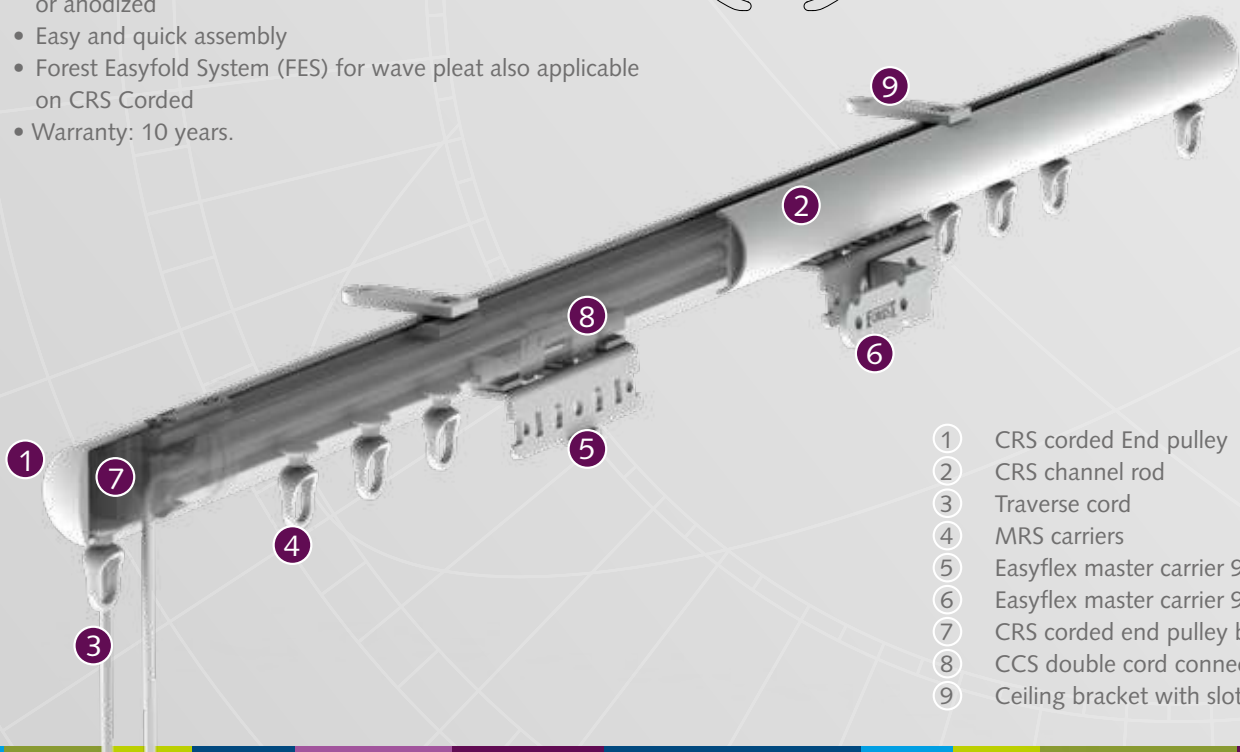

- 1 CRS coded End pulley
- 2 CRS channel rod
- 3 Traverse cord
- 4 MRS carriers
- 5 Easyflex master carrier 90° left
- 6 Easyflex master carrier 90° right
- 7 CRS coded end pulley base
- 8 CCS double cord connector
- 9 Ceiling bracket with slot




## APPLICATIONS



Cross-Section Channel Rod with cord connectors and carriers.

## BENDING / CURVING

The 28 mm (1,1") rod can be curved and reverse curved by using a radius of 20 cm (8").




## FOR USE IN

Domestic and / or contract market, or at any location where a high quality, elegant and corded operated channel rod system is required.

## MOUNTING BRACKETS


### CRS Ceiling Bracket



### CRS Ceiling Support

4 cm (1,6"), 5 cm (2") or 10 cm (4").


20 mm (0,8") / 28 mm (1,1").

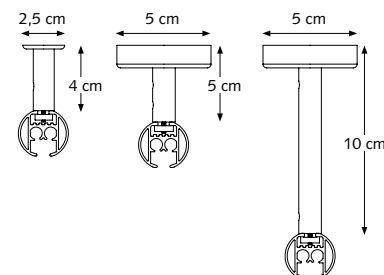

### CRS Wall Bracket, single


8 cm (3,1"), 12 cm (4,7") and 16 cm (6,3")

(Base plate for the 12 cm (4,7") and 16 cm bracket is 6,2 cm (2,4"), similar to the double wall brackets.)




### CRS Wall Bracket, double

16 cm (6,3")

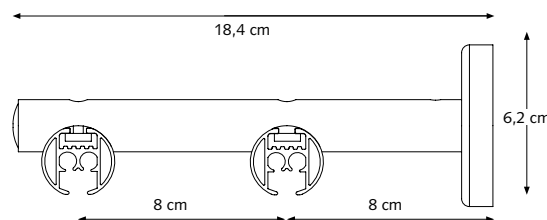


### CRS Wall Bracket, double

16 cm (6,3") Ø 20 mm (0,8") (manual) / 28 mm (1,1") (corded)

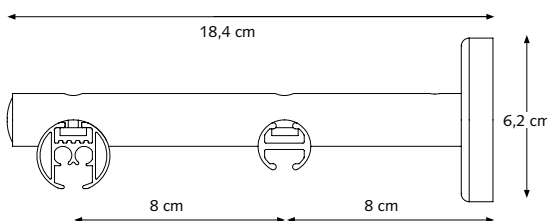

### CRS Wall Bracket, double

20 cm (7,87") Ø 28 mm (1,1")

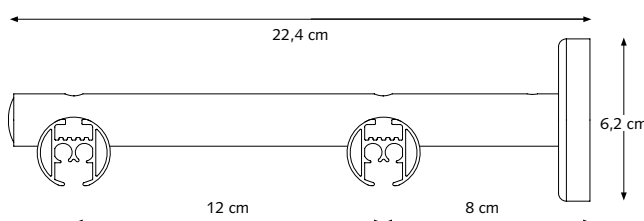

# FOREST DS-XL® corded



With the DS-XL® Series, Forest offers curtain tracks that optimally combines design and functionality. The Design System XL gives every interior an extra visual appearance.

Stylish curtains deserve an elegant and fashionable curtain track. The DS-XL® Series provide a sleek finish and contribute to a unique design look at home or in any hotelroom.

Thanks to a symmetrical profile, the system can be mounted "blind" to the ceiling. This provides an extra sleek finish. The track is easy to mount by means of swivel supports or click supports.

The DS-XL® track system has been especially designed for use with our wave system, Forest Easyfold System. But it is also suitable with regular pleated curtain headings.


## PRODUCT INFORMATIE

- Elegant and aesthetical corded curtain track system.
- For all types of medium weight draperies.
- Quick and easy installation.
- Ceiling brackets and wall brackets available.
- Invisible ceiling brackets to fix track flush to ceiling available.
- Heavy duty carriers - uv protected - for smooth and easy traversing.
- Colours available: white, grey or anthracite with matching assembly components.
- Available length: standard stock size 6 meter (19.8").
- Especially designed for use in combination with our wave pleat system 'Forest Easyfold System'.
- Unique warranty: 10 years.



## PROFILE

- Shown actual size 1:1
- Weight: 480 gr/meter
- Aluminium extrusion
- Size: 60 x 15 mm
- Colours: white, grey, anthracite

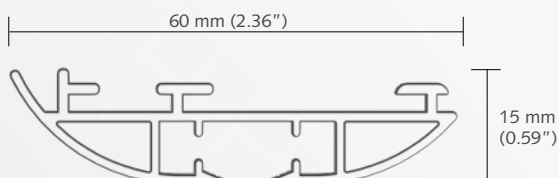

## COLOUR OPTIONS

De DS-XL® is available in three colours: white, grey and anthracite.



## FOR USE IN

Hotels, offices, residences, boats, campers, planes or anywhere an efficient and elegant track system is required for curtains and drapes.















*Easyflex tape application on DS-XL® track.*














## FOREST EASYFOLD SYSTEM





Opt for a regular pleated heading or choose for a more atmospheric effect for the Forest Easyfold System. The FMS® system has been designed for use with the Forest Wave-system. Our wave system is designed so that the curtains maintain their folding effect from the moment they are dressed.













For more information about our wave system and basic components please refer to our Forest Easyfold brochure.





CKS corded	CCS corded	CRS corded	DS-XL corded	CKS TRACK+ PARTS	ARTICLE	PACKING UNIT	ART.NR
●					CKS TRACK 4 mtr. 5 mtr. 5 mtr. 5 mtr. 6 mtr.	20/bundle  white white grey black white	1501001400 1501001500 1501003500 1501006500 1501001600
●					CARRIER ASYMMETRICAL "Clickable", offset, constructed of UV re- sistant plastic. 10 Carriers on a break-away strip. Can be clicked in after installation. Also symmetrical carriers available.	500/box  white grey black	1010001000 1010003000 1010006000
●					CKS MASTER CARRIER UNDERLAP R/L Will go through curves.	25/box  white grey black	1515601000 1515603000 1515606000
●					CKS MASTER CARRIER OVERLAP R/L Will go through curves.	25/box  white grey black	1515701000 1515703000 1515706000
●					CKS PULLEY Reversible, for two way draw.	25/box  white grey black	1530101000 1530103000 1530106000
●					CKS END PULLEY SHORT Especially for one-way closing of the curtain.	25/box  white grey black	1530101011 1530103011 1530106011
●					CKS TRACK JOINER	10/box  white grey black	1018401010 1018403010 1018406010
●					CKS CORD CONNECTOR Connects cord to the CKS Master Carrier.	100/box  white black	1530301000 1530306000
					CKS CORD Connector Half Connects cord to the CKS Master Carrier.	100/box  white	1530311000
●	●	●	●		TRAVERSE CORD Polyester drapery cord designed for smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS / CCS / CRS / DS-XL Corded	250 mtr/roll  white grey black	1030401000 1030403000 1030406000





CKS corded	CCS corded	CRS corded	DS-XL corded	CCS TRACK+ PARTS	ARTICLE	PACKING UNIT	ART.NR
	●				CCS TRACK 3.66 mtr. 4.27 mtr. 4.88 mtr. 6.10 mtr. 6.10 mtr. 6.10 mtr.	10/bundle  white white white white grey black	3001001366 3001001427 3001001488 3001001610 3001003610 3001006610
	●				CCS CARRIER SMALL Contract click carrier patented, clickable. UV-resistant POM plastic.	250/box  white grey black	2510101000 2510103000 2510106000
	●				FMS/CCS/MRS WHEEL CARRIER The wheel carrier goes smoothly over a splice.	100/box  white	5210101002











					CCS CORD MASTER CARRIER R/L OVERLAP Multifunctional - reversible arm - will go through curves, will also fit stiffeners and cord connector.	15/box	white grey gold black	3015701000 3015703000 3015702000 3015706000
					CCS MASTER CARRIER UNIVERSAL R/L	15/box	white grey black	3015601000-U 3015603000-U 3015606000-U
					CCS/FMS MASTER CARRIER UNIVERSAL R/L (SINGLE LONG)	15/box	white grey black	3016001000-U 3016003000-U 3016006000-U
					EASYFLEX MASTER CARRIER 90 DEGREE LEFT for center draw	15/box	white black	4815351090 4815356090
					EASYFLEX MASTER CARRIER 90 DEGREE RIGHT for center draw	15/box	white black	4815451090 4815456090
					PROLONGED ARM FOR MASTER CARRIER 150 mm long Click On 150 mm long Click On 200 mm long Click On	15/box	white black white	9500001010 9500006010 9500001020
					CCS PULLEY Voor middensluitend pakket	25/box	white grey black	3030101000 3030103000 3030106000
					INSIDE WALL BRACKET For additional support anywhere the pulley meets the wall.	25/box		3022301000
					END PULLEY SMALL Reversible, for non-stacking side on one way draw.	25/box	white grey black	3030201000 3030203000 3030206000
					CCS RAIL CONNECTOR	10/box	white grey black	2518401000 2518403000 2518406000-A
					CCS CORD CONNECTOR Connects cord to the CCS master carrier.	100/box	white grey black	3030301000 3030303000 3030306000
					CCS DOUBLE CORD CONNECTOR Connects cord to the CCS master carrier.	20/box	white grey black	3030301010 3030303010 3030306010
					TRAVERSE CORD Polyester drapery cord designed for strong smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS/CCS/CRS/DS-XL Corded DS-XL Corded	250 mtr/roll	white grey black	1030401000 1030403000 1030406000











CKS corded	CCS corded	CRS corded	DS-XL corded	CRS TRACK+ PARTS	ARTICLE	PACKING UNIT		ART.NR
					CRS CHANNEL ROD CORDED Ø 28 mm (1.1") Extruded aluminium, chromated, powder coated incl. inlay strip	5.80 mtr/tube	white gold-an inox-an inox-pc antique-pc anthracite-pc chrome	5811281580-PC 5811282580 5811283580 5811283580-PC 5811289580-PC 5811286580-PC 5701287520
					CRS CARRIER ROUND	500/box	white grey black	5810101000 5810103000 5810106000
				 	CRS ADJUSTABLE WALL BRACKET 8CM INCL. COVER  12CM INCL. COVER	10/box	white inox-pc taupe anthracite antique white inox-pc taupe anthracite antique	5830001080 5830003080 5830004080 5830005080 5830009080 5830001120 5830003120 5830004120 5830005120 5830009120














CKS corded	CCS corded	CRS corded	DS-XL corded	CRS TRACK+ PARTS	ARTICLE	PACKING UNIT	ART.NR
		●			EASYFOLD PLASTIC MASTER UNDERLAP	25/box white grey black transparent	4815201010 4815203010 4815206010 4815201000
		●			EASYFOLD PLASTIC MASTER STRAIGHT/ OVERLAP	25/box white grey black transparent	4815101010 4815103010 4815106010 4815101000
		●			FMS MASTER CARRIER UNIVERSAL R/L "CLICK-ON"	15/box white grey black	5215801010-U 5215803010-U 5215806010-U
		●			CRS CORDED END PULLEY COMPLETE	2/box white gold inox-an inox-pc antique-pc taupe-pc anthracite-pc	6130201001-PC 6130202001 6130203001 6130203001-PC 6130209001-PC 6130204001-PC 6130206001-PC
		●			CRS CORDED CENTRE PULLEY COMPLETE	2/box white inox-an inox-pc antique-pc taupe-pc anthracite-pc	6130251001-PC 6130253001 6130253001-PC 6130259001-PC 6130254001-PC 6130256001-PC
		●			CRS RAIL CONNECTOR (6 CM)	10/box	5815200006
		●			CRS CORNER CONNECTOR (5 CM)	10/box	5815200007
	●	●			CCS CORD CONNECTOR	100/box white grey black	3030301000 3030303000 3030306000
	●	●			CCS DOUBLE CORD CONNECTOR	100/box white grey black	3030301010 3030303010 3030306010
●	●	●	●		TRAVERSE CORD Polyester drapery cord designed for smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS / CCS / CRS / DS-XL Coded	250 mtr/roll white grey black	1030401000 1030403000 1030406000
		●			CRS METAL ENDSTOP WITH SCREW for 20 mm (0,8") for 28 mm (1.1")	100/box	5816101000 5816101001
		●			CRS METAL ENDSTOP WITH SCREW-EYE	100/box for 20 mm (0,8") for 28 mm (1.1") for 20 mm long	5816102000 5816102001 5816102002
















CKS corded	CCS corded	CRS corded	DS-XL corded	DS-XL TRACK+ PARTS	ARTICLE	PACKING UNIT	ART.NR
			●		DS-XL RAIL, 6 mtr (19"8")	24 mtr/bundle white grey anthracite	3916101600 3916103600 3916106600
			●		ECONOMY CARRIER SMALL	500/box white black	3910101000 3910106000
			●		EASYFLEX PLASTIC MASTER CARRIER 90 DEGREE	15/box white grey black	3916701000 3916703000 3916706000
			●		DS-XL ENDCAP CORDED	20/box white grey black	3916201000 3916205000 3916206000

					DS-XL TRACK CONNECTOR STRAIGHT	10/box		3916401000
					DS-XL CORD CONNECTOR	100/box	white black	1530301000 1530306000
					TRAVERSE CORD Polyester drapery cord designed for smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS / CCS / CRS / DS-XL Corded	250 mtr/roll	white grey black	1030401000 1030403000 1030406000
					DS-XL END STOP	100/box		3916001000

CKS corded	CCS corded	CRS corded	DS-XL corded	MOUNTING	ARTICLE	PACKING UNIT		ART.NR
					CEILING BRACKET Slides onto the track, powder coated. Regular duty	100/box	white grey black beige	1018001000 1018003000 1018006000 1018012000
					CEILING BRACKET WITH SLOT Slides onto the track, powder coated. Regular duty Slotted support makes fixing curtain track easier.	100/box	white grey black creme beige	1018101000 1018103000 1018106000 1018111000 1018112000
					SMART KLICK CEILING BRACKET Powder coated, "klicks" onto track. Attach with VK-4 mm screw.	100/box	white grey black	1018201000 1018203000 1018206000
					SMART KLICK CEILING BRACKET INCL. COVER CAP	100/box	white grey black	1018201001 1018203001 1018206001
					COVER CAP FOR SMART KLICK BRACKETS Suitable for Smart Klick Wall-and Ceiling bracket.	100/box	white grey black anthracite	1019201000 1019203000 1019206000 1019206600
					FALSE CEILING BRACKET (METAL) For installation on to a suspended (system) ceiling. The track can be fixed in any angle as the bracket is rotatable.	25/box	white black	4519001000 4519006000
					SMART KLICK DOUBLE CEILING BRACKET LARGE Distance between two tracks: 90 mm (3,5")	30/box	white	1018601000
					SMART KLICK DOUBLE CEILING BRACKET SHORT Distance between two tracks: 45 mm (1,8")			1018611000
					FSS MOUNTING BRACKET For concealed installation or ceiling installation in narrow spaces. Heavy Duty.	100/box		7160001000
					KS CEILING SPLICE BRACKET For ceiling installation only, powder coated.	50/box	white grey black	1018501000 1018503000 1018506000
					KS KLICK-ON CEILING BRACKET WHITE For concealed installation without visible brackets, light weight use only.	100/box	white grey black	1018301000 1018303000 1018306000

CKS corded	CCS corded	CRS corded	DS-XL corded	MOUNTING	ARTICLE	PACKING UNIT	ART.NR
●	●				SMART KLICK WALL BRACKET 3,5 cm "Klicks onto track, powder coated. One screw attachment. For light weight use only.	50/box white grey black	1020201035 1020203035 1020206035
					SMART KLICK WALL BRACKET 6 cm "Klicks onto track, powder coated. One screw attachment. For light weight use only.	white grey black	1020201060 1020203060 1020206060
					SMART KLICK WALL BRACKET 7,5 cm "Klicks onto track, powder coated. One screw attachment. For light weight use only.	white grey black	1020201075 1020203075 1020206075
●	●				KS SMART KLICK WALL BRACKET 10 cm	20/box white grey	1020201100 1020203100
					KS SMART KLICK WALL BRACKET 12,5 cm	20/box white grey	1020201125 1020203125
					KS SMART KLICK WALL BRACKET 15 cm	15/box white grey	1020201150 1020203150
					KS SMART KLICK WALL BRACKET 20 cm	15/box white grey	1020201200 1020203200
					KS SMART KLICK WALL BRACKET 25 cm	10/box white grey	1020201250 1020203250
					KS SMART KLICK WALL BRACKET 30 cm	10/box white grey	1020201300 1020203300
●	●				KS SMART KLICK WALL BRACKET DOUBLE For light weight use only.	15/box 10 cm 15 cm 20 cm	1020601100 1020601150 1020601200
●	●				KS ADJUSTABLE WALL BRACKET, SINGLE	100/box white grey	1020801115 1020803115
●	●				KS ADJUSTABLE WALL BRACKET, DOUBLE	50/box white grey	1020801195 1020803195
●	●				ALUMINIUM SK WALL BRACKET 7,5 CM SINGLE. "Klicks onto track, powder coated.	20/box white grey black	1020301075 1020303075 1020306075
					ALUMINIUM SK AFSTANDSTEUN 10 cm ENKEL. "Klicks onto track, powder coated.	20/box white grey black	1020301100 1020303100 1020306100
					ALUMINIUM SK AFSTANDSTEUN 15 cm DUBBEL. "Klicks onto track, powder coated.	15/box white grey black	1020301150 1020303150 1020306150
					KS ALUMINIUM SK AFSTANDSTEUN 20 cm DUBBEL. "Klicks onto track, powder coated.	15/box white grey black	1020301200 1020303200 1020306200
					ALUMINIUM SK AFSTANDSTEUN 25 cm TRIPLE. "Klicks onto track, powder coated.	10/box white grey black	1020301250 1020303250 1020305250
●	●				SMART KLICK COVER CAP ALUMINIUM BRACKET UNIVERSAL	50/box white grey black	1021301000 1021303000 1021306000
		●			CRS CEILING BRACKET Ø 20/28 MM with slot	100/box aluminium	5818003000
		●			CRS CEILING BRACKET Ø 20/28 MM with hole	100/box white inox	5818003101 5818003103
		●			MRS CEILING BRACKET SMALL, 1,5 CM	4/box chrome	5718407050

CKS corded	CCS corded	CRS corded	DS-XL corded	MOUNTING	ARTICLE	PACKING UNIT	ART.NR
		●			CRS SWIVEL FOR 28 MM ROD	100/box	5863001000
		●			CRS CEILING SUSPENSION BRACKET 4 CM (1.57") Ø 20/28 MM	2/box white gold inox-an inox-pc black antique-pc anthracite-pc chrome	5818112000 5818122000 5818132000 5818132000-PC 5818162000-PC 5818192000-PC 5818152000-PC 5818012028
		●			CRS CEILING SUSPENSION BRACKET 5 CM (1.96") Ø 20/28 MM	2/box white gold inox-an inox-pc antique-pc	5818112028 5818122028 5818132028 5818132028-PC 5818192028-PC
		●			CRS WALL BRACKET SINGLE 8 CM (3.15") Ø 28 MM	2/box white gold inox-an inox-pc black antique-pc taupe-pc anthracite-pc chrome	5820080128 5820080228 5820080328 5820080328-PC 5820080628-PC 5820080928-PC 5820080428-PC 5820080528-PC 5820080728
		●			CRS WALL BRACKET SINGLE 12 CM (4.72") Ø 28 MM	2/box white gold inox-an inox-pc black antique-pc taupe-pc anthracite-pc chrome	5820120128 5820120228 5820120328 5820120328-PC 5820120628-PC 5820120928-PC 5820120428-PC 5820120528-PC 5820120728
		●			CRS WALL BRACKET SINGLE 16 CM (6.29") Ø 28 MM	2/box white gold inox-an inox-pc black antique-pc taupe-pc anthracite-pc	5820160128 5820160228 5820160328 5820160328-PC 5820160628-PC 5820160928-PC 5820160428-PC 5820160528-PC
		●			CRS WALL BRACKET DOUBLE 16 CM (6.29") Ø 28 MM	2/box white gold inox-an inox-pc black antique-pc taupe-pc anthracite-pc	5822160128 5822160228 5822160328 5822160328-PC 5822160628-PC 5822160928-PC 5822160428-PC 5822160528-PC
		●			CRS WALL BRACKET EXTENSION 4 CM	10/box white gold inox-an inox-pc black antique-pc anthracite-pc chrome	5815201030 5815202030 5815203030 5815203030-PC 5815206030-PC 5815209030-PC 5815205030-PC 5715107040
		●			CRS WALL BRACKET EXTENSION 8 CM	gold inox-an inox-pc black antique-pc chrome	5815102020 5815103020 5815103020-PC 5815106020-PC 5815109020-PC 5715107080
		●			CRS ADJUSTABLE BRACKET EXTENSION	10/box white inox-an inox-pc black antique-pc	5815101070 5815103070 5815103070-PC 5815106070-PC 5815109070-PC
			●		DS-XL KLIK CEILING BRACKET	100/box	3918301000
			●		DS-XL CEILING SWIVEL BRACKET	100/box white anthracite	3818200230 3818205230
			●		DS-XL WALL BRACKET 9 CM	5/box white anthracite	3820001018 3820005018

CKS corded	CCS corded	CRS corded	DS-XL corded	BENDING PARTS AND OTHER ITEMS	ARTICLE	PACKING UNIT	ART.NR
●	●	●	●		TENSION PULLEY White	25/box	1030501000
●	●	●	●		ASSEMBLY TOOL FOR CORD CONNECTOR	1/each	9510000027
●	●	●	●		CORD/CHAIN WALL MOUNT SAFETY BOX SINGLE	25/box	3645702000
●	●	●	●		CORD/CHAIN WEIGHT DESIGN 110 GR WIT	10/box white grey black	3030701000 3030703000 3030706000
●	●	●	●		CHANNEL ROD LUBRICANT SPRAY To lubricate components during assembly.	1/each	5109020000
●					COMPACT BENDING HOUSE, FOR KS/CKS	1/box	1050000000
					CKS BENDING WHEEL ALL-IN incl. strips (60cm)		1051000000
●					CONTINUOUS CURVER Add on tool for the Compact Bending Tool. Designed to create continuous curves and arches in any radius. Includes KS bending strip. For KS and CKS Track only.	1/box	1060200000
●	●				ELECTRIC POWERED BENDER For creating continuous curves. Minimum radius 50 cm.	1/box 230V 110V	1060500000 1060500001
●					CKS REPLACEMENT BENDING STRIP For Compact Bending Tool. Length of strip: 60 cm (23")	1/each	1560100000
					For Continues Curver / electric bender. Length of strip: 7 mtr. (23")		1560300000
●					BENDING WHEELS For electric powered bender. Complete set of 3 wheels.	1/set	
					For KS/CKS track. For CS/CCS track.		1060700000 2560700000
●	●				ELECTRIC POWERED RAILCUTTER 230 Volt EU	1/each	1061100000
					BLADE FOREST CUTTER NEW MODEL	1/each	1061200001
	●				CONTRACT BENDING TOOL For CS/CCS/FMS/CRS/MTS	1/each	2560000000
					CS/CCS/FMS Bending Wheel	1/each	2561000000
	●				CCS BENDING STRIPS, COMPLETE SET For CCS track, length: 90 cm.	1/set	8500000002
					FOR CCS ELECTRIC POWERED BENDER. Length 7 meter (23').	1/each	8500000010
	●				BENDING STANDARD Standard for Contract bending tool 28 mm	1/each	2560800000
	●				BENDING WHEELS For Electric Powered Bender. Complete set of 3 wheels only for CS en CCS rail.	1/set	2560700000



**EASY  
INSTALL**



**CORDED  
CONTROL**

## FOREST CORDED Systems

Heavy duty corded curtain track systems with separate internal cord channels; preventing cord sag and eliminating cord tangle.

CKS® corded | Coded Klick System  
CCS® corded | Coded Contract System  
CRS® corded | Curtain Rod System  
DS-XL® corded | Design System XL

THE WORLD  
BEHIND  
YOUR  
CURTAINS



# FOREST CKS® corded



## PRODUCT INFORMATION

- Highly efficient cord traversing system with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications.
- Bendable; it can be bent and reverse bent by using a 10 cm (4") radius or continuous curved.
- Heavy duty clickable carriers - UV protected - for smooth and easy traversing. Offset shape for straight hanging pleats.
- Can also be used for ripplefold or accordiafold drapery systems.
- Maximum fabric weight:  $\pm 6$  kg per meter (4,5 LBS per ft.). Overall max weight, 40 kg.
- Colours available: white, grey and black.
- Available lengths: 4 meter (13'1"), 5 meter (16'4"), 6 meter (19'8"),).
- Track finish: chromated powder coated with a factory applied patented dry lubricant.
- Warranty: 10 years



Clickable carrier


25 mm  
(1")



Easy installation  
click - position - tighten

## PROFILE


- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 202 grams per meter (2.17 ounce per ft.)
- Dimensions: 14 mm x 20 mm (0,6" x 0,8").



- 1 CKS Track
- 2 KS Carrier
- 3 CKS Master Carrier Overlap
- 4 CKS Master Carrier Underlap
- 5 CKS Pulley
- 6 Ceiling bracket with endcap




## APPLICATIONS

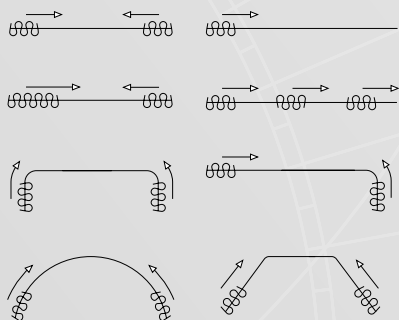

## BENDING / CURVING

The track can be bent and reverse bent using a 10 cm (4") radius. Continuous curving can easily be done using the continuous curver or the electric powered bender.




## FOR USE IN

Hotels - offices - residences - boats - campers - planes or any location where an efficient cord traversing system is required.

## MOUNTING BRACKETS

### Wall bracket

3,5 cm (1,4"),  
6 cm (2,4")




A) Min. 10 cm (4")



A) Min. 15 cm (6")



### SK Ceiling Bracket




### SK Wall bracket aluminium single

A) 7,5 cm (3")

B) 6,3 cm (2,5")

A) 10 cm (4")

B) 8,8 cm (3,5")

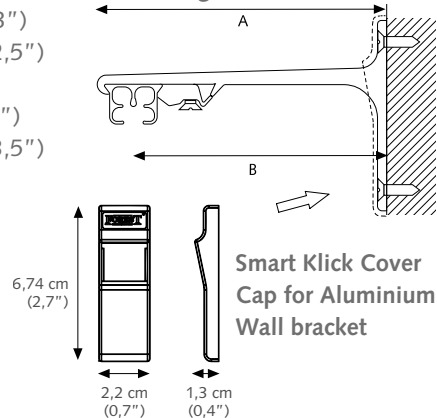

### SK Wall bracket aluminium double

A) 15 cm (6")


B) 9,2 cm (3,6")

C) 4,5 cm (1,8")

A) 20 cm (8")


B) 9,2 cm (3,6")

C) 9,5 cm (3,7")

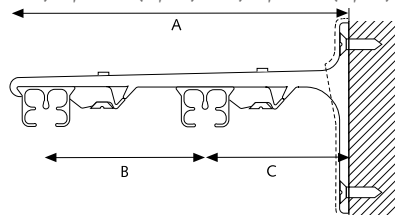

### SK Wall bracket aluminium triple

25 cm (10")

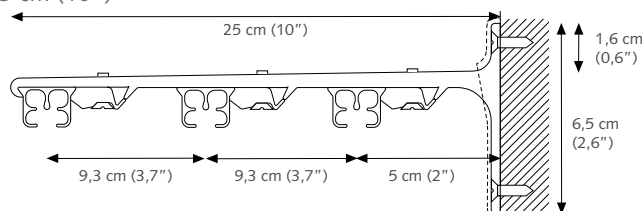

# FOREST CCS® corded



## PRODUCT INFORMATION

- Heavy duty cord operated system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick". brackets for wall and ceiling applications.
- Bendable; it can be bent and reverse bent with a 20 cm (8") radius or continuous curve.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected.
- Can also be used for Forest Easyfold and accordiafold drapery systems.
- Maximum fabric weight: 8 kg. per mtr (5,3 LBS per ft). Overall max weight, 50 kg.
- Colours available: white, grey & black.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Lengths available: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 6.10 m (20').
- Same brackets as used with Klick System.
- Warranty: 10 years.




Easy installation  
click - position - tighten



Clickable carrier

## PROFILE


- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 300 gram per mtr (3.22 ounce per ft)
- Dimensions: 20 mm x 20 mm (3/4" x 3/4")



- 1 Carrier
- 2 CCS/FMS Master Carrier Underlap
- 3 Traverse cord
- 4 CCS/FMS Master Carrier Overlap
- 5 CCS Cord connector
- 6 CCS Track
- 7 Pulley




## APPLICATIONS

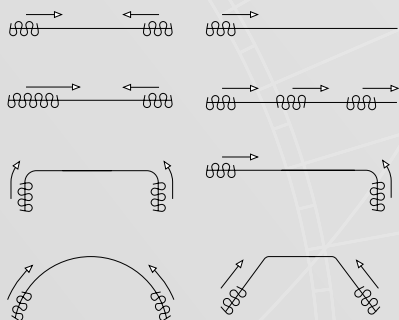

## BENDING / CURVING

The track can be bent and reverse bent using a 20 cm (8") radius. Continuous curving can be done with the electric powered bender or by special order from factory.




## FOR USE IN

Hotels - motels - offices - healthcare - schools - residential or any location where a heavy duty cord traverse system is required.

## MOUNTING BRACKETS

SK Ceiling Bracket




A) Min. 20 cm (8")



SK Aluminium Wall Bracket single

A) 7,5 cm (3") B) 6,3 cm (2,5")

A) 10 cm (4") B) 8,8 cm (3,5")

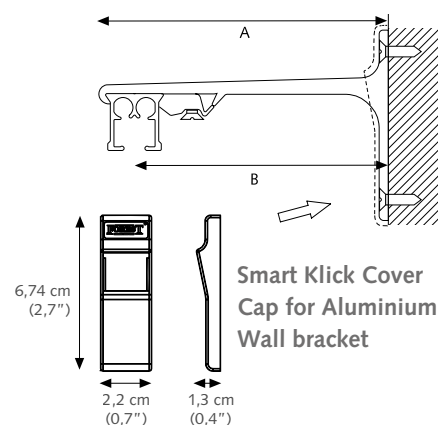


Smart Klick Cover  
Cap for Aluminium  
Wall bracket

SK Wall bracket aluminium double


A) 15 cm (6") B) 9,2 cm (3,6") C) 4,5 cm (1,8")

A) 20 cm (8") B) 9,2 cm (3,6") C) 9,5 cm (3,7")

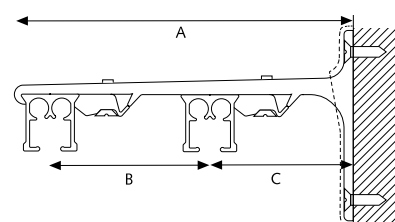

SK Wall bracket aluminium triple

25 cm (10")

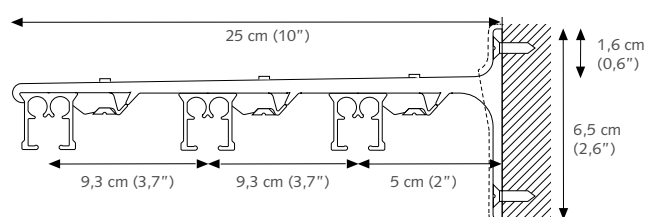

Brackets need to be placed every 50 - 60 cm (20"), depending on fabric weight.

# FOREST CRS® Coded





## PRODUCT INFORMATION

- Elegant and trendy cord-operated channel rod system
- Curtain rod fitted with curtain carriers
- Available dimension: 28 mm (1,1")
- Bendable, both with an inside and outside corner
- Available in 7 colours: White-PC, Gold-AN, Anthracite-PC, Chrome, Inox-AN, Taupe-PC, Antique-PC
- The brackets and endcaps are available in matching colours
- Wide range of decorative finials offering great variety of design options
- Length: 5,80 m (19")
- Rod quality: aluminium, chromated, powder coated or anodized
- Easy and quick assembly
- Forest Easyfold System (FES) for wave pleat also applicable on CRS Coded
- Warranty: 10 years.

## PROFILE


- Shown actual size 1:1
- Weight: 460 grammes per meter
- Aluminium extrusion
- Dimension: 28 mm (1,1")

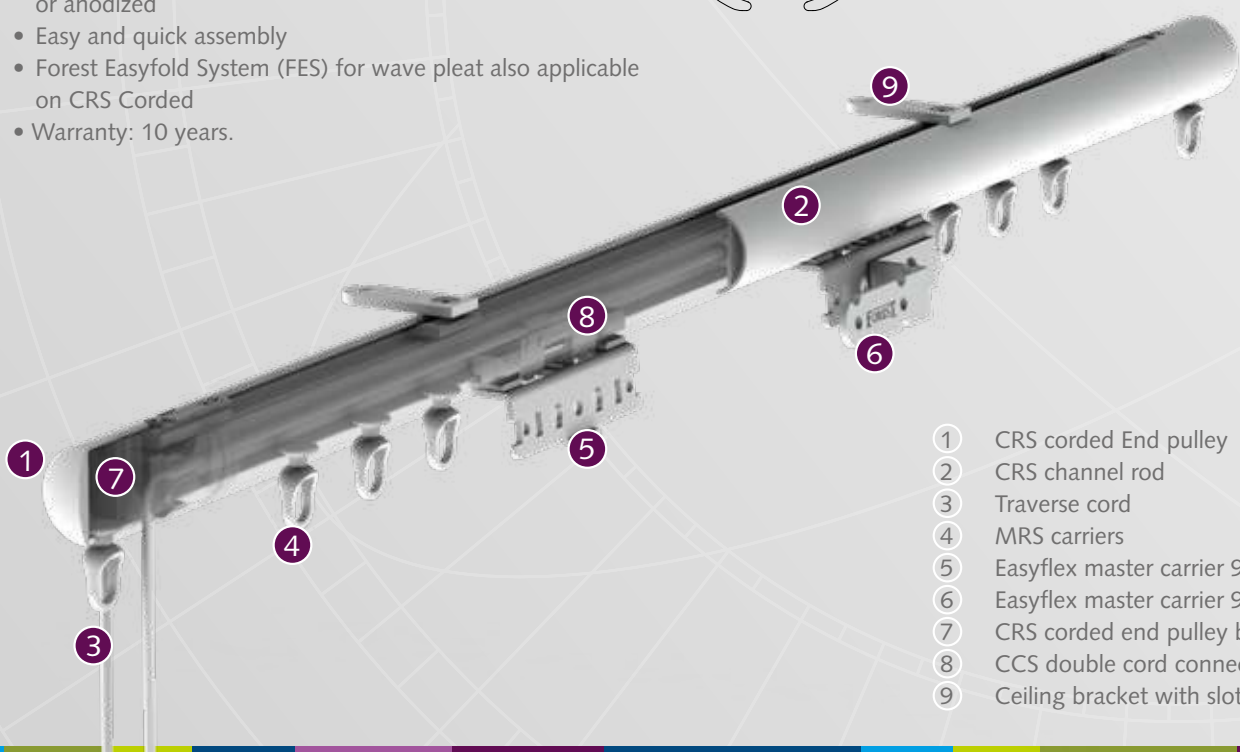

- 1 CRS coded End pulley
- 2 CRS channel rod
- 3 Traverse cord
- 4 MRS carriers
- 5 Easyflex master carrier 90° left
- 6 Easyflex master carrier 90° right
- 7 CRS coded end pulley base
- 8 CCS double cord connector
- 9 Ceiling bracket with slot




## APPLICATIONS



Cross-Section Channel Rod with cord connectors and carriers.

## BENDING / CURVING

The 28 mm (1,1") rod can be curved and reverse curved by using a radius of 20 cm (8").




## FOR USE IN

Domestic and / or contract market, or at any location where a high quality, elegant and corded operated channel rod system is required.

## MOUNTING BRACKETS


### CRS Ceiling Bracket



### CRS Ceiling Support

4 cm (1,6"), 5 cm (2") or 10 cm (4").


20 mm (0,8")/ 28 mm (1,1").

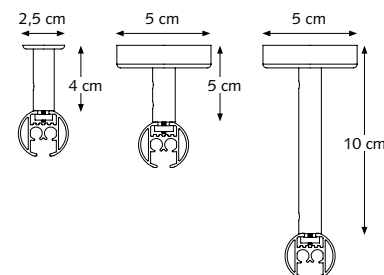

### CRS Wall Bracket, single


8 cm (3,1"), 12 cm (4,7") and 16 cm (6,3")

(Base plate for the 12 cm (4,7") and 16 cm bracket is 6,2 cm (2,4"), similar to the double wall brackets.)




### CRS Wall Bracket, double

16 cm (6,3")

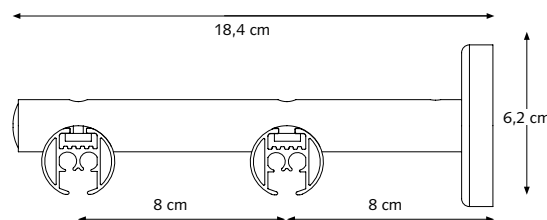


### CRS Wall Bracket, double

16 cm (6,3") Ø 20 mm (0,8") (manual) / 28 mm (1,1") (corded)

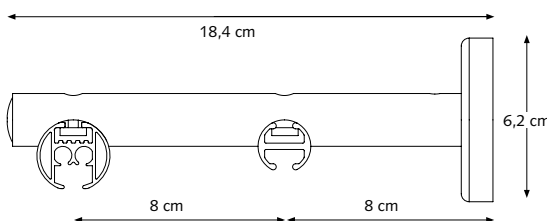

### CRS Wall Bracket, double

20 cm (7,87") Ø 28 mm (1,1")

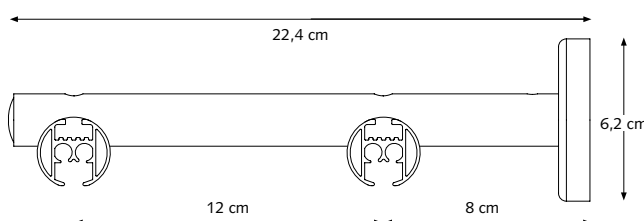

# FOREST DS-XL® corded



With the DS-XL® Series, Forest offers curtain tracks that optimally combines design and functionality. The Design System XL gives every interior an extra visual appearance.

Stylish curtains deserve an elegant and fashionable curtain track. The DS-XL® Series provide a sleek finish and contribute to a unique design look at home or in any hotelroom.

Thanks to a symmetrical profile, the system can be mounted "blind" to the ceiling. This provides an extra sleek finish. The track is easy to mount by means of swivel supports or click supports.

The DS-XL® track system has been especially designed for use with our wave system, Forest Easyfold System. But it is also suitable with regular pleated curtain headings.


## PRODUCT INFORMATIE

- Elegant and aesthetical corded curtain track system.
- For all types of medium weight draperies.
- Quick and easy installation.
- Ceiling brackets and wall brackets available.
- Invisible ceiling brackets to fix track flush to ceiling available.
- Heavy duty carriers - uv protected - for smooth and easy traversing.
- Colours available: white, grey or anthracite with matching assembly components.
- Available length: standard stock size 6 meter (19.8").
- Especially designed for use in combination with our wave pleat system 'Forest Easyfold System'.
- Unique warranty: 10 years.



## PROFILE

- Shown actual size 1:1
- Weight: 480 gr/meter
- Aluminium extrusion
- Size: 60 x 15 mm
- Colours: white, grey, anthracite

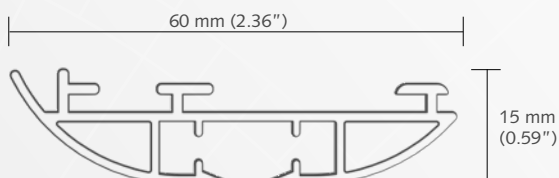

## COLOUR OPTIONS

De DS-XL® is available in three colours: white, grey and anthracite.



## FOR USE IN

Hotels, offices, residences, boats, campers, planes or anywhere an efficient and elegant track system is required for curtains and drapes.















*Easyflex tape application on DS-XL® track.*














## FOREST EASYFOLD SYSTEM





Opt for a regular pleated heading or choose for a more atmospheric effect for the Forest Easyfold System. The FMS® system has been designed for use with the Forest Wave-system. Our wave system is designed so that the curtains maintain their folding effect from the moment they are dressed.













For more information about our wave system and basic components please refer to our Forest Easyfold brochure.





CKS corded	CCS corded	CRS corded	DS-XL corded	CKS TRACK+ PARTS	ARTICLE	PACKING UNIT	ART.NR
●					CKS TRACK 4 mtr. 5 mtr. 5 mtr. 5 mtr. 6 mtr.	20/bundle  white white grey black white	1501001400 1501001500 1501003500 1501006500 1501001600
●					CARRIER ASYMMETRICAL "Clickable", offset, constructed of UV re- sistant plastic. 10 Carriers on a break-away strip. Can be clicked in after installation. Also symmetrical carriers available.	500/box  white grey black	1010001000 1010003000 1010006000
●					CKS MASTER CARRIER UNDERLAP R/L Will go through curves.	25/box  white grey black	1515601000 1515603000 1515606000
●					CKS MASTER CARRIER OVERLAP R/L Will go through curves.	25/box  white grey black	1515701000 1515703000 1515706000
●					CKS PULLEY Reversible, for two way draw.	25/box  white grey black	1530101000 1530103000 1530106000
●					CKS END PULLEY SHORT Especially for one-way closing of the curtain.	25/box  white grey black	1530101011 1530103011 1530106011
●					CKS TRACK JOINER	10/box  white grey black	1018401010 1018403010 1018406010
●					CKS CORD CONNECTOR Connects cord to the CKS Master Carrier.	100/box  white black	1530301000 1530306000
					CKS CORD Connector Half Connects cord to the CKS Master Carrier.	100/box  white	1530311000
●	●	●	●		TRAVERSE CORD Polyester drapery cord designed for smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS / CCS / CRS / DS-XL Corded	250 mtr/roll  white grey black	1030401000 1030403000 1030406000





CKS corded	CCS corded	CRS corded	DS-XL corded	CCS TRACK+ PARTS	ARTICLE	PACKING UNIT	ART.NR
	●				CCS TRACK 3.66 mtr. 4.27 mtr. 4.88 mtr. 6.10 mtr. 6.10 mtr. 6.10 mtr.	10/bundle  white white white white grey black	3001001366 3001001427 3001001488 3001001610 3001003610 3001006610
	●				CCS CARRIER SMALL Contract click carrier patented, clickable. UV-resistant POM plastic.	250/box  white grey black	2510101000 2510103000 2510106000
	●				FMS/CCS/MRS WHEEL CARRIER The wheel carrier goes smoothly over a splice.	100/box  white	5210101002











					CCS CORD MASTER CARRIER R/L OVERLAP Multifunctional - reversible arm - will go through curves, will also fit stiffeners and cord connector.	15/box	white grey gold black	3015701000 3015703000 3015702000 3015706000
					CCS MASTER CARRIER UNIVERSAL R/L	15/box	white grey black	3015601000-U 3015603000-U 3015606000-U
					CCS/FMS MASTER CARRIER UNIVERSAL R/L (SINGLE LONG)	15/box	white grey black	3016001000-U 3016003000-U 3016006000-U
					EASYFLEX MASTER CARRIER 90 DEGREE LEFT for center draw	15/box	white black	4815351090 4815356090
					EASYFLEX MASTER CARRIER 90 DEGREE RIGHT for center draw	15/box	white black	4815451090 4815456090
					PROLONGED ARM FOR MASTER CARRIER 150 mm long Click On 150 mm long Click On 200 mm long Click On	15/box	white black white	9500001010 9500006010 9500001020
					CCS PULLEY Voor middensluitend pakket	25/box	white grey black	3030101000 3030103000 3030106000
					INSIDE WALL BRACKET For additional support anywhere the pulley meets the wall.	25/box		3022301000
					END PULLEY SMALL Reversible, for non-stacking side on one way draw.	25/box	white grey black	3030201000 3030203000 3030206000
					CCS RAIL CONNECTOR	10/box	white grey black	2518401000 2518403000 2518406000-A
					CCS CORD CONNECTOR Connects cord to the CCS master carrier.	100/box	white grey black	3030301000 3030303000 3030306000
					CCS DOUBLE CORD CONNECTOR Connects cord to the CCS master carrier.	20/box	white grey black	3030301010 3030303010 3030306010
					TRAVERSE CORD Polyester drapery cord designed for strong smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS/CCS/CRS/DS-XL Corded DS-XL Corded	250 mtr/roll	white grey black	1030401000 1030403000 1030406000











CKS corded	CCS corded	CRS corded	DS-XL corded	CRS TRACK+ PARTS	ARTICLE	PACKING UNIT		ART.NR
					CRS CHANNEL ROD CORDED Ø 28 mm (1.1") Extruded aluminium, chromated, powder coated incl. inlay strip	5.80 mtr/tube	white gold-an inox-an inox-pc antique-pc anthracite-pc chrome	5811281580-PC 5811282580 5811283580 5811283580-PC 5811289580-PC 5811286580-PC 5701287520
					CRS CARRIER ROUND	500/box	white grey black	5810101000 5810103000 5810106000
					CRS ADJUSTABLE WALL BRACKET 8CM INCL. COVER	10/box	white inox-pc taupe anthracite antique white	5830001080 5830003080 5830004080 5830005080 5830009080 5830001120
					12CM INCL. COVER		inox-pc taupe anthracite antique	5830003120 5830004120 5830005120 5830009120














CKS corded	CCS corded	CRS corded	DS-XL corded	CRS TRACK+ PARTS	ARTICLE	PACKING UNIT	ART.NR
		●			EASYFOLD PLASTIC MASTER UNDERLAP	25/box white grey black transparent	4815201010 4815203010 4815206010 4815201000
		●			EASYFOLD PLASTIC MASTER STRAIGHT/ OVERLAP	25/box white grey black transparent	4815101010 4815103010 4815106010 4815101000
		●			FMS MASTER CARRIER UNIVERSAL R/L "CLICK-ON"	15/box white grey black	5215801010-U 5215803010-U 5215806010-U
		●			CRS CORDED END PULLEY COMPLETE	2/box white gold inox-an inox-pc antique-pc taupe-pc anthracite-pc	6130201001-PC 6130202001 6130203001 6130203001-PC 6130209001-PC 6130204001-PC 6130206001-PC
		●			CRS CORDED CENTRE PULLEY COMPLETE	2/box white inox-an inox-pc antique-pc taupe-pc anthracite-pc	6130251001-PC 6130253001 6130253001-PC 6130259001-PC 6130254001-PC 6130256001-PC
		●			CRS RAIL CONNECTOR (6 CM)	10/box	5815200006
		●			CRS CORNER CONNECTOR (5 CM)	10/box	5815200007
	●	●			CCS CORD CONNECTOR	100/box white grey black	3030301000 3030303000 3030306000
	●	●			CCS DOUBLE CORD CONNECTOR	100/box white grey black	3030301010 3030303010 3030306010
●	●	●	●		TRAVERSE CORD Polyester drapery cord designed for smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS / CCS / CRS / DS-XL Coded	250 mtr/roll white grey black	1030401000 1030403000 1030406000
		●			CRS METAL ENDSTOP WITH SCREW for 20 mm (0,8") for 28 mm (1.1")	100/box	5816101000 5816101001
		●			CRS METAL ENDSTOP WITH SCREW-EYE	100/box for 20 mm (0,8") for 28 mm (1.1") for 20 mm long	5816102000 5816102001 5816102002
















CKS corded	CCS corded	CRS corded	DS-XL corded	DS-XL TRACK+ PARTS	ARTICLE	PACKING UNIT	ART.NR
			●		DS-XL RAIL, 6 mtr (19"8")	24 mtr/bundle white grey anthracite	3916101600 3916103600 3916106600
			●		ECONOMY CARRIER SMALL	500/box white black	3910101000 3910106000
			●		EASYFLEX PLASTIC MASTER CARRIER 90 DEGREE	15/box white grey black	3916701000 3916703000 3916706000
			●		DS-XL ENDCAP CORDED	20/box white grey black	3916201000 3916205000 3916206000


					DS-XL TRACK CONNECTOR STRAIGHT	10/box		3916401000
					DS-XL CORD CONNECTOR	100/box	white black	1530301000 1530306000
					TRAVERSE CORD Polyester drapery cord designed for smooth slide, Ø 3.5 mm (0,14"), 16 ply. Suitable for CKS / CCS / CRS / DS-XL Corded	250 mtr/roll	white grey black	1030401000 1030403000 1030406000
					DS-XL END STOP	100/box		3916001000

CKS corded	CCS corded	CRS corded	DS-XL corded	MOUNTING	ARTICLE	PACKING UNIT		ART.NR
					CEILING BRACKET Slides onto the track, powder coated. Regular duty	100/box	white grey black beige	1018001000 1018003000 1018006000 1018012000
					CEILING BRACKET WITH SLOT Slides onto the track, powder coated. Regular duty Slotted support makes fixing curtain track easier.	100/box	white grey black creme beige	1018101000 1018103000 1018106000 1018111000 1018112000
					SMART KLICK CEILING BRACKET Powder coated, "klicks" onto track. Attach with VK-4 mm screw.	100/box	white grey black	1018201000 1018203000 1018206000
					SMART KLICK CEILING BRACKET INCL. COVER CAP	100/box	white grey black	1018201001 1018203001 1018206001
					COVER CAP FOR SMART KLICK BRACKETS Suitable for Smart Klick Wall-and Ceiling bracket.	100/box	white grey black anthracite	1019201000 1019203000 1019206000 1019206600
					FALSE CEILING BRACKET (METAL) For installation on to a suspended (system) ceiling. The track can be fixed in any angle as the bracket is rotatable.	25/box	white black	4519001000 4519006000
					SMART KLICK DOUBLE CEILING BRACKET LARGE Distance between two tracks: 90 mm (3,5")	30/box	white	1018601000
					SMART KLICK DOUBLE CEILING BRACKET SHORT Distance between two tracks: 45 mm (1,8")			1018611000
					FSS MOUNTING BRACKET For concealed installation or ceiling installation in narrow spaces. Heavy Duty.	100/box		7160001000
					KS CEILING SPLICE BRACKET For ceiling installation only, powder coated.	50/box	white grey black	1018501000 1018503000 1018506000
					KS KLICK-ON CEILING BRACKET WHITE For concealed installation without visible brackets, light weight use only.	100/box	white grey black	1018301000 1018303000 1018306000

CKS corded	CCS corded	CRS corded	DS-XL corded	MOUNTING	ARTICLE	PACKING UNIT	ART.NR
●	●				SMART KLICK WALL BRACKET 3,5 cm "Klicks onto track, powder coated. One screw attachment. For light weight use only.	50/box white grey black	1020201035 1020203035 1020206035
					SMART KLICK WALL BRACKET 6 cm "Klicks onto track, powder coated. One screw attachment. For light weight use only.	white grey black	1020201060 1020203060 1020206060
					SMART KLICK WALL BRACKET 7,5 cm "Klicks onto track, powder coated. One screw attachment. For light weight use only.	white grey black	1020201075 1020203075 1020206075
●	●				KS SMART KLICK WALL BRACKET 10 cm	20/box white grey	1020201100 1020203100
					KS SMART KLICK WALL BRACKET 12,5 cm	20/box white grey	1020201125 1020203125
					KS SMART KLICK WALL BRACKET 15 cm	15/box white grey	1020201150 1020203150
					KS SMART KLICK WALL BRACKET 20 cm	15/box white grey	1020201200 1020203200
					KS SMART KLICK WALL BRACKET 25 cm	10/box white grey	1020201250 1020203250
					KS SMART KLICK WALL BRACKET 30 cm	10/box white grey	1020201300 1020203300
●	●				KS SMART KLICK WALL BRACKET DOUBLE For light weight use only.	15/box 10 cm 15 cm 20 cm	1020601100 1020601150 1020601200
●	●				KS ADJUSTABLE WALL BRACKET, SINGLE	100/box white grey	1020801115 1020803115
●	●				KS ADJUSTABLE WALL BRACKET, DOUBLE	50/box white grey	1020801195 1020803195
●	●				ALUMINIUM SK WALL BRACKET 7,5 CM SINGLE. "Klicks onto track, powder coated.	20/box white grey black	1020301075 1020303075 1020306075
					ALUMINIUM SK AFSTANDSTEUN 10 cm ENKEL. "Klicks onto track, powder coated.	20/box white grey black	1020301100 1020303100 1020306100
					ALUMINIUM SK AFSTANDSTEUN 15 cm DUBBEL. "Klicks onto track, powder coated.	15/box white grey black	1020301150 1020303150 1020306150
					KS ALUMINIUM SK AFSTANDSTEUN 20 cm DUBBEL. "Klicks onto track, powder coated.	15/box white grey black	1020301200 1020303200 1020306200
					ALUMINIUM SK AFSTANDSTEUN 25 cm TRIPLE. "Klicks onto track, powder coated.	10/box white grey black	1020301250 1020303250 1020305250
●	●				SMART KLICK COVER CAP ALUMINIUM BRACKET UNIVERSAL	50/box white grey black	1021301000 1021303000 1021306000
		●			CRS CEILING BRACKET Ø 20/28 MM with slot	100/box aluminium	5818003000
		●			CRS CEILING BRACKET Ø 20/28 MM with hole	100/box white inox	5818003101 5818003103
		●			MRS CEILING BRACKET SMALL, 1,5 CM	4/box chrome	5718407050

CKS corded	CCS corded	CRS corded	DS-XL corded	MOUNTING	ARTICLE	PACKING UNIT	ART.NR
		●			CRS SWIVEL FOR 28 MM ROD	100/box	5863001000
		●			CRS CEILING SUSPENSION BRACKET 4 CM (1.57") Ø 20/28 MM	2/box white gold inox-an inox-pc black antique-pc anthracite-pc chrome	5818112000 5818122000 5818132000 5818132000-PC 5818162000-PC 5818192000-PC 5818152000-PC 5818012028
		●			CRS CEILING SUSPENSION BRACKET 5 CM (1.96") Ø 20/28 MM	2/box white gold inox-an inox-pc antique-pc	5818112028 5818122028 5818132028 5818132028-PC 5818192028-PC
		●			CRS WALL BRACKET SINGLE 8 CM (3.15") Ø 28 MM	2/box white gold inox-an inox-pc black antique-pc taupe-pc anthracite-pc chrome	5820080128 5820080228 5820080328 5820080328-PC 5820080628-PC 5820080928-PC 5820080428-PC 5820080528-PC 5820080728
		●			CRS WALL BRACKET SINGLE 12 CM (4.72") Ø 28 MM	2/box white gold inox-an inox-pc black antique-pc taupe-pc anthracite-pc chrome	5820120128 5820120228 5820120328 5820120328-PC 5820120628-PC 5820120928-PC 5820120428-PC 5820120528-PC 5820120728
		●			CRS WALL BRACKET SINGLE 16 CM (6.29") Ø 28 MM	2/box white gold inox-an inox-pc black antique-pc taupe-pc anthracite-pc	5820160128 5820160228 5820160328 5820160328-PC 5820160628-PC 5820160928-PC 5820160428-PC 5820160528-PC
		●			CRS WALL BRACKET DOUBLE 16 CM (6.29") Ø 28 MM	2/box white gold inox-an inox-pc black antique-pc taupe-pc anthracite-pc	5822160128 5822160228 5822160328 5822160328-PC 5822160628-PC 5822160928-PC 5822160428-PC 5822160528-PC
		●			CRS WALL BRACKET EXTENSION 4 CM	10/box white gold inox-an inox-pc black antique-pc anthracite-pc chrome	5815201030 5815202030 5815203030 5815203030-PC 5815206030-PC 5815209030-PC 5815205030-PC 5715107040
		●			CRS WALL BRACKET EXTENSION 8 CM	gold inox-an inox-pc black antique-pc chrome	5815102020 5815103020 5815103020-PC 5815106020-PC 5815109020-PC 5715107080
		●			CRS ADJUSTABLE BRACKET EXTENSION	10/box white inox-an inox-pc black antique-pc	5815101070 5815103070 5815103070-PC 5815106070-PC 5815109070-PC
			●		DS-XL KLIK CEILING BRACKET	100/box	3918301000
			●		DS-XL CEILING SWIVEL BRACKET	100/box white anthracite	3818200230 3818205230
			●		DS-XL WALL BRACKET 9 CM	5/box white anthracite	3820001018 3820005018

CKS corded	CCS corded	CRS corded	DS-XL corded	BENDING PARTS AND OTHER ITEMS	ARTICLE	PACKING UNIT	ART.NR
●	●	●	●		TENSION PULLEY White	25/box	1030501000
●	●	●	●		ASSEMBLY TOOL FOR CORD CONNECTOR	1/each	9510000027
●	●	●	●		CORD/CHAIN WALL MOUNT SAFETY BOX SINGLE	25/box	3645702000
●	●	●	●		CORD/CHAIN WEIGHT DESIGN 110 GR WIT	10/box white grey black	3030701000 3030703000 3030706000
●	●	●	●		CHANNEL ROD LUBRICANT SPRAY To lubricate components during assembly.	1/each	5109020000
●					COMPACT BENDING HOUSE, FOR KS/CKS	1/box	1050000000
					CKS BENDING WHEEL ALL-IN incl. strips (60cm)		1051000000
●					CONTINUOUS CURVER Add on tool for the Compact Bending Tool. Designed to create continuous curves and arches in any radius. Includes KS bending strip. For KS and CKS Track only.	1/box	1060200000
●	●				ELECTRIC POWERED BENDER For creating continuous curves. Minimum radius 50 cm.	1/box 230V 110V	1060500000 1060500001
●					CKS REPLACEMENT BENDING STRIP For Compact Bending Tool. Length of strip: 60 cm (23")	1/each	1560100000
					For Continues Curver / electric bender. Length of strip: 7 mtr. (23")		1560300000
●					BENDING WHEELS For electric powered bender. Complete set of 3 wheels.	1/set	
					For KS/CKS track. For CS/CCS track.		1060700000 2560700000
●	●				ELECTRIC POWERED RAILCUTTER 230 Volt EU	1/each	1061100000
					BLADE FOREST CUTTER NEW MODEL	1/each	1061200001
	●				CONTRACT BENDING TOOL For CS/CCS/FMS/CRS/MTS	1/each	2560000000
					CS/CCS/FMS Bending Wheel	1/each	2561000000
	●				CCS BENDING STRIPS, COMPLETE SET For CCS track, length: 90 cm.	1/set	8500000002
					FOR CCS ELECTRIC POWERED BENDER. Length 7 meter (23').	1/each	8500000010
	●				BENDING STANDARD Standard for Contract bending tool 28 mm	1/each	2560800000
	●				BENDING WHEELS For Electric Powered Bender. Complete set of 3 wheels only for CS en CCS rail.	1/set	2560700000



**DOMOTICS**  
READY



**APP**  
CONTROL



**WIRELESS**  
REMOTE



**TOUCH**  
CONTROL

## FOREST SHUTTLE® & FMS® Series

The Forest Shuttle® curtain motor and the Forest Motorised curtain track System (FMS®) make an unbeatable combination when it comes to a troublefree operated electric curtains.

FOREST SHUTTLE® S  
FOREST SHUTTLE® M  
FOREST SHUTTLE® L  
FOREST SHUTTLE® AC  
FOREST SHUTTLE® iOn

FOREST FMS®  
FOREST FMS® Plus  
FOREST FMS® Plus Recess  
FOREST FMS® Dual



THE WORLD  
BEHIND  
YOUR  
CURTAINS

# FOREST SHUTTLE® Series



When it comes to comfort, the Forest Shuttle® lives up to its expectations. Being able to open and close your curtains remotely, from the comfort of your chair, when you are on holiday, automatically at pre-programmed opening and closing times or even linked to variable sunrise and sunset times. The Forest Shuttle® is the silent force behind the opening and closing of curtains all over the world.

The Shuttle® can be fully integrated in all major home automation systems.

For maximum safety, integrated emergency control ensures manual operation of the drapery in case of power failure.

The smooth and silent running curtain track system can, in addition to remote operation, also be operated by hand. Thanks to Touch Control technology, a gentle pull on the curtain is enough to activate the motor.

## COLOUR OPTIONS SHUTTLE®



White



Grey



Anthracite



Black

## PRODUCT INFORMATION

The Forest Shuttle® family of motors offer the following functions:

- High quality, extremely reliable and ultra silent motor
- Integrated RF multi receiver, for Diamond Sense Remote control or wall switch
- Various control options: App control, Remote Control (RF), Wall Switch Domotics, Building/Hotel Automation, Serial Communication, Z-Wave etc
- Full automatic setting of the limits
- Programming of intermediate positions possible
- Touch Control Technology, gently pulling the curtain by hand will activate the motor. Sensitivity adjustable (except for the Shuttle® AC)
- Integrated Emergency Control with automatic declutch in case of power failure, to ensure a manual operation of the curtains
- Stack-back position programmable to every desired setting
- Can be used in combination with various motorised track systems like FMS System (standard option), FMS Dual Channel system, Motorised Design System (DS-XL LED) and Motorised Rod System (MRS)
- Can be mounted on the left or the right side of the track
- Can be used with curved Forest motorised track systems.
- Integrated Z-Wave Plus as option (only Shuttle® S/M/L) For Skylight System (FSS®) a special Shuttle® M motor with receiver and fixed drive is available
- Tandem motor application possible as well
- Upside down inverted motor mounting available
- Variable velocity with slow start and slow stop
- Warranty: 10 years on motor (2 years on battery pack iOn)



## DECORATIVE TRACK OPTIONS

The whole range of Forest motors' are totally compatible throughout our electrically operated curtain track range including the decorative options like the DS-XL® LED motorised system and the Motorised Rod System (MRS®).



reddot winner 2021



**DS-XL® LED  
DESIGN TRACK**



**MRS®  
MOTORISED  
ROD TRACK**

## SMART HOME DEMO SUITCASE

We have redesigned our demo case for motorised systems. Besides samples of our standard motorised curtain track system, FMS®, and the FMS® Plus with recess profile, you will also find the new two-channel system, FMS® Dual, and our motorised rod system, MRS®. Easily demonstrate app operation thanks to the included WiFi dongle and the Wireless Connector. All other operating modes, accessories and documentation are of course included.



## FOREST SHUTTLE® SERIES

The Forest Shuttle® is offered in 5 versions.

Choose which Forest Shuttle motor best suits your application integration needs:



**SHUTTLE® S**

24 Volt



**SHUTTLE® M**

24 Volt



**SHUTTLE® L**

100 - 240 Volt



**SHUTTLE® AC**

100 - 240 Volt



**SHUTTLE® iOn**

14,8 Volt



# FOREST SHUTTLE® iOn



Our bestselling Forest Shuttle® system is also available in a wireless, battery powered version. The Shuttle® iOn is perfect for areas without nearby power points.

An extensive period of research, development and endurance testing on countless of track set-ups has resulted in the Forest Shuttle® iOn. The Shuttle® iOn's motor is fitted with an internal, removable heavy duty battery pack. Depending on the track size and curtain weight, the battery only needs to be charged 2 to 3 times per year.

You can expect the same unique functionalities as that of the wired Shuttle® L, like Touch Control technology. The motor has an integrated Multi RF receiver, allowing for operation using any Forest remote control option.

## Unique in the market


The Shuttle® iOn can be used in combination with curved tracks (max. 2 bends), which is unique in the market. It fits all Forest motorised track systems, like the FMS® system, FMS® Plus recess system, MRS® motorised rod system and also the DS®-XL motorised design system.

## FOR USE IN

Hotels, offices, residences, boats and yachts, showrooms or anywhere a wireless motorised track system is required for curtains and drapes.

## PRODUCT INFORMATION

- Li-ion rechargeable battery pack
- Suitable for curtains up to 25 kg and 8 meter track length (straight track)
- Suitable for bent/curved curtain tracks with up to 2 bends in, for example, bay windows
- A single full charge will last up to 6 months
- Available colours: white & black

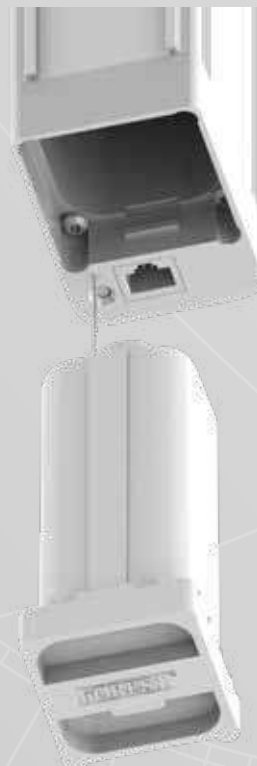

# FOREST SHUTTLE® Control Options

Our wide range of controls make finding a fit for your home even easier; controlling the curtains by hand, remote or even by building automation system. With the remote you can control the curtains in any position you like. When controlling the motorised curtain system by your smartphone or tablet, you can create and schedule customised room scenes that allow your curtains to operate on their own throughout the day.



## REMOTE CONTROL

We offer two types of RF remote controls: the EasyTouch and the Diamond Sense.

- The EasyTouch controls up to 6 systems, with the option to deactivate unused channels.
- The Diamond Sense is a 15- or 2-channel remote with an LED display. Systems can be operated manually or with the integrated timer. The LED display automatically lights up when your hand moves over it.

Both remotes have a range of up to 30 meters.



## APP CONTROL VIA FOREST WIFI-DONGLE

With the Shuttle® Wi-Fi dongle, you can control your motorised curtains with your mobile device by the Forest Connect app or even by voice command with the easy integration in for example Google Home or Amazon Echo without the need for an additional hub or gateway.

## APP CONTROL VIA FOREST WIRELESS CONNECTOR

The Forest Wireless Connector provides an easy solution to make Forest motorised curtains 'smart.' When combined with a smart plug, you can effortlessly control the curtains through a mobile app. Controlling the motorised curtains system by your smartphone or tablet, you can create and schedule customized room scenes that allow your curtains to operate on their own throughout the day.



Scan for more info

If you prefer to use the Forest Connect App, you can opt for Forest's smart plug.

If you wish to operate your curtains with Apple HomeKit, Amazon Alexa, or Google Assistant, you will need a compatible third-party smart plug that works with these smart home apps. This RF device can also be seamlessly integrated into the most common building management systems, including systems with dry contacts.

## BUILDING AUTOMATION / HOTEL CONTROL

The Forest Shuttle® can be connected to any Building Automation system, by relay control.



## SMART DEVICE CONNECTIVITY



Configure the right motorised curtain track system in a few steps.

	Shuttle S/M/L	Shuttle S/M/L with Z-Wave	Shuttle iOn	Shuttle AC	Forest Connect app	Google Home	Apple HomeKit	Amazon Alexa	Google Assistant	Apple Siri
Forest Wireless Connector One way transmitter to control curtains by third party apps or by Domotics. (433Mhz)	●		●		● <sup>1</sup>	● <sup>1</sup>	● <sup>2</sup>	● <sup>1</sup>	● <sup>1</sup>	● <sup>1</sup>
Forest Wi-Fi Dongle in combination with Forest Connect app	●	●			●	●		●	●	●
Smartwares Controller in combination with HomeWizard lite app (433 Mhz)	●		●					●		
Homey in combination with Homey app	●	●	●			●	●	●	●	●
FIBARO System in combination with FIBARO Home Center app		●		● <sup>3</sup>		●	●	●	●	●
Samsung SmartThings Hub in combination with Samsung SmartThings app		●				●	●	●	●	●
230 Volt hard-wired building management system	● <sup>4</sup>			●						

1) In combination with Forest smart plug

2) In combination with Apple Homekit smart plug

3) Only with FIBARO Roller Shutter 3 / Walli Roller Shutter

4) In combination with an AC Control Set

## FOREST SHUTTLE® WORKS WITH



\* Only works with an actor.

Forest Shuttle® is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over other motorised drapery systems in the world!

# FOREST SHUTTLE® Technical information



## SPECIFICATIONS

	SHUTTLE® S	SHUTTLE® M	SHUTTLE® L
Voltage Shuttle	24V DC	24V DC	100 - 240V~ 50 - 60Hz 0.8A
RF Multi Receiver	Internal	Internal, optional	Internal
Power Supply	External, 100 - 240V AC - 0,8A - 50 - 60Hz; Output 24V DC - 2,5A	External, 100-240V AC - 1,5A - 50-60Hz; Output 24V DC - 2,7A	Internal
Max. power	40W	65W	40W
Torque:	1.0 Nm	1.5 Nm	1.0 Nm
Speed:	14-17cm/s	14-17 cm/s	14-17cm/s
Noise Level:	< 40 dB(A)	< 40 dB(A)	< 40 dB(A)
Max. curtain weight (without curves)	40 kg	70 kg	40 kg
Dimensions Motor:	7 x 5 x 20 cm	7 x 5 x 25 cm	7 x 5 x 28 cm
Net. Weight Motor	700 gr.	930 gr.	930 gr.
Dimensions Power Supply	50 x 80 x 30 mm	50 x 110 x 30 mm	-
Protection degree	IP20	IP20	IP20
Max. running time	240 sec (in one direction)	240 sec (in one direction)	240 sec (in one direction)
Colour options	White / Anthracite / Black	White / Grey / Anthracite / Black	White / Anthracite / Grey / Black
Certification & Marking:	CE/FCC	CE/FCC	CE/FCC

## FEATURES

Touch Control technology	✓	✓	✓
Integrated Emergency control	✓	✓	✓
RF Communication Standard	✓	✓	✓
Z-Wave communication	✓	✓	✓
Automation System compatible	✓	✓	✓
Wi-Fi compatible	✓	✓	✓
Works with DS-XL LED Dimmer	✓	✓	✓ (additional adaptor needed)
Works with Wireless Connector	✓	✓	✓
Can be used with curved track	✓	✓	✓
Plug & Play	✓	✓	✓
Warranty	10 Years	10 Years	10 Years



## SHUTTLE® AC

## SHUTTLE® iOn

### SPECIFICATIONS

Voltage Shuttle	100 - 240V~ 50 - 60Hz 0.8A	14.8V DC
RF Multi Receiver	Internal	Internal
Power Supply	Home Automation 230V	Charger Input 100 - 240~, 50-60Hz, 2.0A Charger Output 16,8Vdc 1000mA Removeable Battery Pack
Max. power	40W	30W
Torque:	1.0 Nm	1.0 Nm
Speed:	14-17cm/s	14-17cm/s
Noise Level:	< 41 dB(A)	<40 dB(A)
Max. curtain weight (without curves)	40 kg	25 kg
Dimensions Motor:	7 x 5 x 28 cm	7 x 5 x 32,5 cm
Net. Weight Motor	980 gr.	1160 gr.
Dimensions Power Supply	-	-
Protection degree	IP20	IP20
Max. running time	240 sec (in one direction)	150 sec (in one direction)
Colour options	White	White / Black
Certification & Marking:	CE	CE

### FEATURES

Touch Control technology	-	✓
Integrated Emergency control	✓	✓
RF Communication Standard	✓	✓
Z-Wave communication	-	-
Automation System compatible	✓	✓
Wi-Fi compatible	-	-
Works with DS-XL LED Dimmer	-	✓ (additional adaptor needed)
Works with Wireless Connector	-	✓
Can be used with curved track	✓	✓
Plug & Play	-	✓
Warranty	10 Years	10 Years on motor, 2 years on battery pack

# FOREST MOTORISED TRACK SYSTEM - FMS®



The Forest Shuttle® and the Forest motorised curtain track system (FMS®) make an unbeatable combination when it comes to noiseless operated curtains.

The FMS® System is an elegant system for all types of medium and heavyweight draperies. Available in one piece length of 7 metres. Can be extended up to 14 metres (single stack up to 10 meters). Available in 5 colours: white, matt white, black, matt black or grey, making it suitable to fit in every design.

## FMS® PLUS AND RECESS FIXATION

Instead of a regular ceiling fix or wall fix installation of the FMS® track system, we also offer a solution for a recess fixed motorised curtain track. The FMS® Plus system is ideal for a clean, concealed curtain track installation. The FMS® Plus track and recessed profile are installed after the ceiling has been plastered and finalised. Because the recess profile is coated, the stucco does not adhere to the profile, which can cause cracks. Therefore, we strongly recommend installing the recess profile over the stucco. The motor can be placed in a regular position, or upside down into the ceiling. The system can be fitted with the regular FMS® carriers, rotating carriers or the Forest Wave System for wave pleat.

## FOR USE IN

Hotels, offices, residences, boats and yachts, showrooms, business meeting rooms, conference centers or anywhere a silent motorised track system is required for curtains and drapes.

## PRODUCT INFORMATION

- Compact and noiseless operated motorised track system
- All Shuttle® motors can be used on the FMS® System
- Available in white, matt white, grey, black and matt black
- Components in matching colours
- Clickable off-set carriers for a straight heading of the curtain; roller bearing carriers and Easyflex carriers also available
- Especially designed for use in combination with Forest Wave System
- Motor can be mounted on the left or the right of the track
- One-way draw or center (split) draw curtains possible
- All KS® bracket compatible
- Ceiling brackets and wall brackets available
- FMS® track can be made in lengths of up to 14 meter (single stack up to 10 meters)
- FMS® track can be curved / bent
- Recess fixation possible by recess profile in combination with FMS® Plus track
- Warranty: 10 years

## FMS® DUAL

The FMS® Dual System sets a new standard for motorised curtain tracks in the hotel industry. This innovative two-channel system uses just one motor to operate both channels, creating an adjustable overlap to block out light completely. Ideal for hotels, it ensures a darkened room, perfect for guests needing rest during the day. Easy to install with pre-drilled holes, and additional carriers can easily be added later, even after installation. It supports single, double, and wave pleat curtains via the FES® system.

## BENDING / CURVING


The FMS® track and FMS® Plus track (except recess profile) can be bent and reversed bent with a radius of 20 cm (8"). Continuous curving can be bent and reverse bent with the Electric Powered Bender.



## PROFILE


### FMS® Track

- Weight 303 gr/mtr.
- Size 20 x 20 mm
- Aluminium extrusion
- Colours available: white, matt white, grey, black & matt black




### FMS® Plus Track

- Weight 500 gr/mtr.
- Size 19,6 x 30 mm
- Aluminium extrusion
- Colours available: white & matt black




### FMS® Plus Recess Profile

- Weight 555 gr/mtr.
- Size 26 x 32,20 mm
- Aluminium extrusion
- Colours available: white & matt black



### FMS® Dual

- Weight 1,11 kg/mtr.
- Size 72 x 24 mm
- Aluminium extrusion
- Colour available: white & matt black



## FOREST FMS® TRACKS

The FMS® track system is in four versions available:

### FMS® TRACK



### FMS® PLUS



### RECESS PROFILE WITH FMS® PLUS TRACK




### FMS® DUAL (FOR BLACKOUT)
















G = Gloss

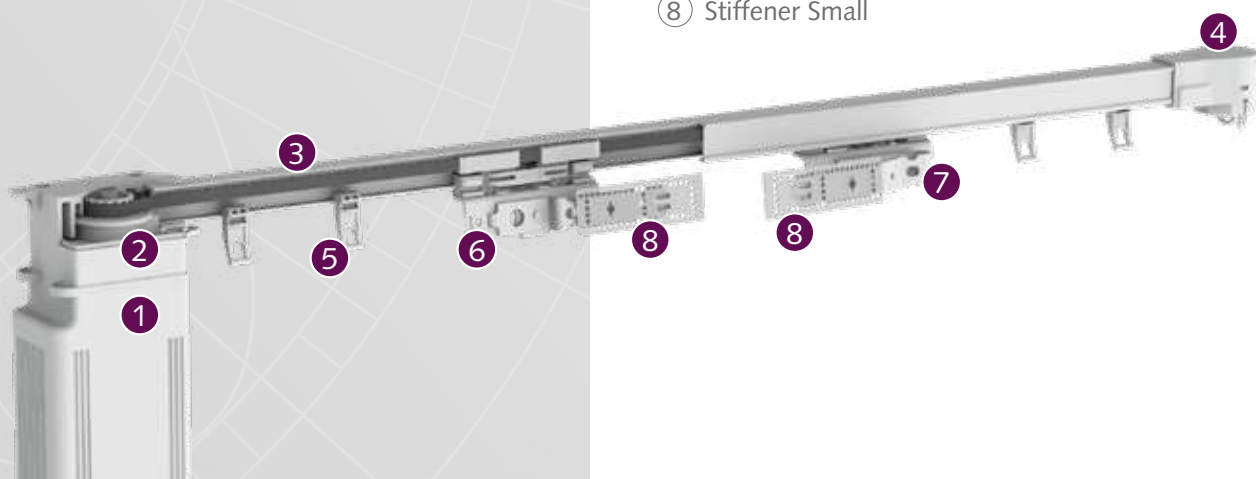


















M = Matt
















- 1 Shuttle® Motor
- 2 Motor Pulley
- 3 FMS® Track
- 4 FMS® Return Pulley
- 5 FMS® Glider
- 6 FMS® Master Carrier Underlap
- 7 FMS® Master Carrier Overlap
- 8 Stiffener Small



FMS	FMS PLUS	FMS DUAL	MOTOR & CONTROL OPTIONS	ARTICLE	PACKING UNIT			ART.NR
●	●	●		SHUTTLE L Motor with internal RF Receiver, Touch Control and Emergency Control. 100 - 240V 50 - 60Hz 0.8A Power supply Dimensions 7 x 5 x 28 cm Up to 45 kg curtain weight	1/box	100-240V 100-240V 100-240V 100-240V 100-240V 100-240V 100-240V	white int. multi receiver white int. Z-Wave receiver white int. Z-Wave rec. ANZ white int. Z-Wave rec. India grey int. multi receiver anthracite int. multi receiver black int. multi receiver black int. Z-Wave receiver EU	5232000001 5232000002 5232000007 5232000069 5232003001 5232005001 5232006001 5232006002
●	●	●		POWER CABLE FOR SHUTTLE S & L	1/box	EU 1.00 mtr EU 4.00 mtr UK 4.00 mtr USA 2.00 mtr AUS 1.80 mtr EU 4.00 mtr	white white white white white black	5201001101 5201001104 5201001134 5201001121 5201001141 5201006104
●	●	●		SHUTTLE M Strongest motor with internal RF Receiver, Touch Control System and Emergency Control. 24 V Power supply 100-240 V adaptor set to be ordered separately. Dimensions 7 x 5 x 25 cm Up to 75 kg curtain weight	1/box	24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC	white int. multi receiver white int. Z-Wave receiver EU white int. Z-Wave US/908Mhz grey int. multi receiver anthracite int. multi receiver black int. multi receiver black int. Z-Wave receiver EU	5232000003 5232000004 5232000006 5232003003 5232005003 5232006003 5232006004
				SHUTTLE M FOR SKYLIGHT SYSTEM (FSS) Motor with fixed drive	1/box	24 Volt DC	white int. multi receiver	7131000000
●	●	●		ADAPTOR SET SHUTTLE M Incl. cable (4 m) and holder	1/box	EU 0.50 mtr UK 0.50 mtr USA 0.50 mtr EU 0.50 mtr	white white white black	5201002002 5201002004 5201002007 5201006002
●	●	●		SHUTTLE S Motor with internal RF Receiver, Touch Control and Emergency Control. 24 V Power supply 100-240 V adaptor set to be ordered separately. Dimensions 7 x 5 x 20 cm Up to 40 kg curtain weight	1/box	24 Volt DC	white int. multi receiver white int. Z-Wave receiver EU anthracite int. multi receiver anthracite Z-Wave receiver EU black int. multi receiver black int. Z-Wave receiver EU	5232000000 5232000010 5232005000 5232005010 5232006000 5232006010
●	●	●		ADAPTOR SET SHUTTLE S Incl. holder / excl. cable	1/box	24 Volt	white	5232003002
●	●	●		SHUTTLE AC Motor with internal RF Receiver and Emergency Control. Only for Building Management System. 100 - 240V 50 - 60Hz 0.8A Power supply Dimensions 7 x 5 x 28 cm Up to 40 kg curtain weight	1/box	100-240V	white	5233000000
●	●	●		SHUTTLE ION Incl. Battery Pack (14.4 V DC) Dimensions 7 x 5 x 32,5 cm Up to 25 kg curtain weight	1/box	Accu Pack	white black	5234000000 5234006000
●	●	●		SHUTTLE ION BATTERY PACK 4-Cell Lithium iOn Capacity 3400mAh	1/box		white black	5234000001 5234006001
●	●	●		SHUTTLE ION CHARGER CABLE 1.20 mtr cable	1/box	EU UK USA AUS	black black black black	5234000002 5234000003 5234000004 5234000005
●	●	●		DC EXTENSION CABLE FOR 24V ADAPTOR For use with Shuttle S/M adaptor and dimmer DS-XL LED	1/box	2 mtr	white	5209002200
●	●	●		AC CONTROL SET Use the AC Control in combination with the Shuttle Motor for Live AC (Domotics) AC Control set complete	1/box	220 Volt	white grey black	5201002202 5201003202 5201006202
				Secondary unit-potential free relay		200V-240V	white grey black	5201002200 5201003200 5201006200
				Secondary unit-potential free relay		100V-120V	white US	5201002203

FMS	FMS PLUS	FMS DUAL	MOTOR & CONTROL OPTIONS & ACCESSORIES	ARTICLE	PACKING UNIT			ART.NR
●	●	●		FOREST EASYTOUCH REMOTE CONTROL 6-channel Equipped with the original RF protocol and Forest Link® protocol. Excl. Wall holder	1/box	Works with all Shuttle motors	matt white matt black	5201081006 5201086006
●	●	●		FOREST EASYTOUCH WALL HOLDER Only suitable for EasyTouch remote control	1/box		transparent	5201080000
●	●	●		FOREST DIAMOND SENSE REMOTE CONTROL 2-15 channel with LED display Integrated timer included Incl. magnetic wall holder	1/box	Works with all Shuttle motors	white black	5201091470 5201096470
●	●	●		FOREST WIRELESS CONNECTOR Incl. 15 cm USB cable. Always in combination with USB-adapter. Can be ordered separately as Forest Wireless Connector USB-adapter.  One way transmitter to control curtains by third party Apps* (i.e. Google / Apple / Amazon) or by Domotics.  *always in combination with Forest smart plug or third party plug	1/box	Works with all Shuttle motors	white	5201002270
●	●	●		ADAPTATEUR USB FOREST WIRELESS CONNECTOR Use in combination with Forest Wireless Connector	1/box		EU UK AU US	5201002271-EU 5201002272-UK 5201002273-AU 5201002274-US
●	●	●		FOREST SMART PLUG WHITE The Forest Smart Plug allows App control via the Forest Connect App (the Forest Wireless Connector is required)	1/box	Works with all Shuttle motors	EU UK AU US	5201001952 5201001953 5201001954 5201001955
●	●	●		FOREST WIFI DONGLE Incl. cable WiFi 2.4GHz Power supply 12V DC 300mA max USB power 5V DC 1000mA max Control the curtains by Forest Connect App Easy integration third party apps by Google / Amazon Bi-directional	1/box	Works with all Shuttle motors except AC and iOn	white black	5201002280 5201006280
●	●	●		FOREST SHUTTLE TWILIGHT SENSOR (KAKU)	1/box	Works with all Shuttle motors (besides Shuttle iOn)	white	5201001951
●	●	●		FOREST WIRELESS WALL SWITCH 2-channel wall switch Dimensions: 8.5 x 8.5 x 1 cm	1/box	Works with all Shuttle motors	white black	5201001480 5201006480
●	●	●		FOREST PULSE WALL SWITCH Can operate one motor only Dimensions: 6.5 x 5.5 x 2.7cm (2.56 x 2.17 x 1.06")	1/box		white	5201001900
●	●	●		SHUTTLE CLICK-ON RF MULTI RECEIVER For use with Forest remote in Z-Wave and building automation environments	1/box		white black	5201001362 5201006362
●	●			FOREST SHUTTLE DEMO FLIGHTCASE METAL Including: Shuttle L with FMS complete, FMS Plus Recess complete, FMS Dual Complete Samples: curved FMS, FMS (White, Grey and Black), MRS, DS-XL motorised, DS-XL LED Motorised, Remote Diamond Sense (White), Wireless Wall Switch (White), WiFi Dongle, Wireless Connector, Forest Smart Plug	Piece			9903000000
●	●	●		VELCRO HOTEL PROFILE Inside frame fix, to reduce light leakage in combination with looptape	120 mtr/ bundle			3581601600
				LOOPTAPE	25 mtr/ roll			3816202020

FMS	FMS PLUS	FMS DUAL	FMS TRACK + COMPONENTS	ARTICLE	PACKING UNIT		ART.NR
●				FMS TRACK - 5.80 mtr (19') 7.00 mtr (23') 7.00 mtr (23') 7.00 mtr (23') 7.00 mtr (23') 7.00 mtr (23')	10/bundle	white white matt white grey black matt black	5101001580 5101001700 5101007700 5101003700 5101006700 5101008700
●				FMS CARRIER Clickable, offset, made of UV-resistant plastic. 10 Carriers on a breakaway strip, can be clicked into the the track after installation.	250/box	white grey black	2510101000 2510103000 2510106000
	●			ECONOMY SLIDE Can turn in the track	500/box	white black	2510601000 2510606000
●				FMS MASTER CARRIER SHORT R/L WHITE For use with single pleat or pinch pleat curtains For use with one way draw curtains To use in combination with Wave Return Pulley	25/box	white black	5215801001 5215806001
●				END STOP UNIVERSAL METAL Suitable for use with a pinch pleat	100/box	matt white grey matt black	8880001000 8880003000 8880006000
●				FMS MASTER CARRIER UNDERLAP CLICK ON Reversible Usable for Click on stiffner	15/box	matt white matt black	5215801010-M 5215806010-M
●				FMS MASTER CARRIER OVERLAP CLICK ON Reversible Usable for Click on stiffner	15/box	matt white matt black	5215901010-M 5215906010-M
●				CCS/FMS MASTER CARRIER UNIVERSAL R/L (SINGLE LONG)	15/box	white matt white grey black matt black	3016001000-U 3016001000-UM 3016003000-U 3016006000-U 3016006000-UM
●				FMS MASTER CARRIER UNIVERSAL R/L "CLICK-ON"	15/box	white matt white grey black matt black	5215801010-U 5215801010-UM 5215803010-U 5215806010-U 5215806010-UM
●				FMS MASTER CARRIER UNIVERSAL R/L "CLICK-ON"	15/box	white matt white grey black matt black	5215901010-U 5215901010-UM 5215903010-U 5215906010-U 5215906010-UM
●				PROLONGED OVERLAP CLICK ON 150 mm long  200 mm long	15/box	white matt white black matt black white	9500001010 9500001010-M 9500006010 9500006010-M 9500001020
●				Z-SHAPED OVERLAP ARM Reversible Z-shaped overlap arm. Fits FMS master carriers. For further reducing of light leakage for center closing.	15/box	white	9500001030
●				STIFFENER CLICK-ON Recommended to attach to the FMS master carriers, stiffner to be stitched into the curtain	15/box		5116001001
●				FMS TRANSPORT BELT Toothed belt, to be installed inside the FMS Track	100mtr/roll		5105501000
●				FMS CONNECTOR To fix the FMS Master Carrier onto the FMS transport belt	50/box	white grey black	5103011500 5103013500 5103016500
●				FMS MOTOR PULLEY Connects motor with FMS Track	1/box	white grey black	5103011000 5103013000 5103016000
				FMS MOTOR PULLEY UPSIDE DOWN	1/box	white	5103011003
●				FMS ANGLE PULLEY 45 degrees adjustable Only for up to 7kg curtain weight (Shuttle M)	1/box	white	5103011010
●				FMS RETURN PULLEY Reverses the FMS transport belt in the FMS track For center draw curtains	1/box	white grey black	5103011100 5103013100 5103016100
●				FMS TRACK JOINER Used to make a solid connection between two pieces of track	10/box	white matt white grey black matt black	2518401000-A 2518401000-A-M 2518403000 2518406000-A 2518406000-A-M








FMS	FMS PLUS	FMS DUAL	WAVE COMPONENTS FOR FMS	ARTICLE	PACKING UNIT		ART.NR
●				WAVE ADJUSTABLE MASTER CARRIER UNDERLAP For use with wave pleat curtains (Easyflex)	25/box	white grey black	4813001050 4813003050 4813006050
●				WAVE BELT CONNECTOR CENTER DRAW For use with wave pleat curtains (Easyflex) To use in combination with adjustable wave carrier	50/box	white grey black	4813001040 4813003040 4813006040
●				WAVE BELT CONNECTOR ONE-WAY DRAW For use with wave pleat curtains (Easyflex) To use in combination with adjustable wave carrier	50/box	white grey black	4813001030 4813003030 4813006030
●				WAVE RETURN PULLEY MOTORISED For use with wave pleat, single or pinch pleat curtains For wave pleat curtains use in combination with adjustable wave carrier (Easyflex) For single/pinch pleat curtains use in combination with FMS Master carrier short R/L	25/box	white grey black	4813001060 4813003060 4813006060
●				FES UNIVERSAL ADJUSTABLE END STOP Only applicable in combination with Wave Return Pulley Motorised	25/box	white black	4816001001 4816006001
●				FMS RETURN PULLEY EASYFLEX For use with wave pleat curtains (Easyflex) For single draw curtains	1/box	white grey black	5103011102 5103013102 5103016102
●				WAVE ADJUSTABLE HOOK MOTOR For use with wave pleat curtains (Easyflex)	25/box	white grey black	4813001010 4813003010 4813006010
●				WAVE ADJUSTABLE HOOK RETURN PULLEY For use with wave pleat curtains (Easyflex)	25/box	white grey black	4813001020 4813003020 4813006020
●				EASYFLEX MASTER CARRIER LEFT For use with wave pleat curtains (Easyflex) For center draw	25/box	white grey black	4815351090 4815353090 4815356090
●				90 degrees left for small stiffener		white	4815361090
●				EASYFLEX MASTER CARRIER RIGHT For use with wave pleat curtains (Easyflex) Center draw	25/box	white grey black	4815451090 4815453090 4815456090
●				90 degrees right for small stiffener			4815461090
●				EASYSNAP MASTER CARRIER LEFT For use with wave pleat curtains (Easysnap) 90 degrees	15/box	white	4815301090
●				EASYSNAP MASTER CARRIER RIGHT For use with wave pleat curtains (Easysnap) 90 degrees	15/box	white	4815401090
●				EASYSNAP FMS MASTER CARRIER For use with wave pleat curtains (Easysnap)	15/box	white	4815401000
●				EASYSNAP FMS UNDERLAP L/R For use with wave pleat curtains (Easysnap)	15/box	white	4815401000
●				WAVE STIFFENER CLICK ON 'SMALL' For use with wave pleat curtains (Easyflex/Easysnap) Recommended to attach to the FMS master carriers, stiffener to be stitched into the curtain	15/box	white	4815001001






















FMS	FMS PLUS	FMS DUAL	FMS PLUS TRACK + COMPONENTS	ARTICLE	PACKING UNIT		ART.NR
	●			FMS PLUS TRACK 7.00 mtr (23')	10/bundle	white matt black	5131001700 5131006700-MAT
	●			FMS PLUS RECESS PROFILE 7.00 mtr (23')	1/piece	white matt black	5131011100 5131016700-MAT
	●			FMS PLUS RECESS PROFILE FIXING STRIP 7.00 mtr (23') length	1 piece	white black	5131001600 5131006600
	●			FMS PLUS RECESS FIXING WEDGE To fix the track into the recess profile	10/box	white black	5131001100 5131006100
	●			FMS-PLUS RECESS OUTER BEND 90 DEGREES Preformed 90-degree bend for FMS PLUS recess profile	1/piece	white matt black	5131001790 5131006790
	●			FMS-PLUS RECESS INNER BEND 90 DEGREES Preformed 90-degree bend for FMS PLUS recess profile	1/piece	white matt black	5131011790 5131016790
	●			ECONOMY CARRIER Can turn in the track	100/box	white black	2510601000 2510606000
	●			FMS PLUS TRANSPORT BELT Toothed belt to be installed inside FMS Plus track 9.3 x 2.2mm Material: KEVLAR	100mtr/roll		5135501001
	●			FMS PLUS MOTOR PULLEY Reverse the FMS PLUS belt in the FMS PLUS track	5/box	white black	5133011000 5133016000
	●			FMS PLUS RETURN PULLEY Reverse the FMS PLUS belt in the FMS PLUS track	5/box	white black	5133011100 5133016100
	●			FMS PLUS MOTOR PULLEY UPSIDE DOWN Can be used to place the motor upside down (recess)	1/box	white	5133011003
	●			FMS PLUS MASTER CARRIER UNDERLAP Arm is reversible, incl. belt connector For use with wave pleat curtains in combination with FES-system (Easyflex)	10/box	white black	5135801000 5135806000
	●			FMS PLUS MASTER CARRIER OVERLAP Arm is reversible, incl. belt connector For use with wave pleat curtains in combination with FES-system (Easyflex)	10/box	white matt black	5135901000 5135906000-M
	●			FMS PLUS MASTER CARRIER EASYFLEX L&R 90 degrees For use with wave pleat curtains in combination with FES-system (Easyflex)	10/box	white black	5135901010 5135906010











GO TO THE FES BROCHURE FOR OTHER FES (WAVE) ITEMS, SUCH AS CARRIERS, TAPE, AND HOOKS.



FMS	FMS PLUS	FMS DUAL	FMS PLUS TRACK + COMPONENTS	ARTICLE	PACKING UNIT		ART.NR
	●			FMS PLUS L-PULLEY To create a double overlapping track system in combination with only one motor	1/box	white	5133011101
	●			FMS PLUS RECESS COVER PLATE	1/box	white black	5133011104 5133016104
	●			FMS PLUS RECESS COVER PLATE UPSIDE DOWN Cover plate for recess; motor pulley	1/box	white black	5133011004 5133016004
	●			CRS DECO / MRS / FMS PLUS TRACK CONNECTOR Suitable for fms plus with recess profile	25/box		5815200005
	●			FMS PLUS BRIDGE 6,5 cm 28 cm	10/box	white white	4518701000 4518601000
	●			FMS PLUS TRACK CONNECTOR PIN Stainless steel, 2 x 20mm For a firm seamless connection	50/box		9900000012
	●			FLEXIBLE DUST STRIP Cover strip to protect the channel during plastering	50 mtr/roll	white	4518501000

FMS	FMS PLUS	FMS DUAL	FMS DUAL TRACK + COMPONENTS	ARTICLE	PACKING UNIT		ART. NR
		●		FMS DUAL Two glide track predrilled, aluminium extrusion, white powder coated, lubricated	1 length/7 mtr	white matt black	3851001700 3851006700-MAT
		●		FMS DUAL UPPER TRACK CONNECTOR Used to make a solid connection between two pieces of track	10/box	aluminium	3851000003
		●		FMS DUAL LOWER TRACK CONNECTOR For optimal guiding of the transport belt between two pieces of track	25/box	white black	3851000002 3851006002
		●		FMS DUAL MOTOR PULLEY Connects motor with track	5/box	white black	3851000004 3851006004
		●		FMS DUAL RETURN PULLEY Reverses the transport belt in the track	10/box	white black	3851000005 3851006005
		●		FMS DUAL ENDSTOP Plastic end stop can be used to set the overlap position	25/box	white black	3851000006 3851006006
		●		FMS DUAL MASTER SET For positioning the 1st carrier	10/box	white black	3851000007 3851006007
		●		FMS DUAL TRANSPORT BELT Toothed belt, to be installed inside the track	100 mtr/roll		3851000001
		●		MCS COVER CAP, 10mm. The cap covers the screw hole and ensures a stylish and ultimate finished look.	500/box	white black	5399999999 5399999996
		●		KS ASYMMETRICAL CARRIER	500/box	white black	1010001000 1010006000
		●		CONTRACT ROLLER CARRIER For a silent and smoothly operation with heavier curtains. Designed for use with butterfly pleats.	100/box	white black	4831001000 4831006000

FMS	FMS PLUS	FMS DUAL	MOUNTING OPTIONS + OTHER ITEMS	ARTICLE	PACKING UNIT		ART. NR
●	●			SMART KLICK CEILING BRACKET Incl. cover cap 'Klicks' onto track, powder coated	100/box	white grey black	1018201001 1018203001 1018206001
●	●			ALUMINIUM WALL BRACKET 7.5 cm single (3'). Maximum load: 25 kg/mtr.	20/box	white grey black	1020301075 1020303075 1020306075
●	●			ALUMINIUM WALL BRACKET 10 cm single (4'). Maximum load: 20 kg/mtr.	20/box	white grey black	1020301100 1020303100 1020306100
●	●			ALUMINIUM WALL BRACKET 15 cm double (6'). Maximum load: 13 kg/mtr.	15/box	white grey black	1020301150 1020303150 1020306150
●	●			ALUMINIUM WALL BRACKET 20 cm double (8'). Maximum load: 9 kg/mtr.	15/box	white grey black	1020301200 1020303200 1020306200
●	●			ALUMINIUM WALL BRACKET 25 cm triple (10'). Maximum load: 5 kg/mtr.	15/box	white grey black	1020301250 1020303250 1020306250
●	●			SMART KLICK COVER CAP ALU WALL BRACKET UNIVERSAL	50/box	white grey black	1021301000 1021303000 1021306000
●	●			FSS MOUNTING BRACKET For concealed installation or ceiling installation in narrow spaces. Heavy Duty.	100/box		7160001000

FMS	FMS PLUS	FMS DUAL	BENDING COMPONENTS + OTHER ITEMS	ARTICLE	PACKING UNIT		ART. NR
●	●			CONTRACT BENDING TOOL BASIC In combination with worktable bending tool	1/each		2560000000
●				FMS CONTRACT BENDING WHEEL radius 20 cm incl. wedges	1/each		2561000000
				FMS PLUS CONTRACT BENDING WHEEL ALL-IN radius 20 cm incl. wedges and bending strips	1/each		5131000000
●				FMS BENDING STRIPS 90 cm T-bending strip	1/each		5160100000
	●			FMS PLUS SET BENDING STRIPS 90 cm	1/each		5131000001
●	●			WORKTABLE BENDING TOOL Stand for contract bending tool	1/each		2560800000
●	●			ELECTRIC POWERED BENDER	1/each	230V 110V	1060500000 1060500001
●				FMS BENDING WHEEL for electric bender, set of 3	1/set		2560700000
				FMS PLUS BENDING WHEEL for electric bender, set of 3	1/set		
●				FMS/CS BENDING STRIP for electric bender 700 cm	1/each		5160100010
	●			FMS PLUS BENDING STRIPS for electric bender	1/piece		5160800000
●	●	●		FOREST LUBRICANT To lubricate components during assembly	1/box		5109010000